

Roadside Manual



**Washington State
Department of Transportation**

Comment Form

From: _____

Date: _____
Phone: _____
E-mail: _____

To: OLYMPIA SERVICE CENTER, DESIGN OFFICE
TRANSPORTATION BUILDING
310 MAPLE PARK AVENUE SE
PO BOX 47329
OLYMPIA WA 98504-7329

Subject: ***ROADSIDE MANUAL***

☐ Marked copies attached.

Comment :

Preserve this original for future use



Submit copies only



Persons with disabilities may request this information
be prepared and supplied in alternate forms by
calling collect 360-664-9009;
deaf and hearing impaired people call
1-800-833-6388 (TTY relay service).

Roadside Manual

Contents

	Page
Comment Form	2
100- Manual Description	5
110- Roadside Functions	7
120- Sustainable Roadside	10
200- Roadside Policy	12
210- Federal Legislation & Policy	13
220- State Legislation & Policy	17
230- Department of Policy & Planning	23
300- Operational Functions	28
310- Roadside Safety	31
320- Signing	41
400- Environmental Functions	43
410- Designated Areas	45
420- Wetlands	51
440- Water Quality	65
450- Wildlife	77
460- Noise Abatement	84
500- Visual Functions	100
600- Auxiliary Functions	111
610- Safety Rest Areas	112
620- Universal Access	140
700- Soil & Soil Amendments	146
710- Erosion Control	159
720- Contour Grading	174
740- Soil Bioengineering	186
800- Vegetation	211
810- Vegetation Restoration	232
820- Irrigation	245
Glossary	255
Index	280

Purpose

The Washington State Department of Transportation (WSDOT) has developed the *Roadside Manual* to provide coordination between all WSDOT partners responsible for roadside activities, and to establish a common basis for consistent roadside management decisions statewide. It also establishes a convenient and accessible reference for new and previously unpublished material related to roadside management including planning, design, construction, and maintenance. In addition, the manual supplements statewide roadside guidelines established in the [Roadside Classification Plan](#).

General

Roadsides are an important component of highway design, operation, and maintenance because of the operational, environmental, visual and auxiliary functions they provide. Properly designed and maintained, roadsides complement the functions of the roadway, integrate the roadway facility into the surrounding landscape and provide a positive psychological effect on vehicle occupants.

Almost one-third of fatal accidents are single vehicle run-off-the-road accidents. Recognition of this fact has led to roadway, traffic barrier, sign, and lighting standard designs that can reduce the seriousness of roadside encroachments. Roadsides can have a significant effect on errant-vehicle occupant safety. Refer to the [Design Manual](#) for guidance on roadway and roadside safety design.

Roadsides include virtually every habitat type that occurs in Washington State. They provide for native plant preservation and revegetation, habitat for animal species, and opportunities for stormwater storage and aquifer recharge.

In addition, there is increasing scientific evidence that roadsides can have a psychological effect on vehicle occupants. Nature-dominated roadsides may relieve drive-related stress and may have an immunizing effect on reaction to future drive-related stresses¹. The inverse has also been shown to be true: drives dominated by human development can increase drive-related stress². These research findings have important implications for

¹ Kaplan, Stephen, "The Urban Forest as a Source of Psychological Well-Being," in Gordon A. Bradley (ed.), Urban Forest Landscapes: Integrating Multidisciplinary Perspectives, University of Washington Press, Seattle, 1995, pp. 100-108.

² Parsons, R., L.G. Tassinary, R.S. Ulrich, M.R. Hebl, and M.M. Grossman, "The View from the Road: Implications for Stress Recovery and Immunization," in Journal of Environmental Psychology, in press.

management of roadsides. Roadsides are important for both physical safety of, and psychological impact on vehicle occupants.

Definitions

The **roadside** is the area outside the traveled way. This applies to all lands managed by WSDOT and may extend to elements outside the right of way boundaries.³ This includes unpaved median strips and auxiliary facilities such as rest areas, roadside parks, viewpoints, heritage markers, pedestrian and bicycle facilities, wetlands and their associated buffer areas, stormwater treatment facilities, park and ride lots, and quarries and pit sites.

Format

This manual is organized around a framework of roadside functions: operational, environmental, visual and auxiliary. Each of these functional areas has relevance to planning, design, construction and maintenance personnel.

To avoid unnecessary duplication, existing WSDOT roadside publications have been outlined, referenced, or transferred to this manual.

Each division in this manual includes the following:

- Resources, including related published material and who to contact for more information.
- Definitions of technical terms specific to the division's subject matter. These and other definitions are also found in the glossary.
- Procedures for accomplishing roadside projects, including coordination and communication procedures, schedules, and required actions. Most chapters include a list of recommended procedures for each subject area.

Revisions

This manual will continue to present the best and most up-to-date information available. It is vital that you, the user, participate in the revision process by using the form provided at the front of the manual to report flaws and to contribute new material.

³ WSDOT owns and manages the land within the right of way boundaries. WSDOT also owns, or has partial investment in, properties outside of the right of way boundaries; for example, wetland mitigation sites. In addition, WSDOT has an interest in elements outside the right of way boundaries which may affect roadway safety.

General**Definitions**

The **roadway** is the portion of a highway, including shoulders, for vehicular use. A divided highway has two or more roadways.

Figure 110.1 shows the extent of the **roadside** and an example of the possible locations of roadside functional features.

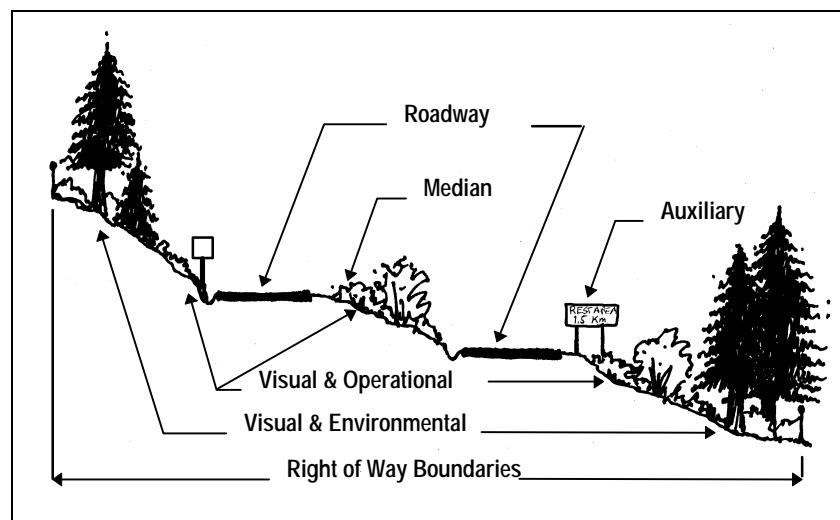


Figure 110.1 Roadside Functional Area Examples

The Washington State Department of Transportation (WSDOT) is responsible for the stewardship of approximately 38,500 hectares [97,500 acres] of roadsides along the 11,371 kilometers [7,066 miles] of state roadway, including hundreds of auxiliary facilities.

Roadside management encompasses planning, design, construction, and maintenance of the roadside environment. The roadside is managed to fulfill four functional categories: operational, environmental, visual, and auxiliary functions. In reality, these functions are interrelated and inseparable but the four functions help communicate the range of roadside management issues.

The roadside provides the essential area for these functions and contributes to WSDOT's delivery of transportation services. Table 110.1 shows the functions and some examples of those functions.

In the next several chapters these examples and their applications are discussed in greater detail.

Function	Examples
operational functions	Those functions that provide safe and multiuse roadsides. Operational functions include access control, and providing recovery areas and sight distances with accommodations for signs and utilities, and snow storage. The <i>Design Manual</i> remains the primary guidance for operational design guidance.
environmental functions	Those functions that protect and enhance our natural and built surroundings. Environmental functions include water quality preservation, protection and improvement, stormwater detention and retention, wetland and sensitive area protection, noxious weed control, noise control, habitat protection, habitat connectivity, air quality improvement, and erosion control.
visual functions	<p>Those functions that are designed and experienced primarily from a visual perspective. Visual functions promote a positive quality of life and are integral to operational, environmental, and auxiliary functions. They include positive guidance and navigation, distraction screening, corridor continuity, roadway and adjacent property buffering, and scenic view preservation.</p> <p>There are two primary roadside views: those from the roadway, and those toward the roadway. In addition, many environmental functions, such as noxious weed control, wetland and sensitive area preservation, and habitat preservation are readily perceived and evaluated through sight.</p>
auxiliary functions	Those functions that provide additional operational, environmental, and visual functions for a complete transportation system. Examples of auxiliary facilities are community enhancement areas, safety rest areas, roadside parks, viewpoints, agricultural uses, heritage markers, bicycle and pedestrian facilities, park and ride lots, and quarries and pits.

Table 110.1 Roadside Functions

Roadside Management

The roadside is managed to fulfill these operational, environmental, visual, and auxiliary functions. Decisions concerning roadside management must be balanced to coordinate and integrate these functions without compromising safety.

Roadside functions vary at different locations according to specific highway and site conditions. Although every area of roadside simultaneously provides many functions, some roadside sections are used primarily to serve very specific functions that are dictated by highway traffic and safety needs, the physical environment, legislated requirements, commitments, and WSDOT policies and programs.

Roadsides are managed in three zones: Zone one, when present, is a vegetation-free zone immediately adjacent to the roadway. Zone two typically contains the clear zone (although in some locations, the Design Clear Zone may extend beyond the right of way line). Zone three extends from Zone 2 to the right of way line, as seen in Figure 110.2. Please see the *Maintenance Manual* or the [Roadside Classification Plan](#) for more information.

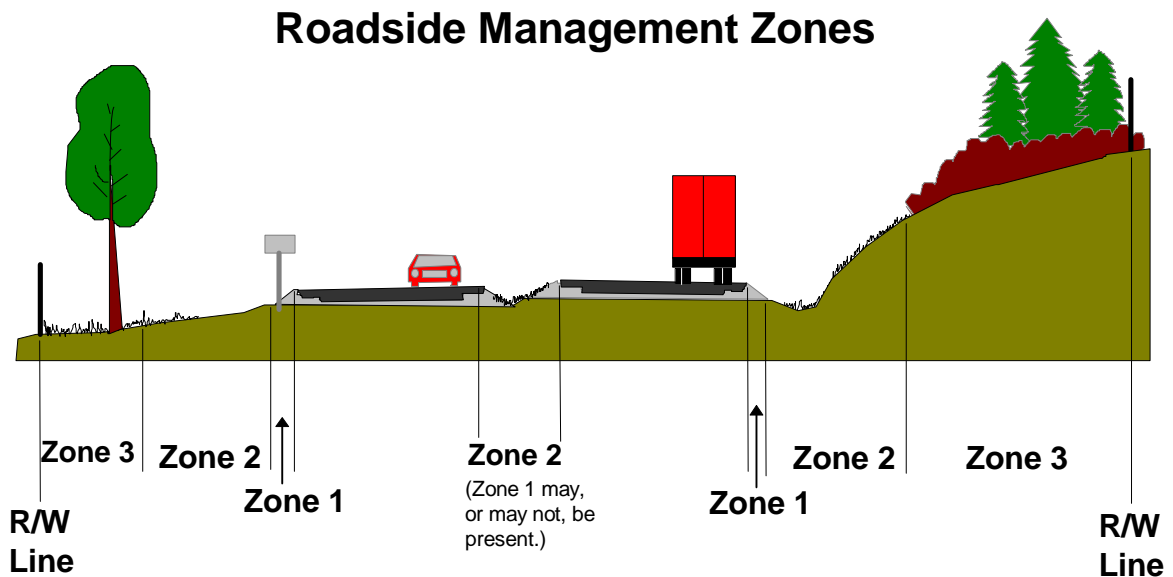


Figure 110.2 Roadside Management Zones

General

Roadside management encompasses roadside planning, design, construction and maintenance. The primary challenge in roadside management is to preserve and restore roadside character and fulfill roadside functions, regardless of fluctuations in funding and personnel. By setting feasible standards and working consistently within long-term goals, roadside management can promote sustainable roadsides.

Reference

Integrated Vegetation Management for Roadsides, WSDOT, July 1997.

Resources

Region Landscape Architects

OSC Roadside and Site Development Office

Definition

Sustainable roadsides are those roadsides that are designed and maintained with the intent of integrating successful operational, environmental, and visual functions with low life cycle costs.

Managing for Sustainable Roadsides

Sustainable roadsides fulfill roadside design intent and roadside functions over the long term, within present and future available funding, personnel, and equipment allocations and methodologies. To achieve sustainable roadsides, roadside partners must strive to utilize, protect, and support the physical and ecological resources necessary for a fully functioning roadside.

The primary management considerations for sustainable roadsides are:

- **Design intent:** Roadside functions (operational, environmental, visual and auxiliary) and maintenance standards, criteria, and actions are coordinated and balanced to the greatest degree possible to achieve the design intent on all levels. Design to achieve the long-term goals of Integrated Vegetation Management (IVM). Refer to *Integrated Vegetation Management for*

Roadsides.


- ***20-year planning horizon:*** All roadside management decisions are weighed in their long-term context, including projected land use and public health, safety, and welfare considerations. Address future adjacent land uses and roadside functions when designing present-day projects.
- ***Projected life cycle costs:*** All roadside management decisions are in keeping with present and future available funding, personnel, equipment, and methodologies. What are the costs of the project over its “lifetime?”
- ***Utilize, protect, and support the roadway and roadside infrastructure:*** All roadside management decisions are balanced with the need to sustain, and to preserve, restore, and enhance the roadside character and natural environment. The emphasis is on careful management of existing and volunteer native vegetation.
- ***Continued cooperative involvement:*** Roadside management decisions are based on continued active involvement between all roadside partners within WSDOT. This begins at the earliest planning stages with communication between all affected parties through an open, collaborative management process and designated lines of communication between roadside partners.

This manual presents criteria and details for implementation of the sustainable roadside concept. All documents pertaining to roadside management such as design documents, construction plans, and area maintenance plans shall be created and implemented using the considerations for managing sustainable roadsides.

General

Roadside policy is governed by a web of jurisdictional entities, and affects planning, design, construction, and maintenance.

An activity is directed by department policy and guidelines that are influenced by federal, state, and local legislation and regulations. Roadside policy is also influenced by public input and tribal legislation.

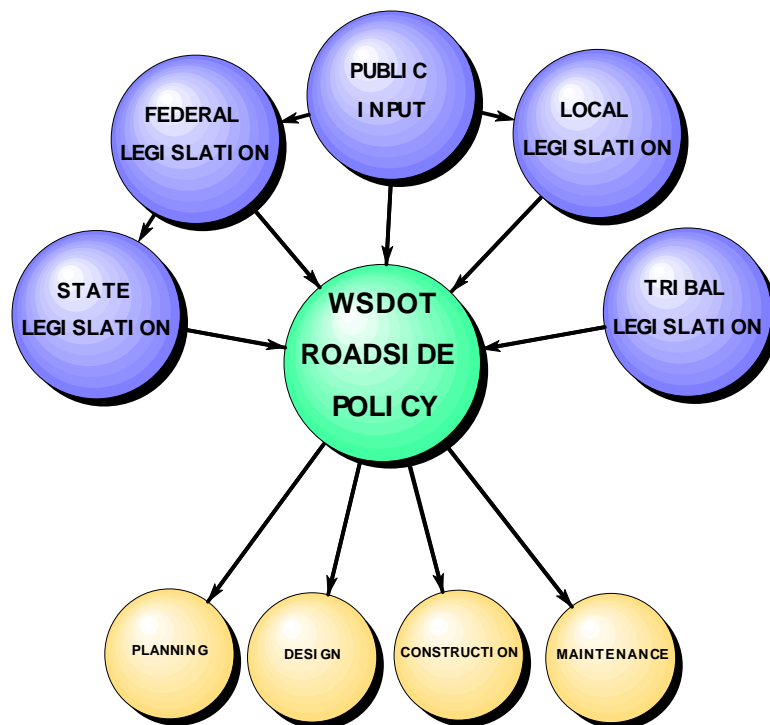

Procedures

Public Involvement

Public involvement in WSDOT roadside activities is conducted in a manner that is consistent with the process established for roadways in general. (See WSDOT *Design Manual* chapter on Public Involvement and Hearings.) It is the department's goal that decisions be made in the best overall public interest and that other agencies and the public be involved early enough to influence project decisions.

General

Federal legislative acts and policies govern many roadside activities. See the *Design Manual* chapter on documentation requirements. The *Environmental Procedures Manual* contains extensive references to laws and directives applicable to the environment. The following is a brief summary of the major acts and policies affecting roadsides.

Planning

Intermodal Surface Transportation Efficiency Acts of 1991 and Transportation Equity Act for the 21st Century of 1998

Emphasizes issues including multimodal transportation; reorganizes transportation funding structures; links transportation, land use, and air quality standards; and mandates a state plan to guide statewide transportation improvement program development.

Americans with Disabilities Act of 1990

Requires all services, programs, and activities, when viewed in their entirety, to be readily accessible to, and usable by people with disabilities.

Federal Highway Administration 1998 National Strategic Plan

The vision for this strategic plan is to create the best transportation system in the world by creating the safest, most efficient, and most effective highway and intermodal transportation system in the world for the American people. <http://www.fhwa.dot.gov/aap/fhplan.html>

Environment

The following list includes legislation, regulations, and guidelines most commonly encountered in roadside activities. For more complete information, see the WSDOT *Environmental Procedures Manual* or contact the Olympia Service Center Environmental Affairs Office. The Federal Highway Administration web site, found at http://www.fhwa.dot.gov/environment/env_sum.htm#A, also contains references to environmental regulations.

Policy

National Environmental Policy Act (NEPA), 42 USC 4321-4347 (1969)

Established to ensure consideration of environmental factors through a systematic interdisciplinary approach before committing the department and FHWA to a course of action.

Declares that it is the “continuous responsibility” of the federal government to “use all practicable means” to “assure for all Americans safe, healthful, productive, and esthetically and culturally pleasing surroundings.”

Water Quality

Clean Water Act, 33 USC 1344

Established to restore and maintain chemical, physical, and biological integrity of the nation’s water through the prevention, reduction, and elimination of pollution. Section 404 addresses discharge of dredge and fill in all waters of the United States, including wetlands, and is enforced by the U.S. Army Corps of Engineers (COE) and the U.S. Environmental Protection Agency (EPA).

Air Quality

Clean Air Act, 42 USC 7401-7642

Established to protect and enhance air quality and to assist state and local governments with air pollution prevention programs.

Biology/ Wetlands

Endangered Species Act of 1973 as amended, 16 USC 1531-1543

Established to conserve species of fish, wildlife, and plants facing extinction.

Rivers and Harbors Act of 1899, 33 USC 401

Protects navigable waters of the United States. Enforced by the U.S. Army Corps of Engineers.

Preservation of Nation’s Wetlands, DOT Order 5660.1A

Provides policy and implementing procedures that require transportation facilities to be planned, constructed, and operated to ensure protection, preservation, and enhancement of the nation’s wetlands to the fullest extent practicable.

Noise

Noise Control Act of 1972, 42 USC 4901 et. seq.

Established to protect the public health and welfare from detrimental noise.

Visual Quality

Design/Maintenance

Presidential Memorandum on Environmentally Beneficial Landscaping, FRL-5054-1 (1994)

Directs federal agencies to lead the country toward more environmentally and economically beneficial landscape practices including:

- Use of regionally native plants.
- Construction with minimal impact to habitat.
- Reduced use of fertilizer, pesticides, and other chemicals.
- Use of water-efficient and runoff-reduction practices.
- Use of demonstration projects employing these practices.

Pertains to all highway programs using federal funds and arranges the development of implementation guidance. Directed these be incorporated into agency landscape guidelines, procedures, and practices by February of 1996.

FHWA Scenic Enhancement Initiatives Memorandum, HRW-12 (1990)

Rescinds 1977 memorandum permitting selective clearing of right of way vegetation to improve visibility of outdoor advertising structures.

Encourages states to retain excess lands that could be used to restore, preserve or enhance the scenic beauty and quality of the highway environment, including scenic vistas, wetlands, and preservation of wildlife habitat.

Surface Transportation and Uniform Relocation Assistance Act of 1987, Section 130.

Requires at least one quarter of one percent of funds expended for landscape projects be used to plant native wildflowers.

23 CFR 750 - “Highway Beautification Act” of 1965 and all subsequent amendments

Establishes provisions and controls to protect the public investment, promote safety and recreation, and preserve natural beauty along federal and primary highway system roadsides including:

- Control of outdoor advertising signs.
- Authorization for information centers at safety rest areas.
- Control of junkyards.

Allocation of 3% of federal aid funds apportioned to states for landscape and roadside development and for acquisition of interest in, and improvement of, strips of land necessary for the restoration, preservation, and enhancement of scenic beauty adjacent to the highways.

State Legislation and Directives

General

See *Design Manual* for safety and documentation requirements. The *Environmental Procedures Manual* contains references to laws and directives applicable to the environment. The following is a brief summary of the major state acts and directives affecting roadsides.

Planning

RCW 47.06, Amended in 1993 by Engrossed House Bill 1007

Directs the Transportation Commission to develop the Transportation Policy Plan for Washington State, and directs WSDOT to develop the Statewide Multimodal Transportation Plan.

Washington State Growth Management Act of 1990 and amendments

Sets goals to guide planning for growth in all communities exceeding a set threshold. Requires designations of natural resource lands and critical areas. Provides for regional transportation planning program.

Requires state agencies to comply with local comprehensive plans and development regulations. Requires local governments to develop a process for siting “essential public facilities.”

Requires certain cities and counties to designate environmentally sensitive areas, including wetlands, flood plains, and habitat.

Environmental

The following list includes legislation, regulations, and guidelines most commonly encountered in roadside activities. For more complete information on state environmental legislation, regulations, and guidelines directly affecting WSDOT actions, see the WSDOT Environmental Procedures Manual or contact the Olympia Service Center Environmental Affairs Office.

General

State Environmental Policy Act (SEPA) and RCW 43.21C

Declares a state environmental policy and promotes efforts to prevent or eliminate damage to the environment, including visual impacts.

State Environmental Policy Act Rules: WAC 197-11

Establishes uniform requirements for agencies and developers to comply with SEPA regulations.

**Transportation Commission and Transportation Department
Environmental Policy Act Rules: WAC 468-12**

Integrates the policies and procedures of SEPA into the programs, activities, and actions of the department.

Water Quality

Puget Sound Water Quality Authority Act: RCW 90.70

Established the Puget Sound Water Quality Authority and directed the Authority to develop a Puget Sound Water Quality Management Plan.

Puget Sound Runoff Program: WAC 173-270

Provides guidelines and criteria for implementation of the program.

Shoreline Management Act of 1971: RCW 90.58

Manages Washington State's shorelines by planning for and supporting all reasonable and appropriate uses.

State Water Pollution control Act: RCW 90.48

Protects all surface and underground waters.

Water Resources Act of 1971; RCW 90.54

Provides for utilization and management of waters in Washington State.

Biology/ Wetlands

Hydraulic Code of Washington, RCW 75.20 and WAC 220-110

Establishes program for regulating activities within the waters of the state for fish protection. Requires hydraulic project approval for actions within the ordinary high water mark. Administered by the Washington State Department of Fish and Wildlife and the Tribes.

Fish Passage, RCW 75.20.060 and RCW 77.16.210

Requires that any structures placed in waters of the state provide for unobstructed passage of fish.

WAC 220-110-070 States that bridges are preferred as water crossing structures by the department in order to ensure free and unimpeded fish passage for adult and juvenile fishes and to preserve spawning and rearing habitat.

Executive Order 89-10: Protection of Wetlands

Provides for “no net loss” of wetlands. Directs each state agency to provide an action plan to minimize the destruction or loss of wetlands and to preserve and enhance their beneficial value.

Executive Order 90-04: Protection of Wetlands

Provides for wetland protection by all state agencies. Defines mitigation and provides for the Department of Ecology to develop guidance and policy on wetland protection.

Noise

Noise Control Act of 1974: RCW 70-107

Expands efforts to abate and control noise while considering the social and economic impact upon the community and the state.

Sound Level Measurement Procedures: WAC 173-58

Establishes standardized procedures to measure sound levels from sources including environmental and construction noise.

Maximum Environmental Noise Levels: WAC 173-60

Establishes maximum noise levels for identified environments.

Visual Quality

Scenic and Recreational Highway Act of 1967: RCW 47.39

Establishes the Scenic and Recreational (S&R) Highways Program and designates more than 1900 miles of scenic highways.

Roadside Improvement and Beautification: RCW 47.40

Outlines permit process for persons wishing to use highway right of way for improvement and beautification. Establishes penalty for destroying native flora on state lands. Mandates litter removal, and authorizes state and local Adopt-a-Highway programs.

Junkyards Adjacent to Interstate and Primary Highways: RCW 47.41

Establishes controls for junkyards adjacent to highways.

Highway Advertising Control Act-Scenic Vistas Act of 1971: RCW 47.42

Amends the Highway Advertising Control Act to include the designated Scenic and Recreational Highways. Controls advertising signs along state highways and their interference with views.

Amended Scenic and Recreational Highway Act of 1967: RCW 47.39 (1990)

Directs WSDOT to develop criteria and a threshold methodology to evaluate highways for possible inclusion in the S&R system. States that scenic and recreational highways are designated because of a need to develop management plans that will protect and preserve the scenic and recreational resources from loss through inappropriate development. States that protection of these resources includes managing land use outside normal highway rights of way, and adds additional routes to the S&R System.

Amended Scenic and Recreational Highway Act of 1967: RCW 47.39 (1993)

Includes 45% of state highways in the Scenic and Recreational Highway (S&R) system. Directs the department to consider the use of the designated system by bicycles and pedestrians. Delegates authority for establishment of planning and design standards for S&R highways.

Scenic Enhancement for Utilities Accommodation on State Highway Rights of Way: WAC 468-34-330

Describes a scenic classification system for utilities accommodation on state highway rights of way as developed through cooperation of WSDOT and the Aerial Utility Industry.

Maintenance

Roadway Safety, RCW 47.32.130

Provides for the removal of elements, such as vegetation, outside WSDOT right of way to increase roadway safety.

Compost Products, RCW 47.28.220

Directs that compost products be purchased and used in projects involving state highway rights of way. As of July 1, 1998 fifty percent of the total dollar amount spent on soil cover or soil amendment shall be spent on composted products containing biosolids. Defines the term “biosolids.”

Integrated Pest Management, RCW 17.15 120

Directs state agencies to use those principles when managing pests.

Fertilizer Regulation, Substitute Senate Bill 6474, Chapter 36, Laws of 1998, effective date: June 11, 1998

- Requires license for distribution of bulk fertilizers.
- Requires identification of those products that are (i) waste derived fertilizers, (ii) micronutrient fertilizers, or (iii) fertilizer materials

containing phosphate.

- Requires a minimum labeling statement that it meet Washington standards for arsenic, cadmium, cobalt, mercury, molybdenum, lead, nickel, selenium and zinc.
- Defines “compost” and “soil amendment.”

Noxious Weed Control, RCW 17.10.145

Directs state agencies to control noxious weeds on their lands.

Preservation, restoration and cleanup of areas disturbed through utility installation, maintenance and repairs: WAC 468-34-340

Outlines criteria for utility use of highway right of way, requires utilities to repair or replace unnecessarily removed or disfigured trees and shrub, and specifies vegetation management practices.

Vegetation Management Program, WAC 173-270-040

States that the purposes of vegetation management in highway rights of way are to establish and maintain stable plant communities that resist encroachment by undesirable plants, noxious weeds, and other pests; meet WSDOT operational, health, natural resources and environmental standards; be cost effective; and protect the public investment with minimal negative impacts on the environment. Requires a vegetation management program for all state highways with the Puget Sound basin.

Partnerships

Adopt a Highway, RCW 47.40.100 and WAC 468-72

Establishes and provides guidelines for state Adopt-a-Highway program. The purpose of the program is to provide volunteers and businesses an opportunity to contribute to a cleaner environment, enhanced roadsides, and protection of wildlife habitats.

Rest Areas

Acquisition of Property for Preservation of Beauty, Historic Sites, Viewpoints, Safety Rest Areas, Buffer Zones: RCW 47.12.250

Authorizes acquisition of property, or interests, or rights to property adjacent to state highways for the stated purposes.

Roadside Areas-Safety Rest Areas: RCW 47.38

Directs the development of rules and establishes limitations on use of rest areas and other roadside areas. Authorizes development of information centers. Establishes recreational vehicle sanitary disposal systems.

Recreational Vehicle RCW 46.16 and 46.68

Authorizes and sets up an account for additional fees charged for recreational vehicles to be used for the construction, maintenance and operation of recreational vehicle sanitary disposal systems at safety rest areas.

Uniform Building Code Requirements for Barrier-Free Accessibility: RCW 19.27 and 70.92

Requires all new structures, and those being substantially renovated, be approachable and usable by persons with disabilities.

Planning***Transportation Commission Policy Catalog***

The Transportation Commission Policy Catalog provides policy guidelines to shape and direct state, regional, and local decisions about the future of Washington's transportation systems. The policy in this catalog was developed through a consensus-based steering committee process staffed by WSDOT and guided by public input. The steering committee was composed of government, business, and interest group representatives from all over the state.

The Policy Catalog can be found on the Internet at:
<http://www.wsdot.wa.gov/commission/documents/default.htm>

The Policy Catalog addresses several issue areas, one of which is environmental protection and energy conservation. The environmental section of the policy catalog states the following three principles:

- Minimize, and avoid when practical, air, water, and noise pollution; energy usage; use of hazardous materials; flood impacts; and impacts on wetlands and heritage resources from transportation activities.
- When practical, and consistent with other priorities, protect, restore and enhance fish and wildlife habitats and wetlands impacted by transportation facilities.
- Coordinate and take the lead in partnering with other agencies in environmental issues affecting transportation to reduce costs and increase effectiveness.

In addition, the *1995 Policy Plan: Report to the Legislature* stated that, "Measures to protect, restore, and enhance the environment must be integrated into the planning, construction, operation, and maintenance of the transportation system."

State Highway System Plan

The State Highway System Plan is the state highway portion of the Washington Transportation Plan (WTP). The WTP was developed, and is updated, by the Washington State Transportation Commission in response to [RCW 47.06](#), as well as to state law and federal laws, such as the [Transportation Equity Act for the 21st Century \(TEA 21\)](#),

and the [Clean Air Act](#).

The WTP specifically defines service objectives and proposes strategies for maintaining, preserving, and improving state highways. This plan forms the basis for development of future state transportation programs, projects, and budgets.

Statewide Roadside Plans

Roadside Classification Plan (1996)

Provides a statewide roadside classification process and guides roadside treatment for the management of safe, environmentally beneficial, and sustainable roadsides. The text of the *Roadside Classification Plan* can be found at the following website:

<http://www.wsdot.wa.gov/eesc/cae/design/roadside/rcp.htm>

Vegetation Management, Environmental Impact Statement (EIS), 1993

Produced in response to proposed anti-pesticide legislation, this document incited a large response from the public with regard to the use of chemical herbicides. As a result, the Department has shifted its roadside management emphasis toward locally based, long-term planning Integrated Vegetation Management (IVM). In addition, the EIS recommended development and use of Roadside Management Plans for each of the area maintenance offices. The plans provide the means for documenting site-specific long term goals and determining the planning and evaluation necessary to achieve those goals.

Region and Route-Specific Roadside Plans

The following planning tools are available in some, but not all, areas.

Corridor Management Plans

WSDOT defines transportation corridors as “accessible, passable routes between points encompassing a traveler’s perspective and experience of the available resources while using a transportation mode (roadway/railway, trail/path, or water route).

A *corridor management plan* is a document composed of maps and written material stating a community’s vision and goals for a scenic byway corridor. This document inventories and assesses the resources of the corridor, and outlines specific strategies and actions to preserve and enhance them.

Roadside Master Plans

Guides roadside related, long-term design and management activities on Washington State highway roadsides. Based on the Roadside Classification Plan, Roadside Master Plans are route-specific conceptual plans prepared for a route, or portion of a route, where conditions require coordination beyond that provided under the Roadside Classification Plan.

Route Development Plans (RDP)

A long-range plan for a specific highway corridor that describes existing highway conditions and local land use plans. Recommends improvements and goals for future improvements and transportation services. The plan is developed through cooperative efforts with affected city, county and regional agencies.

Route Development Plans are route-specific and may include a Roadside Master Plan where roadside planning concerns are identified.

Policies

Environmental

Specific policies found in Washington Transportation Commission's Policy Catalog include:

Water Quality Policy

Minimize and control levels of harmful pollutants generated by transportation activities. Mandates preventing them from entering surface and groundwater resources.

Fish and Wildlife Habitat Protection Policy

Protect, restore, and enhance, where feasible, fish and wildlife habitat and populations within transportation corridors.

Noise Abatement Policy

Minimize noise impacts from transportation systems and facilities.

Wetlands Conservation Policy

Support federal and state "no net loss" policies by protecting, restoring, and enhancing natural wetlands adversely impacted by transportation related construction, maintenance, and operations activities. (Department Directive 31-12)

Use of Hazardous Substances Policy

- Reduce and eliminate, where practical, the reliance of the state's

transportation system on environmentally hazardous substance utilized in the construction and maintenance of transportation facilities.

- Ensure the adoption of best management practices in handling hazardous substances for transportation purposes.

Visual Quality

Visual Quality Policy

Protect and enhance the visual quality of Washington State's transportation corridors and facilities.

For more information on visual impact assessment on Interstate highways see this website:

<http://www.wsdot.wa.gov/EESC/CAE/design/Roadside/VisQual.htm>

Utilities Accommodation Policy

The objective of this policy is to prescribe the means by which utility installations, when located in a manner not interfering with the free and safe flow of traffic or otherwise impairing the highway of its visual quality, may be accommodated within state highway rights of way.

Heritage Resources

State Transportation Policy on Heritage Resources

WSDOT has an interest in preserving, enhancing, and interpreting heritage resources to:

- Provide appropriate access to those resources that have been identified by national, tribal, state, and local resource management entities.
- Provide directional and interpretive signing along the transportation system. Consider directional signing on the transportation system to access cultural, natural, and historical resources only when resources are identified as significant in regional transportation plans or where there are clear economic benefits.
- Assist, where appropriate, with preserving and enhancing heritage resources that are within transportation corridors or are an integral part of the traveling experience along a corridor. Identify significant proposed transportation projects relating to the preservation, enhancement, or interpretation of resources on the transportation system in regional transportation plans.
- Avoid, minimize, or mitigate impacts of transportation projects on heritage resources.

- Cooperate in promoting heritage resources to aid tourism and achieve economic benefits.
- Commit state funding to leverage funding opportunities from other sources for transportation projects that preserve, enhance, and interpret heritage resources within transportation corridors.

Directives

- Adopt a Highway Litter Control Program (D 51-50)
- Safety Rest Areas and Roadside Parks (D 55-96)
- Protection of Wetlands (D 31-12)

References

- [*Construction Manual* \(M 41-01\)](#)
- [*Design Manual* \(M 22-01\)](#)
- [*Environmental Procedures Manual* \(M 31-11\)](#)
- [*Highway Runoff Manual* \(M 31-16\)](#)
- [*Hydraulics Manual* \(M 23-03\)](#)
- [*Maintenance Manual* \(M 51-01\)](#)
- [*Plans Preparation Manual* \(M 22-31\)](#)
- [*Roadside Classification Plan* \(M 25-31\)](#)
- [*Safety Manual* \(M 75-01\)](#)
- [*Scenic Byway Logo Signing Guidelines* \(M 3003.00\)](#)
- [*Standard Specifications for Road, Bridge and Municipal Work* \(M 41-10\) Metric English](#)
- [*Utilities Manual* \(M 22-87\)](#)
- [*Water Quality Manual* \(M 22-15\)](#)
- [*Defining Washington's Heritage Corridors Program*, WSDOT, 1995](#)

General

Roadside operational functions are those that provide for safe, multi-use roadsides. Operational functions include access control, and providing recovery areas and sight distances with accommodations for signs and utilities. They complement *roadway* operational functions.

The most critical of roadside operational functions are those that affect vehicle occupant safety. These will be covered in the Roadside Safety chapter of this manual. The roadside operational features most seen and used by travelers are informational and instructional signs within the roadside right of way limits. In addition, critical features of roadside design include provisions for bicycle and pedestrian safety, maintenance access, and worker safety.

Although operational functions receive priority consideration in all phases of roadside management, sustainable roadsides require integration of operational features with environmental, visual, and auxiliary functions.

References

Design Manual (M 22-01), WSDOT

Hydraulics Manual (M 23-03), WSDOT

Roadside Classification Plan, WSDOT

Traffic Manual (M 51-01), WSDOT

Utilities Accommodation Policy (M 22-86), WSDOT

Utilities Manual (M 22-87), WSDOT

Roadside Design Guide, AASHTO

Design Objectives

Division 7 of the *Design Manual* is the authority for roadside safety. Chapter 310 of this manual discusses aspects of, and possible enhancements to, roadside safety. Chapter 320 discusses signs in the roadside corridor. Other operational design objectives are:

Delineation:

Primary Considerations

Design vegetation and grading to help guide traffic through the highway corridor. For example, plantings in median strips, and the use of directional berms help guide the driver along the roadway.

Hydraulics:

Primary Considerations

Integrate hydraulic elements such as swales, ditches, redirectional berms, and detention/retention basins into roadside designs. Refer to the [Design Manual](#), the [Highway Runoff Manual](#), and the [Hydraulics Manual](#) for hydraulic design objectives.

Snow drift control:

Primary Considerations

Encourage features that act as a reservoir for snow (such as forest growth) where drifting snow is a problem. Gentle slopes can also be used to reduce the accumulation of drifting snow.

Snow storage:

Primary Considerations

In snow belt areas, consider:

- Storage of plowed snow and the direction of snow blown by snow blowing equipment.
- Allowance for snow storage areas in safety rest areas, for example.
- Effect of deicing chemicals on vegetation selected for roadsides in snow belt areas.

Drainage designs need to consider runoff and snow melt while snow is in the storage area. If snow is piled over the top of drainage inlets, the inlets will not function. Rain or melting snow runs down the outside of the snow pile to low areas, forming ponds or flowing across the road. This causes a safety problem on the roadway. Consult the [Hydraulics Manual](#) for drainage design.

Utilities:

Maintain and enhance aesthetic quality when accommodating utilities within the right of way. Locate utilities to make them as visually unobtrusive as practical.

Integrate utility structures into the existing landscape by integrating characteristics of region in which they are located. Consult with the landscape architecture office for compliance with the [Roadside Classification Plan](#).

Primary Considerations

- Integrate utility structures with adjacent vegetation. Use existing and planted trees as backdrops to utility structures.
- Select colors of utility structures to blend into the background. See *Landscape Aesthetics: A Handbook for Scenery Management*, (USFS) for examples.
- Minimize disruption of views from the highway by placing utility structures away from significant views.
- Place utilities underground where practical.
- Scale the utility structure to complement the roadway design speed and the scale of the highway.
- Consider vehicle speeds in utility design. A structure becomes more prominent as design speeds decrease.
- WSDOT lighting requirements are based on light levels. See the [Design Manual](#) and the [Traffic Manual](#), for lighting information.

Additional Sources of Information

Landscape Aesthetics: A Handbook for Scenery Management, United States Forest Service, Agriculture Handbook Number 701, 1995

Manual of Aesthetic Design Practice, Province of British Columbia, Ministry of Transportation and Highways, Highway Engineering Branch, 1991.

General

Safety is the top priority of WSDOT.

Roadside safety addresses the area outside of the roadway. It is an important component of total highway design. Since run-off-road accidents comprise almost one third of all motor vehicle accidents, the physical characteristics of the roadside can either reduce, or increase the seriousness of the consequences of vehicles leaving the roadway.

While safety of vehicle occupants is a major consideration in roadside design, the safety of personnel working along the roadside is also a critical consideration. Some of the same mitigation measures that protect vehicle occupants can allow personnel working in roadside areas escape routes, or shields. Those mitigation measures include making the slope traversable, or installing traffic barriers or earth berms.

WSDOT personnel are trained, and are familiar with the dangers inherent in working in roadside areas. Volunteers, such as Adopt-a-Highway groups, and contractors must also be aware of roadside hazards. Anyone working in roadside areas must wear highly visible vests and protective headgear, and use traffic control measures. In addition, make every effort to have workers face oncoming traffic. Check the Safety Manual and the Construction Manual for more detail.

References

Construction Manual (M 41-01)

Safety

Design Manual (M 22-01)

Sight distance along the roadway

Roadside safety

Traffic safety elements

Sight distance at intersections

Sight distance at road approaches

Sight distance for paths and trails

Roadside Classification Plan, WSDOT

Roadside Design Guide, AASHTO
Safety Manual (M 775-01), WSDOT
Traffic Manual (M 51-02), WSDOT

Resources

- WSDOT Olympia Service Center Safety Office
- WSDOT Olympia Service Center Design Office
- Regional field offices
- WSDOT Adopt-a-Highway coordinator
- Landscape Architecture offices
- Maintenance offices
- Construction offices

Definitions

fixed service item A stationary facility or structure such as a utility box or light standard.

maintenance pull-off A widened shoulder area near fixed service items. Suggested width 4 meters minimum. Suggested length 30 meters maximum.

solar exposure refers to the exposure of the road surface to the rays of the sun. Solar exposure can be blocked by land forms, structures, and vegetation adjacent to the roadway.

Safety of Vehicle Occupants

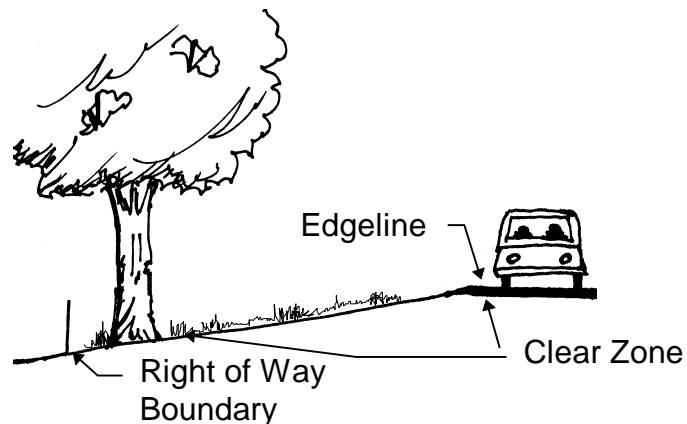


Figure 310.1 Clear Zone Example

Clear Zone

The **clear zone** is the total roadside border area, starting at the edge of the traveled way, available for use by errant vehicles. This area may consist of a shoulder, a recoverable slope, a nonrecoverable slope, and/or a clear run-out area. The clear zone cannot contain a critical slope (slopes steeper than 1:3 are considered critical slopes). The *Design Clear Zone* is the minimum target value used in highway design. In areas with an open character, the clear zone may extend beyond the right of way boundary.

Primary Considerations

Provide a clear zone, as discussed in the *Design Manual*.

On new and major reconstruction projects, grade roadsides to mitigate impacts on errant vehicles whenever reasonable.

- Smooth and flatten slopes so there are no significant discontinuities and the fewest practical protruding fixed objects.
- Round toe of slope to make it traversable, and to assist an encroaching vehicle's contact with the surface.

These actions will have the added visual benefit of a more natural-appearing topography in most regions.

In some instances removal of all trees within the Design Clear Zone may not be desirable (such as within a forest or park). If the impacts are minimal, a barrier or a deviation may be appropriate. In other cases, removal of trees may be necessary to increase driver safety. In these cases, analyze roadside-encroachment-accident reports to determine if roadside vegetation is contributing to accident rates. If vegetation is removed, replace with shrubs or groundcovers.

A deviation is required anywhere that a Design Clear Zone is not provided, or the driver is not protected from hazards.

Sight Distance

The **sight distance** is the length of highway visible to the driver.

The **decision sight distance** is the sight distance required for a driver to 1) detect an unexpected or difficult-to-perceive information source or hazard, 2) interpret the information, 3) recognize the hazard, 4) select an appropriate maneuver, and 5) complete the maneuver safely and efficiently.

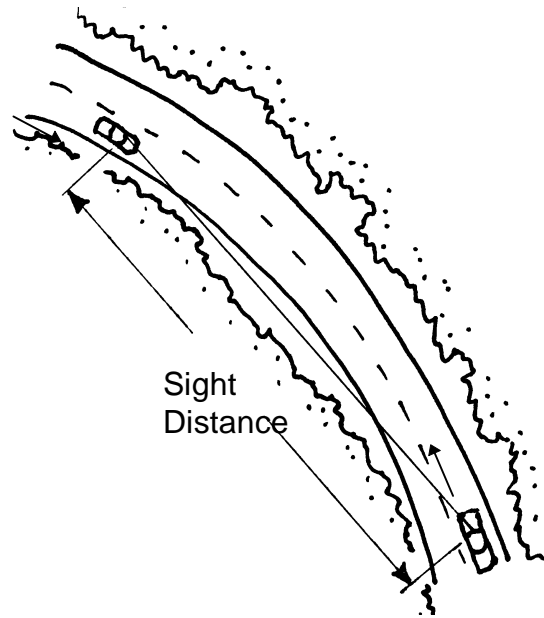


Figure 310.2 Sight distance

It is essential that the driver of a vehicle be able to see far enough to assess developing situations and take appropriate action. Roadside land forms, signs, structures, and vegetation must be designed and maintained to facilitate safe driving.

Primary Considerations

- Allow for adequate sight distance at intersections and at vertical and horizontal curves when designing land forms, and locating signs, vegetation, and other roadside objects. See the [Design Manual](#) for details.
- Within sight distance on the inside of horizontal curves or at intersection approaches, select low-growing vegetation that, at maturity, will not obstruct signs or hazards from the view of the driver.
- Maintain vegetation growth in a desirable condition so that signs are not obscured.
- [RCW 47.32.130](#) provides for the removal of vegetation outside WSDOT right of way to increase roadway safety.

Traffic Barriers

A **traffic barrier** is any type of longitudinal barrier, including bridge rails, guardrails, earthen berms, or impact attenuators used to redirect vehicles from hazards located within the Design Clear Zone; to prevent median crossovers; to prevent errant vehicles from going over

the side of a bridge structure; or to protect workers, pedestrians, or bicyclists from vehicular traffic.

See the [Design Manual](#) for details on their use and placement.

Considerations

There are barrier designs that visually fit into their surroundings. They can be used in sensitive areas, examples are: steel-backed timber rail, weathering steel w-beam, simulated stone concrete barrier, etc. Contact the OSC Design Office for details.

Use these barriers to maintain corridor continuity or where they enhance the existing roadside character, as determined in the [Roadside Classification Plan](#), and where they are evident in, and similar to the adjacent surroundings.

Fire Control

The goal of roadside fire control is to reduce potential fire hazards. One of the objectives of Roadside Management Zone 1 is fire prevention.

Primary Consideration

Do not block access to fire hydrants when the hydrant is located in the right of way. This is a consideration when locating noise walls or thick hedges.

Roadway Shading

Forested areas are cooler in summer and warmer in winter due to the insulating effect of masses of trees. Removal of vegetation can result in problems with sunlight and headlight glare. Analyze the cause of shading to avoid removing trees unnecessarily. Appendix A shows the relationship of sun angle and vegetation to roadway shading.

Too much shading might result in frost, snow, and ice remaining on the roadways, prolonging hazardous driving conditions. However, removing too much vegetation from the roadsides can create a sterile and barren appearance and increase solar glare. If it is determined that removing trees will increase solar exposure, revegetate the affected area with lower growing vegetation in conformance with the [Roadside Classification Plan](#).

Primary Considerations

Before vegetation removal takes place, consider the following:

- Wherever practical, locate structures and trees to limit shading on the road surface during early morning and late evening hours.
- Accident history is available for any given location. Use accident history to evaluate whether icing has contributed to accidents in a particular location. Use accident history information to evaluate if shading by the vegetation is contributing to accident rates.
- Talk to maintenance personnel to determine where icing historically occurs.
- Analyze shading elements prior to the removal of trees and vegetation to determine if that action is warranted. Removal of vegetation will not increase solar exposure if a land form or structure will still be blocking sunlight.
- Deciduous trees that lose their leaves in winter can be used where solar exposure is desired. Planting evergreens to the north of the roadway will generally block wind without obstructing sunlight.

Sunlight and headlight glare

Glare caused by the low angle of the sun in winter, or during the early or late hours of the day can be a serious problem to the motorist. Glare from oncoming headlights can also be a problem.

Primary Considerations

Locate roadside features to screen reflective objects where practical.

- Glare can be blocked with vegetation, glare screens, berms, walls, etc..
- Vegetation in medians can reduce headlight glare.
- Bright lights from land uses, such as adjacent industrial complexes, can be screened by walls or evergreen trees and shrubs.

Tunnel entrances present a particularly difficult situation where the driver's eye must adjust from the bright glare outside the tunnel to lower light levels inside the tunnel. Upon leaving the tunnel, the driver's eye must readjust from the lower light levels inside the tunnel to the bright glare outside. Each of these situations can present hazardous driving conditions for the driver.

Glare at a tunnel entrance can be mitigated with dark evergreen vegetation that helps the driver's eye transition to the lower light levels in the tunnel.

Worker & Pedestrian Safety

Maintenance crew safety

Maintenance access is especially critical in high traffic volume areas.

Primary Considerations

- Follow the *Safety Manual* for traffic control. See possible traffic control plans under *Standard Plans*.
- During the planning and design phases of roadway construction, allow for the widest practical shoulder width near fixed service points. See the *Design Manual*, Division 400 for shoulder width requirements.
- Provide for maintenance vehicle access where shoulder area is limited by providing maintenance pull-offs in a nearby location.
- When other options do not exist, design harness tie off points where crews are able to secure themselves while working in areas with vertical elevation changes greater than 3.5 meters. [WAC 296-155-245](#) provides requirements for “Fall Restrain and Fall Arrest.” The Washington State Department of Labor and Industries enforces this WAC.

Recommendations

Coordinate with the regional Traffic Engineer.

When incorporated into designs, where practical, the following recommendations would enhance worker safety.

- Maintenance pull-off areas or wide shoulders (minimum 4 meters) adjacent to a device or item requiring regular service. Near utility poles, sign bridges, pull-boxes, and junction boxes (fixed service points), the ideal shoulder width is 6 meters.
 - Note: Design these maintenance pull-off areas to support vehicles with a wide-stance and outriggers (Sign Trucks, aerial manlifts, portable VMS trailers). Balance this cost against the future cost of extensive lane and traffic control, the hazard of road crew exposure to traffic, and restriction of traffic flow.
 - Fill material for these shoulders must be flat, located above the Ordinary High Water Level of nearby surface waters, and be firm enough to

support the weight of a 15,900 kilogram maintenance vehicle. The footprint of these vehicles is 10.5 meters long by 3.5 meters wide.

- Place junction boxes, vaults and other fixed service points on the right side of the roadway (rather than in median strips) as much as practical, with as much parking and re-entry area as practical.
- When fixed service points such as transmitters, cabinets, camera poles and sediment ponds are more than 7.5 meters from the roadway edge, provide an access support road capable of supporting large (14, 500 kilogram) service vehicles. The configuration in Figure 310.4 is not as noticeable to passing motorists.

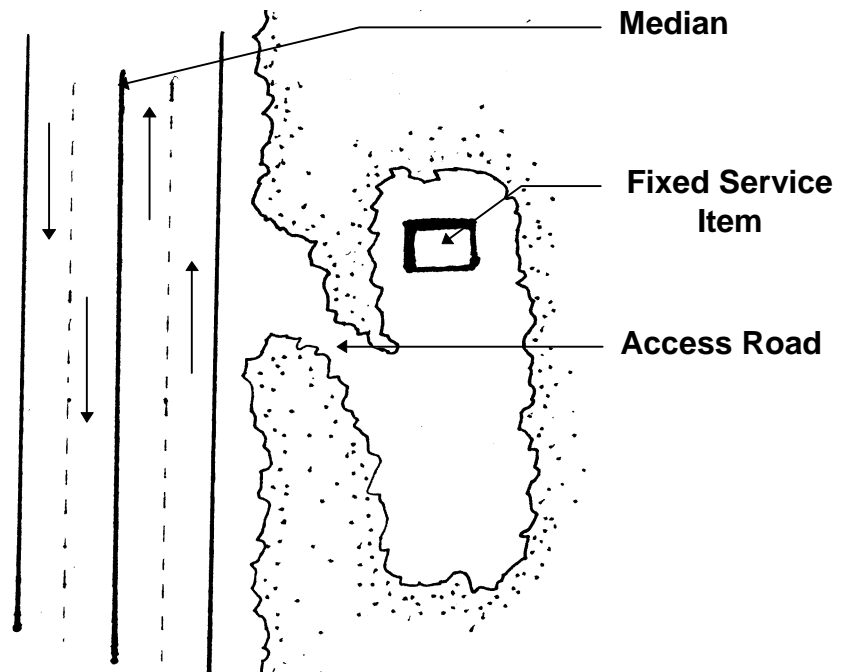


Figure 310.3 Possible maintenance access road configuration

- When long stretches of 800 meters or more of guardrail are used in areas with limited shoulder, provide a maintenance parking area adjacent to either end, where practical.

Security

To minimize security problems at pedestrian areas (trails, safety rest areas, and viewpoints), it is essential to provide clear visibility into the facility from adjacent areas, and within the facility itself.

Primary Considerations

- Locate buildings and other structures to provide the maximum practical visibility from other areas.
- At Safety Rest Areas, locate “Free Coffee” shelters to provide visibility to the largest area possible.
- Locate auxiliary structures (local information boards, panels, etc.) to allow maximum visibility of site.
- Where practical, install lighting and Emergency (911) cellular phone linkages to discourage vandalism, theft, and person-to-person crimes.
- The following are general recommendations for areas where security concerns regarding vegetation are present. These actions have been used successfully in a number of areas to alleviate security concerns while minimizing impacts on existing vegetation. These actions are only applicable to an existing security concern, and are not intended as a standard treatment for every roadside area!
 - Analyze the area to determine the security concern source and extent. Tailor all actions to preserve as much vegetation as possible while alleviating the security concern.
 - Complete removal of all vegetation (clearing) is not an acceptable method of alleviating every security concern.

Where vegetation is reducing desired visibility, consider the following actions:

- Limb branches of large evergreen trees (Western Red Cedar, Douglas fir, etc.) to an approximate 3 meter elevation. Since branches of these trees tend to droop down, prune off the ends of branches that hang lower than 2 meters.
- Prune smaller deciduous trees to encourage an open habit with leaves above a 2 meter elevation (Hazelnut, Serviceberry, Vine Maple, etc.). Remove only branches that are within the direct line of vision.
- Trim shrubs and groundcover to a 0.6 meter height and do not allow to grow higher than one meter high before pruning again (Salal, Snowberry, Nootka Rose, etc.).
- Limit the use of shrubs in areas directly adjacent to paths, parking areas, and remote picnic sites.

Consult with the regional Landscape Architecture Office or OSC Horticulturist for site and species specific pruning methods.

General

It is essential that the driver of a vehicle be able to gather information in time to make careful decisions. Roadside signs and adjacent vegetation must be designed, located and maintained to facilitate safe driving. WSDOT does not remove or trim vegetation to increase visibility of signs that are physically located outside of the right of way.

Signs both on and off the right of way are strictly regulated by an array of statutes and regulations to assure that motorists receive proper warning, guidance, and services information while maintaining the integrity of the roadside environment.

References

Design Manual, M 22-01, WSDOT

Traffic Manual, M 51-02, WSDOT

Advertising Along Washington Highways, WSDOT

Highway Advertising Control: Motorist Information Signs, M 55-94, WSDOT

Highway Advertising Control: Scenic Vistas Act of 1971, M 55-95, WSDOT

Roadside Classification Plan, WSDOT

Scenic Byway Logo Signing Guidelines, M 3001.00, WSDOT

Resources

- Design Office
- The region's and Olympia Service Center (OSC) Traffic Offices
- Regional and Service Center Real Estate Services Offices
- Heritage Corridors Program Office
- Maintenance Offices

Primary Considerations

- Consult signing specialists and outdoor advertising representatives in the region's and OSC traffic offices about signing related procedures and issues.
- Establishing access control can affect legally permitted outdoor advertising signs located on adjacent private property. The region's and OSC Real Estate Services offices are responsible for compensation procedures.
- Integrate sign locations with existing and proposed conditions.
 - Consider existing vegetation when placing signs.
 - Coordinate sign location with the region's Traffic Engineer.
- Coordinate new plantings with the region's Landscape Architect.

To decide whether a sign is needed, given a certain set of roadway and traffic conditions, the engineer must rely on judgment and consistent criteria that is based on:

- An understanding of the road user's information needs and how road users acquire information.
- A vision of traffic control, wherein individual traffic signs are viewed as part of a larger system of signs, signals and markings that provide clear and timely information to the road user.
- Accepted procedures and devices resulting from traffic control engineering studies.

General

Environmental functions include water quality preservation, protection and improvement; stormwater detention and retention; wetland and sensitive area protection; noxious weed control; noise control; habitat protection; habitat connectivity; air quality improvement; and erosion control.

Environmental functions are inseparable from operational, visual and auxiliary functions. For example, a central median can provide visual screening from oncoming traffic, reduce headlight glare to improve safety, provide habitat for certain wildlife, and provide a location for stormwater collection.

In addition to WSDOT personnel, the following table shows local, state, federal, and tribal agencies and their areas of interest. Many of these agencies might be involved in any one environmental project. Because of the complexity of laws, regulations, and environmental impacts, consult the region's Environmental Office or the Olympia Service Center (OSC) Environmental Affairs Office for any project with an environmental component. They will coordinate with the appropriate agencies.

AGENCY	PRIMARY AREA OF INTEREST
U. S. Army Corps of Engineers	Wetlands, streams, and navigable rivers. “Waters of the U. S.”
U. S. Environmental Protection Agency (EPA)	Wetlands, hazardous wastes, sole source aquifers, water quality, etc.
U. S. Fish and Wildlife Service (USFWS)	Wetlands, threatened and endangered species, migratory birds, Refuges, etc.
U. S. Forest Service (USFS)	Roadway and pit site easements, fish passage through roadway structures, recreational access along State Routes within Forest Service boundaries.
Natural Resource Conservation Service (NRCS) (Formerly the SCS)	Wetlands, farm land, erosion control, etc.
National Marine Fisheries Service (NMFS)	Threatened and endangered marine species (including salmon)
Washington State Department of Ecology	Water quality certification, shorelines, wetlands, permits for aquatic weed management, and National Pollutant Discharge Elimination System (NPDES) permits
Washington State Department of Natural Resources	Pit Site Reclamation Plans, Forest Practices Act, Surface Mining Permits. shoreline management.
Washington State Department of Agriculture	Pesticide licensing, permits for aquatic weed management
Office of Archaeology and Historic Preservation	Archaeological, cultural, and historic resources
Washington State Department of Fish and Wildlife (WDFW)	Priority species, threatened and endangered species, Hydraulic Project Approvals, wetlands associated with surface waters
Indian Tribes	Fish, fish habitat, and archaeological and cultural sites
Local Jurisdictions (cities and counties)	Wetland, streams, wildlife, shoreline, critical area ordinances, and grading permits

Table 400.1 Agency Involvement

Designated & Sensitive Areas

General

Some areas have been given special designation by local, state or federal agencies and require special consideration because of either environmental or political considerations. Sensitive areas (also called critical areas) such as sites with endangered plant and animal species, and designated lands such as local historic sites, state forests, or national parks, require special consideration during construction and maintenance activities. Of particular concern are activities that would alter the nature of the sensitive area or designated land, such as disturbance of native vegetation, the addition of stormwater to a stream or wetland, vegetation removal on a steep slope, or fill placed in a wetland or on a floodplain. These types of activities can be subject to special regulations.

Wetlands, streams, and wildlife habitat are sensitive areas. They will be covered in later chapters in this division.

References

Environmental Procedures Manual, M 31-11, WSDOT

Washington State Growth Management Act, which designates local jurisdiction critical or sensitive areas ordinances

Resources

The region's Environmental Office

OSC Environmental Affairs Office

Statewide Erosion Control Coordinator

Definitions

critical area See *sensitive area*.

critical habitat (A) Specific areas within the geographical area occupied by the species, at the time it is listed, on which are found those physical or biological features both essential to the conservation of the species, and which may require special management considerations or protection. (B) Specific areas outside the geographical area occupied by the species, at the time it is listed, that the U. S. Secretary of the Interior or the U. S.

Secretary of Commerce determines are essential for the conservation of the species.¹

designated lands Lands that have been officially recognized or identified for their special functions. Many of these are managed for environmental functions as well as other uses, such as recreation. These can include:

- National Wildlife Refuges.
- National Forests.
- National Parks.
- State, county, and local jurisdiction parks.
- Wild and Scenic Rivers
- Scenic and Recreational Highways
- Designated critical habitat for threatened or endangered species such as spotted owls.
- Priority habitat areas such as oak woodlands, agricultural lands, and sensitive plant habitat.

endangered species Any species of plant or animal that is in danger of extinction throughout all or a significant portion of its range.²

Environmental Resource Area Areas that have been identified in the field by a biologist as having high environmental resource value. Environmental Resource Areas may include (but are not limited to): stream corridors; oak woodlands, or other high quality habitat areas designated as locally or regionally important; known habitats for state or federal endangered, threatened, or priority species; and rare or sensitive plant communities.

sensitive areas (also called critical areas) Places in the landscape that are subject to natural hazards or that support unique, fragile, or valuable natural resources. In many cases, these areas have been designated as sensitive by local jurisdictions under the state Growth Management Act (GMA) and thus may have special regulations attached to them. Each jurisdiction has its own definition of what constitutes a sensitive area and has its own set of regulations that address the restrictions associated with these areas.

These areas can be highly susceptible to disturbance. Examples of sensitive areas include:

- Streams.

¹ Endangered Species Act (ESA), 1973

² ESA, 1973

- Wetlands.
- Steep slopes.
- Erosion hazard areas.
- Coal mine hazard areas.
- Landslide hazard areas.
- Seismic hazard areas.
- Floodplains, and smaller watersheds feeding into shellfish harvest areas.

threatened species Any species of plant or animal that is likely to become an endangered species within the foreseeable future throughout all or a significant portion of its range.³

Planning

Identification of Resources

Identify all sensitive areas and designated lands during the project planning phase. The following sources can be used to identify these areas:

- Local jurisdiction's sensitive area inventories, maps, and regulations: These sources define what the jurisdiction considers to be a sensitive area, indicate where all the inventoried sensitive areas are, and identify the regulations relating to the management and development of these areas.
- **National Wetland Inventory Maps:** These maps provide the approximate location of large wetlands.
- **Soil surveys:** These surveys are normally available for each county. They identify soil types, including soils highly susceptible to erosion and those on steep slopes. The surveys are available from the Natural Resource Conservation Service (NRCS).
- **Washington State Department of Natural Resources (DNR) stream typing maps:** These maps indicate stream location and type.
- **U. S. Geological Survey (USGS) quadrangle maps:** These maps help to identify steep slopes, streams, floodplains and some wetland areas.

³ ESA, 1973

- **Federal Emergency Management Agency (FEMA) maps:** These maps identify hazard zones within the 100- and 500-year flood boundaries.
- **DNR Natural Heritage Program:** This program provides the location of sensitive plant areas and high quality native plant communities.
- **Washington State Department of Fish and Wildlife (WDFW).** Priority Habitat and Species office will provide information on the location of priority species and habitats.
- **U. S. Fish and Wildlife Service (USFWS) and National Marine Fisheries Service (NMFS)** Threatened and Endangered Species Section will provide information on the approximate location of federally listed plant and animal species and critical habitat.
- **Site visit by EAO or the region's Biologist:** Such visits are usually required to identify uninventoried wetlands, streams, habitat areas etc.. Some threatened and endangered plant species can only be identified at certain stages of growth so the sensitive plant survey must be conducted during specific times of the year.

Design

Different designated and sensitive areas have many different management and design considerations. Management requirements for these areas can affect project design. Work closely with the environmental staff to coordinate activities. During the design phase, identify and consider the sensitive areas and designated lands. Where appropriate, locate sensitive areas and include them on plans and diagrams for the project.

Identify the regulations pertaining to each sensitive area in the design phase. For example, regulations might require mitigation and/or the establishment of buffers, or timing restrictions for certain construction activities such as pile driving. Consult the *Environmental Procedures Manual*.

Minimize Impacts

Minimize impacts to sensitive areas during design. Examples of measures to avoid impacts to adjacent areas include:

- Asymmetrical widening to avoid wetlands, critical slopes, active slide areas, or the locations of endangered plant species.
- Alignment or profile shifts.
- Design deviations.

- Installing guardrails to avoid slope flattening that will encroach upon sensitive areas.
- Building retaining walls to minimize the fill footprint.
- Minimizing clearing limits to avoid impacting buffers.

Construction

Primary Considerations

- Emphasize sensitive areas during precontract meetings. Note the kinds of activities that are not allowed in the sensitive areas and designated lands (such as clearing, grading, stockpiling materials, construction equipment, vehicle parking, etc.). This will help to minimize confusion and also help contractors and construction personnel avoid the sensitive areas.
- Install construction fencing or flagging to protect sensitive areas from encroachment by construction activities, if appropriate.
- Erosion control can be a significant issue in sensitive areas. See Division 7.

Timing Restrictions

Timing restrictions due to the presence of threatened and endangered species relate to the sensitive portions of their life cycle. Sensitive times include winter periods, migratory periods, and breeding seasons. Adjustments might be possible depending on site specific use.

Maintenance

Coordinate maintenance activities within sensitive areas and designated lands to minimize disturbances.

- Place roadside clearing debris only in designated disposal or holding areas.
- Do not clear vegetation in sensitive areas or their buffers without direction from the region's Environmental Office. Some designated lands might require similar treatment.
- Avoid removal of vegetation on steep slopes to maintain their stability and minimize erosion. Consult the region's Environmental Office or the Landscape Architecture Office if such slopes are present.

Special Considerations

- Avoid the use of herbicides except to control invasive, exotic, or noxious weeds.
- Herbicide use over water requires an additional permit and licensing.
- Avoid spraying herbicides in or adjacent to ditches that drain into wetlands and/or streams, as well as in, or adjacent to, sensitive plant habitats.
- Avoid mowing during the upland bird and migratory fowl nesting season in accordance with our memorandum of understanding (MOU) with WDFW for eastern Washington.
- Promote desirable native vegetation.

Resolving Conflicting Needs

Certain conflicts might arise during construction and maintenance of roadsides. Some of the more common are listed below.

- Environmental impacts might be unavoidable when safety or practical construction and operations would be compromised. Evaluate impacts on a case by case basis to integrate project design with overall environmental, safety, and maintenance considerations.
- Vegetation removal restrictions might occur in sensitive areas and their buffers. These restrictions can sometimes be mitigated by replacing the removed materials with acceptable alternate materials. See the region's Biologist or Landscape Architect, or the OSC Horticulturist for desirable replacement plant species.
- Mitigation might be required for loss of, or direct impacts to a sensitive area or designated land. Mitigation for these impacts will vary with the sensitive area. For example, in a seismic hazard area, engineering designs ensuring that a proposed bridge will withstand an earthquake might be sufficient for mitigating the impacts. In a flood hazard area, building outside the floodplain or creating additional flood storage might be used to mitigate construction impacts. The direct loss of a sensitive habitat area for plants or animals will usually require compensatory mitigation.

Coordination of sensitive area regulations and other environmental regulations can be completed by the region's Environmental Office or the OSC Environmental Affairs Office.

General

Wetlands are highly protected by law. Federal, state and local laws, and departmental policies require the Washington State Department of Transportation (WSDOT) to operate with “no net loss” of wetland function or acreage.

Special care must be taken in all steps of roadside management to ensure appropriate stewardship of wetlands and their associated buffers. Identification of wetland boundaries, categories and types, assessment of functions, and evaluation of impacts requires the expertise of a trained professional. Contact the region’s Environmental Office promptly for assistance. Water quality issues are addressed in the water quality chapter of this manual.

Any addition of fill material, or disturbance of existing soil in areas where water moves through or over the soil, has the potential to either disturb existing wetlands or create new wetlands. See the *Hydraulics Manual* and the *Highway Runoff Manual* for more information.

References

Construction Manual, M 41-01, WSDOT

Design Manual, M 22-02, WSDOT

Environmental Procedures Manual, M 31-11, WSDOT

Highway Runoff Manual, M 31-16, WSDOT

Hydraulics Manual, M 23-03, WSDOT

Policy Catalog, “Transportation Wetland Conservation Policy,” WSDOT.

<http://www.wsdot.wa.gov/commission/documents/default.htm> (p.78)

http://www.fhwa.dot.gov/environment/env_sum.htm #A

Wetland Mitigation Sites Monitoring Report, WSDOT

Wetlands Delineation Manual, U. S. Army Corps of Engineers, 1987.
<http://www.wes.army.mil/el/wetlands/wlpubs.html>

Cowardin, L. M., V. Carter, F. C. Golet, and E. T. LaRoe. 1979.
Classification of Wetlands and Deepwater Habitats of the United States. Office of Biological Services, Fish and Wildlife Service, U. S. Department of the Interior, Washington, D. C.

Resources

Wetland training is available to anyone within the department who might encounter wetlands in the course of their work. Contact your training coordinator.

For wetlands identification and delineation, impact analysis, mitigation, conceptual design, and monitoring, call the region's Environmental Office or EAO.

For final site plan development, construction observation and inspection, and plant establishment, call the region's (or OSC) Landscape Architect, or Environmental Office.

Definitions

compensatory mitigation The attempt to compensate for wetlands impacts. It usually involves the creation, preservation, restoration, or enhancement of a wetland to replace functions lost due to unavoidable impacts.

constructed wetlands Areas “created or restored specifically to treat either point or nonpoint source pollution wastewater.”¹ Although a constructed wetland might look the same as a created wetland, different regulations apply. Design and maintenance of constructed wetlands is determined according to their stormwater and hydraulic functions. Vegetation is used to maximize the desired functions.

created wetlands Those wetlands that have been constructed on a nonwetland site specifically to compensate for wetland losses permitted under Section 404 of the [Clean Water Act](#).² Created wetlands can also be created to compensate for impacts under local permits or WSDOT directive. Wetlands can also be accidentally created as a result of construction activities.

delineated wetland A wetland whose boundary has been identified by a qualified biologist using a standard delineation methodology evaluating soils, vegetation, and hydrology. A right of entry might be required to formally delineate a wetland for project purposes if it does not occur entirely on WSDOT right of way. The delineated boundary is flagged in the field and surveyed. The biology report will include the delineation survey with flag locations and numbering.

ditches Narrow depressions designed to collect, convey, and discharge stormwater runoff from roadway surfaces, adjacent right of way, and groundwater discharge from adjacent slopes. Many ditches are diverted streams and creeks. Because of this hydraulic function, it

¹ TRB, 1996

² TRB, 1996

is not uncommon to see wetland (hydrophytic) vegetation growing in roadside ditches.

exotic species A species found in but not native to a particular area.

groundwater Water that occurs below the surface of the earth, which is contained in pore spaces. It is either passing through or standing in the soil and underlying strata and is free to move under the influence of gravity.³

habitat The environment occupied by individuals of a particular species, population, or community.⁴

hydrology The science that relates to the occurrence, properties, and movement of water on the earth. It includes water found in the oceans, lakes, wetlands, streams, and rivers, as well as in upland areas, above and below ground, and in the atmosphere.⁵

impact An action that adversely affects a wetland or other ecosystem; for example, road construction, timber clearing, or agricultural activities that result in wetland conversion or degradation.⁶

indicator One of the specific environmental attributes measured or quantified through field sampling, remote sensing, or compilation of existing data from maps or land use reports, used to assess ecosystem condition or functions or exposure to environmental stress agents.⁷

invasive vegetation Those (typically) nonnative plant species that will often outcompete native plant communities.

jurisdictional wetlands All naturally occurring wetlands, some wetlands unintentionally created as the result of construction activities, and those created specifically for the compensation of wetland losses. These wetlands are regulated by the Army Corps of Engineers and local jurisdictions. (Ditches created in non-wetland areas that support wetland vegetation are not considered jurisdictional wetlands.) Check with the Environmental Office for site specific clarification.

monitoring The collection of information after construction to assess if the replacement project is successful and to keep the regulatory agencies and construction agency informed about the status of the replacement project.⁸

³ TRB, 1996

⁴ TRB, 1996

⁵ TRB, 1996

⁶ TRB, 1996

⁷ TRB, 1996

⁸ TRB, 1996

natural wetlands Those wetlands in existence due to natural forces alone, or unintentionally developed through construction or management practices which alter hydrology. Natural wetlands can be found in unusual areas, including filled areas, some ditches, inactive borrow pits, ponds, and agricultural fields. Natural wetlands are protected by federal, state, and local regulations as well as WSDOT's internal policies. (See Division 2.)

nonjurisdictional wetlands Nonjurisdictional wetlands include those artificial wetlands intentionally created from nonwetland sites, including, but not limited to, irrigation and drainage ditches, canals excavated in uplands, stormwater detention ponds, wastewater treatment facilities created in uplands, and certain agricultural activities and landscape amenities created in uplands. Grass-lined swales and wastewater treatment facilities can be constructed in wetlands but must be so designated and specifically designed for water treatment purposes. Mitigation will be required to compensate for the wetland lost to such a facility

The Shoreline Management Act and Growth Management Act include as nonjurisdictional those wetlands created after July 1, 1990, that were unintentionally created as a result of the construction of a road, street, or highway. WSDOT has a “no net loss” policy regarding wetlands and will mitigate impacts to wetlands created after that date.

pollutant An element that enters a biological pathway or becomes concentrated to the extent that it might cause injury to living organisms or the functioning of environmental systems.

restoration Ecological restoration is the process of assisting the recovery and management of ecological integrity. Ecological integrity includes a critical range of variability in biodiversity, ecological processes and structures, regional and historical context, and sustainable cultural practices.⁹

soil erosion The part of the overall process of denudation that includes the physical breakdown, chemical dissolving, and transportation of material by agents such as water, wind, ice, and gravity.¹⁰

wetland Wetlands are defined under the Clean Water Act as “those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally

⁹ <http://nabalufilas.ufl.edu/ser/definitions.html>

¹⁰ TRB, 1996

include swamps, marshes, bogs, and similar areas.” Areas do not need to have surface water throughout the year to qualify as wetlands.¹¹

wetland banking A form of compensatory mitigation where, typically, a large mitigation site is developed using creation and/or restoration. This is developed in advance of project wetland impacts. Credit is withdrawn from the bank to compensate for unavoidable wetland impacts. This is generally accomplished through a written agreement signed by regulatory agencies governing the use of the bank.

wetland buffer The area adjacent to a wetland that serves to protect the wetland from outside influences. Wetland buffers also contribute to the integral functions of the wetland. Regulated buffer widths vary depending upon the quality of the wetland and guidelines established by the local jurisdiction under the state Growth Management Act. Required buffer widths will be identified in the project’s wetland/biology report. Wetland buffers must be shown on contract plans sheets. No work may occur within an identified wetland buffer area unless it has been approved by the appropriate permitting agency.

wetland functions The physical, chemical, and biological processes that can be attributed to a wetland ecosystem. Wetland functions are generally grouped into three categories: (1) *habitat* (providing the factors and conditions necessary to support wetland-dependent species); (2) *water quality* (improving the quality of downstream surface and groundwaters through the uptake of contaminants, sediment retention, nutrient retention, supply, and so forth); (3) *hydrology* (moderating surface and groundwater flows, including flood attenuation, maintenance of base flow, and so forth).¹²

Planning

Identification & Assessment

Conduct a preliminary inventory in the vicinity of a project to identify the presence of wetlands as early as possible in the planning stage. This includes areas possibly impacted by the project. Identify jurisdictional and nonjurisdictional wetlands.

General information collected includes the wetland *class* according to dominant vegetation type (such as forested, scrub-shrub, or emergent)

¹¹ Clean Water Act, 1972

¹² Transportation Research Board. *Report 370: Guidelines for the Development of Wetland Replacement Areas*. Washington, D.C.: National Academy Press, 1996. pp 71-8.

and water source. This is outlined in a national wetland classification system.¹³

To indicate their quality or rarity, wetlands are rated into *categories* (sometimes called classes): I, II, III, IV, with Category I being the highest quality. The higher the category the more important impact avoidance becomes and more extensive mitigation will be required. For more information see the *Environmental Procedures Manual*. A biologist identifies and rates wetlands. Ratings assist in determining appropriate buffers for the wetland and define replacement ratios for compensatory mitigation.

The rating includes:

- Size.
- Determination of rough boundaries.
- Class of wetland (forested, scrub-shrub or emergent).
- Diversity of plant communities.
- Habitat features.
- Connection to streams or other wetlands.
- Presence of threatened and endangered species.
- Quality of existing buffers or surroundings.

WSDOT policy is to delineate as a jurisdictional wetland (those wetlands regulated by the Corps of Engineers) all ditches that were constructed in a wetland, or in an area that once was a wetland.

In a farmed wetland, or agricultural field, under Natural Resource Conservation Service (NRCS) jurisdiction, the presence of wetland vegetation is not required.

Should any unintentionally created nonjurisdictional ditches occur within a project's limits, identify them by type, location, and predominant features rather than by delineating and surveying them. Present this information in the Wetland/Biology Report.

Wetland Indicators

Wetlands must be considered in all phases of roadside management. An indication of any one of the three wetland parameters (wetland hydrology, wetland soils, or wetland vegetation) is considered a "Red Flag". Consider the presence of these as possible wetland indicators, and do not discount the potential for wetland presence until investigated by a trained wetland biologist. Contact your region's

¹³ Cowardin et al. 1979

Environmental Office or the OSC Environmental Affairs Office for further investigation.

The following is a partial list of indicators of potential wetland areas. Sites having any of these indicators must be examined further by a biologist prior to beginning work:

Wetland Hydrology

- Areas that have standing water at any time of the year
- Topographical low areas
- Areas near streams, lakes, or other shorelines
- Areas with water seeping out of a hillside
- Ditches that hold water long after rain events
- Ditches that flow to other water bodies such as streams, lakes, ponds, and the like.

Wetland Soils

- Areas where vehicles get stuck or leave ruts.
- Areas with dark, sticky soils.
- “Unsuitable soils” for construction or foundation.
- Highly organic soils.
- Clay soils that are pale gray or mottled.
- Sites within flood plains.
- Soils that give off a rotten egg smell when disturbed.

Wetland Vegetation

- Obvious wetland plants such as skunk cabbage, cattails, or spike rush.
- Trees such as alders, willows or western red cedars dominating low-lying areas.
- Shrub thickets in low-lying areas.

Design

Project Definition

Roadside wetland management involves created, constructed, and natural wetlands. Cost-effective wetland management includes:

- Thorough site analysis as early as possible in the project definition process, including an inventory of all wetlands.
- Early involvement of all partners in roadside management, including representation from environmental affairs, planning, design, construction, maintenance, and, if necessary, regulating agencies.

Impacts

Impact analyses are found initially in the Biology/Wetland Report, and later in more detail in the mitigation plan developed by the biologist. It addresses such factors as:

- Type of impact; permanent or temporary.
- Size of impact.
- Size of impact in relation to size of entire wetland.
- Assessment of impacts to functions provided by the wetland.
- Cumulative impacts from the entire project.

Functions provided by the wetland include flood attenuation, fish & wildlife habitat, water quality enhancement, groundwater recharge, erosion control and shoreline stabilization.

Uniqueness or geographic location might contribute to the wetland's importance.

Wetland Mitigation

The department's wetland policy requires that every project or activity must avoid wetland impacts to the greatest extent possible and then minimize any unavoidable impacts. Wetland impacts might be unavoidable when safety or practical construction and operation would be compromised. Evaluate impacts on a case by case basis to integrate project design with overall environmental, safety, and maintenance considerations.

Whenever a wetland will be impacted by project construction or any other roadside management activity, compensatory mitigation is required. Mitigation can be mandated by federal, state, regional, local laws, and/or departmental policies. Mitigation proceeds as follows:

- 1) Avoid the impact altogether
- 2) Minimize the impact
- 3) Reduce the impact over time
- 4) Rectify after impact

5) Compensate for the impact with mitigation

Compensatory mitigation usually involves the creation, restoration, or preservation and enhancement of a wetland to replace functions lost due to the unavoidable impact. The primary goal is to compensate for direct wetland losses and temporal impacts. Additional goals for mitigation are:

- No overall net loss of wetlands, as defined by acreage and function.
- Restoration and/or creation of wetlands where feasible.
- Increased quality and quantity of the wetlands base.

Measures to Minimize Impacts

Use all practicable measures to reduce and minimize wetland impacts. These include:

- Asymmetrical widening to avoid critical slopes, active slide areas, and wetlands.
- Alignment or profile shifts.
- Design deviations.
- Installing guardrails to avoid slope flattening that will encroach upon sensitive areas.
- Building retaining walls to minimize the fill footprint.
- Minimizing clearing limits to avoid impacting buffers.

Design of Wetland Mitigation Sites

The design phase of a wetland mitigation project includes:

- Inventory of any wetlands not identified in the planning stages
- Delineation
- Avoidance and minimization of impacts
- Selection of a mitigation site
- Impact assessment
- Development of mitigation ratios (replacement ratios)
- Permit negotiations with resource agencies
- Conceptual compensatory mitigation design
- Development of the final wetland mitigation plan
- Contract preparation

Site selection is probably the most important factor in the success of a mitigation site. Refer to the Appendix for an example of a site evaluation worksheet.

When considering location of wetland mitigation, consider long-term viability of the wetland. While mitigation can be done adjacent to the roadway this is often not the best location for long term operation and maintenance of the road, or for the ecological value of the wetland. Strongly consider mitigation sites that are not adjacent to the roadway. Partnering with other organizations and mitigation banking can help make this a practical alternative.

Primary Considerations:

- Include a biologist, a hydraulic engineer, and a landscape architect in the mitigation design team.
- Coordinate with the Area Maintenance Office.
- Knowledge gained from past projects might be relevant to the project. An annual monitoring report is available for reference. Consult with the Environmental Office Monitoring Program (OSC) to discuss results of monitoring past wetland mitigation sites.

Design criteria are driven by the type of wetland being replaced, targeted functions, and site conditions.

The following steps will improve coordination between design and maintenance of created wetlands:

- Minimize the overlap between wetland buffers and the Design Clear Zone when wetlands are constructed adjacent to the roadway.
- Field verify the wetland location with the area maintenance supervisor.
- Provide a fence boundary with wildlife fence.
- Identify compensatory mitigation wetlands in all plans, including Right of Way Plans and Roadside Management Plans.

Construction of Mitigation Wetlands

Activities during construction include verifying appropriate hydrology, contour grading and other earthwork, erosion control, plant material inspection, possible soil amendment, and planting.

Primary Considerations:

- Erosion prevention is especially critical in wetlands, and adjacent to existing wetlands, streams and shorelines. Monitor erosion prevention measures to ensure continuous functioning during construction and until plants are established. See Division 7 for more information on erosion control methods. The stormwater site plan and/or the Temporary Erosion and Sediment Control Plan (TESC Plan) address necessary measures for erosion control.
- Minimize soil compaction by minimizing the amount of time equipment is on site and by working during a period in which the water table is at its lowest level, or by scarifying the area after coarse grading is complete.
- Grading activities: prior to final grading, designers check site conditions. Refer all questions or changes to the landscape architect or biologist on the team.
- Protect adjacent desirable vegetation using construction fencing.
- Consult with the landscape architect on weed control, soil amendments, plant material inspection, and planting techniques.
- Flag existing wetlands that are not to be disturbed by using construction fencing to keep construction equipment out of them.
- Refer to the [*Construction Manual*](#) for more information on construction practices.
- For mitigation wetlands that require formal monitoring, specify monitoring wells to be installed as part of the construction contract. Consult with Hydraulics to determine the best locations for these monitoring wells. Survey in the well locations and note on plans. Consult with environmental staff for the type of well needed.
- Consider installing wetland boundary signs. They are available from the region's Environmental office or the OSC Environmental Affairs Office.

Monitoring

Monitoring compensatory wetland mitigation sites provides a systematic means of tracking the development of the site over time, shows compliance with the terms of the permits, and provides feedback for future wetland mitigation planning and design. Although not all sites require formal monitoring, all sites are monitored on at least an informal basis.

Depending on permit requirements, some sites may be monitored for five years or more to ensure they have met the standards of success established in the permit. This inspection may include evaluation of:

- Delineation (to verify that wetland criteria has been met and that acreage meets or exceeds permit requirements)
- Hydrology
- Soils
- Vegetation survival
- Plant species diversity
- Percentage of vegetative cover
- Water quality
- Wildlife use
- Bird species diversity
- Identification of disturbances and problems

The extent of items monitored depends on the permit requirements. Observations are recorded along with recommendations for remediation requirements to fulfill the terms of the permit.

Primary Considerations:

- The OSC Monitoring Program assumes the lead in wetland monitoring for permit compliance and to gather information for use in future wetland mitigation planning and design.

For sites that do not require permits, monitoring may be done by the region's Biologist.
- Periodic monitoring reports are required to be submitted to the regulating agencies. Current practice is to submit an annual report, but ultimately the frequency is determined by the permit.
- The Monitoring Program advises regions and other offices as to whether Standards of Success have been met. The Standards of Success are determined based on the original permit for any particular wetland and are determined in conjunction with the permitting agency.
- If Standards of Success are not met, the region's environmental staff, biologists, and landscape architects will coordinate remedial action with permitting agencies. This might require coordination with other disciplines.

Maintenance

Wetland Mitigation Sites

Compensatory mitigation sites are usually retained by WSDOT and maintained according to a management plan, or as needed, based on the monitoring report.

Except for the plant establishment period and trash pickup, no maintenance activities take place in created wetlands unless otherwise stated in the management plan, the contingency plan for the wetland, or the wetland monitoring report. In most cases this restriction on maintenance activities also applies to the designed upland buffer around the wetland.

Long-term maintenance required in the management plan may include:

- Repairing damage to the site from vandalism, storms, or fire.
- Control of exotic and invasive weed species.
- Eradication of state-listed noxious weeds.
- Plant replacement, if necessary, to meet permitting requirements.
- Selective removal of some types of trees to facilitate the natural succession of desirable plant communities. This decision is made in conjunction with the Biologist and Landscape Architect.
- Other activities required to maintain a functioning wetland as determined by the region's Environmental Office or the OSC Environmental Affairs Office.

Primary Considerations

- Establish a feedback loop for typical maintenance problems that might arise specific to the selected site. Include the region's Environmental Office, OSC Monitoring, the design Biologist, and the Landscape Architect in that loop.
- Wetland vegetation is not to be sprayed, mowed, or cleared except when necessary to maintain designated roadside ditches or detention ponds. Designate herbicide restrictions near wetlands.
- In wetland mitigation sites, some vegetation management may be performed in accordance with management or contingency plans for the site.
- Application of herbicides in wetland mitigation sites requires an aquatic certification on the applicator's license. One must pass both the aquatic and pesticide tests to use pesticides in wetlands. The appropriate permit is obtained from the Department of

Ecology. See the OSC Roadside Maintenance Office for more details and assistance in obtaining the permit.

- Develop a long-term maintenance plan with the cooperation of the Maintenance division, EAO Biology, EAO Monitoring, and the Landscape Architects.

Ditches

Operational activities may be allowed for maintenance of roadside ditches, upon notification of the region's environmental office and obtaining permits, if necessary. Permit requirements depend upon several factors, including how wide the ditch is, the type of soil the ditch is in, connections with other wetlands or streams, and fish use of ditches during all or part of the year.

Identify all roadside ditches in plans, including Right of Way Plans and Roadside Management Plans.

Contact the region's EAO if there is any present or historical evidence of wetlands related to roadside ditches.

Additional Sources of Information

National Research Council. *Restoration of Aquatic Ecosystems*. Washington, D.C.: National Academy Press. 1992

Restoring Wetlands in Washington, 93-17, Washington State Department of Ecology, 1993.

Transportation Research Board. *Guidelines for the Development of Wetland Replacement Areas*, NCHRP Report 379. Washington, D.C.. National Academy Press, 1996.

General

Roadways can have an impact on the quality of the region's water resources. An increase in the amount of impervious surface within a watershed contributes to higher volumes of stormwater runoff and increases peak flows. This raises the potential for soil erosion and the transportation of a variety of pollutants to receiving water bodies. With the increase in impervious surface area, precipitation is not able to infiltrate the soil and groundwater table, which reduces the amount of water available for aquifer recharge and baseflow throughout the year. Thus, the quantity and quality of stormwater runoff must be managed in order to effectively protect and maintain water quality.

A continuous vegetated cover can intercept precipitation and protect the soil from erosion. Mature vegetation can also take up and transpire large volumes of water. Once that vegetation is removed, water is no longer held in that system, and it moves quickly over the soil surface increasing the potential for erosion and possible flooding. Consider retaining as much mature vegetation as practical to protect water quality and decrease stormwater quantity.

Federal, state, local, and departmental policies require that runoff from state highway systems be managed to reduce the adverse impacts associated with stormwater pollution. The major components used to detain, treat, and convey highway runoff are located in the roadside environment.

References

[WAC 173-201A](#) –Water Quality Standards for Surface Waters of the State of Washington.

[WAC 173-204](#) – Sediment Management Standards.

Environmental Procedures Manual, M 31- 11, WSDOT

Highway Runoff Manual, M 31-16, WSDOT

Washington State Stormwater Management Plan, WSDOT, 1997

Resources

The region's Environmental Office

The region's Hydraulics Office

Environmental Affairs Office – Water Quality Program

Field Operations Service and Support Center (FOSSC) Environmental
Service Branch

NW Regional Water Quality Program

OSC Hydraulics Office

Definitions

Best Management Practices (BMPs) Physical, structural, and/or managerial practices that, when used singly or in combination, reduce the downstream quality and quantity impacts of stormwater.¹

biofiltration the cleaning of surface water using plants and other biological methods to extract or retain sediment and pollutants.

buffer The zone contiguous with a sensitive area that is required for the continued maintenance, function, and structural stability of the sensitive area. The critical functions of a riparian buffer (those associated with an aquatic system) include shading, input of organic debris and coarse sediments, uptake of nutrients, stabilization of banks, interception of fine sediments, overflow during high water events, protection from disturbance by humans and domestic animals, maintenance of wildlife habitat, and room for variation of aquatic system boundaries over time due to hydrologic or climatic effects. The critical functions of terrestrial buffers include protection of slope stability, attenuation of surface water flows from storm water runoff and precipitation, and erosion control.²

detention pond A type of drainage facility designed to hold surface and stormwater runoff for a short period of time and then release it over time via adjacent surface water bodies or aquifers.

impervious surface A hard surface area that either prevents or retards the entry of water into the soil. Common impervious surfaces include roof tops, walkways, driveways, parking lots, concrete or asphalt paved roadways, gravel roads, packed earthen materials, and oiled surfaces.

infiltration The downward movement of water from the surface to the subsoil.

retention pond A type of drainage facility designed to hold water for a considerable length of time allowing it to evaporate or infiltrate into the soil.

¹ *Highway Runoff Manual*, M 31-16. WSDOT, pp Glossary 1-2.

² *Ibid*

runoff That portion of the precipitation on a drainage area that is discharged as overland flow. Types include surface flow, groundwater flow, and seepage.

stormwater That portion of precipitation that does not naturally percolate into the ground or evaporate, but flows via overland flow, interflow, channels, or pipes into a defined surface water body or infiltration facility.

Stormwater Site Plan (SSP) A plan that shows the measures that will be taken during and after project construction to provide erosion, sediment, and stormwater control. Specific elements of the plan are outlined in the [Highway Runoff Manual](#).

swale A shallow drainage conveyance with relatively gentle side slopes, generally with flow depths less than one foot. May be designed for infiltration, biofiltration, or water conveyance.

Temporary Erosion and Sediment Control Plan (TESC) A plan required on any project involving earthwork. The specific elements are outlined in the [Highway Runoff Manual](#).

watershed An area of land surface defined by a topographic divide that collects precipitation into a stream or river. Sometimes referred to as a drainage basin.

The Highway Runoff Program

The Highway Runoff Program was developed in cooperation with the Department of Ecology and codified in Chapter 173-270 (Highway Runoff Rule) of the Washington Administrative Code. The Highway Runoff Program is implemented by the [Highway Runoff Manual](#).

The Highway Runoff Manual

The WSDOT [Highway Runoff Manual](#) contains approved methods of dealing with runoff from WSDOT facilities. These methods are known as Best Management Practices (BMPs). Examples of water quality BMPs found in the [Highway Runoff Manual](#) are:

- Biofiltration swale
- Vegetative filter strip
- Wet pond
- Nutrient control wet pond
- Wet vault/tank
- Water quality infiltration pond

National Pollutant Discharge Elimination System (NPDES) Permits

The discharge of stormwater by municipal and industrial sources is regulated by the NPDES permit program, authorized under the Federal Water Pollution Control Act (the [Clean Water Act](#)). The purpose of the NPDES program is to prohibit nonstormwater discharges into storm sewers, to reduce or eliminate discharge of stormwater-borne pollutants, and to manage stormwater. NPDES permits cover programmatic activities as well as project and site specific base line (industrial) activities.

NPDES General Construction Permits

Construction disturbing greater than 2 hectares (5 acres) on state highways and WSDOT facilities requires a project specific NPDES permit. The regional Environmental Coordinator obtains these permits through the Department of Ecology (Ecology). These permits authorize discharge of “managed” runoff from state highways for the duration of the project.

NPDES Municipal Stormwater Discharge Permits

Projects in areas covered by Municipal NPDES permits must apply to the local jurisdiction as well as obtain Ecology permits. Jurisdictions covered by Municipal NPDES permits include: King County, Snohomish County, Pierce County, Clark County, and Spokane County (This will broaden to include the entire state in 2002).

Planning

Planning includes a site analysis and impact assessment to determine the potential water quality impacts related to project development. It is important to note that the assessment of water quality conditions extends well beyond the highway right of way. The effect of on-site conditions (those changes occurring within the project boundaries or roadside zones) on the off-site receiving water bodies must be determined.

Utility agreements with municipalities might exist allowing them to discharge stormwater into our system, or vice versa, provided conditions specified in the utility agreement are upheld. Contact the regional Utilities Office for information on these agreements.

The offices shown in the following table might be involved during the planning phase to make a preliminary determination of impacts.

RESPONSIBILITY	TASK
Water Quality Program	<ul style="list-style-type: none"> Watershed Needs Assessments Water quality reports for Environmental Assessments or Environmental Impact Statements
Hydraulic Engineer or Project Engineer's Office	<ul style="list-style-type: none"> Preliminary hydraulics effects assessment
Surveying	<ul style="list-style-type: none"> Evaluation to determine needed surveys and monument preservation
Materials	<ul style="list-style-type: none"> Preliminary soils survey
Real Estate Services	<ul style="list-style-type: none"> Evaluation to determine needed acquisition, easements, or permits
Utilities	<ul style="list-style-type: none"> Research for existing stormwater discharge agreements Evaluation to determine needed relocations
Biologist	<ul style="list-style-type: none"> Preliminary biological impacts review
Environmental Coordinator	<ul style="list-style-type: none"> Evaluation to determine needed permits

Table 440.1 Area of Responsibility During Planning

Design

The configuration of the storm drainage system is determined in the design phase. Consult the [Highway Runoff Manual](#) and local regulations governing stormwater facilities. The [Highway Runoff Manual](#) requirements are used, unless local requirements are more stringent. If the project requires a NPDES permit for construction, specific permit conditions might require additional controls to manage runoff. Site characteristics that influence the design of the stormwater system include, but are not limited to, the following:

- Soil characteristics
- Water table elevation
- Proximity of the highway to natural water bodies and wetlands
- Area of available land
- Priorities listed in Regional Basin Plans
- Fish Resources
- Water Quality Sensitive Areas
- Outfall inventory and field screening results
- Slopes
- Amount of rainfall
- Groundwater protection concerns
- Area of existing and new highway surface to be treated
- Intensity of surrounding land use conditions (urban, rural, residential, and so forth)
- Average daily traffic count

Blend retention/detention ponds into the surrounding landscape. Consider ponds with shapes that are not rectangular.

A typical system is composed of catch basins located adjacent to the roadway, a detention/retention pond in the right of way, and a grass lined swale meandering through the right of way. From there the runoff might flow into a receiving water body. The catch basin, detention pond, and swale seen in Figure 440.1 are all examples of Best Management Practices (BMPs).

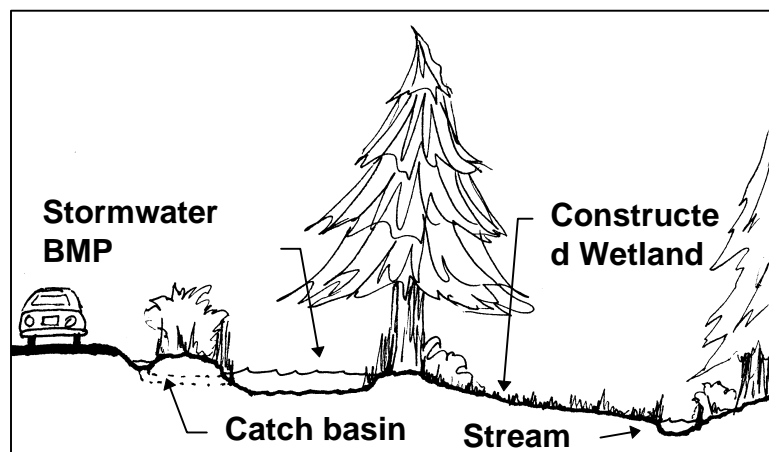


Figure 440.1 Typical Best Management Practices in the Roadside

Regional hydraulics staff serve as the primary contact for the design of the project's drainage system. Most projects lend themselves to easily installing one or more of these management practices. However, there are times when the site does not provide for easy installation of any of the BMPs or when the preferred BMPs identified in the Highway Runoff Manual are not well suited for the site. Contact the OSC or Regional Water Quality Program for additional assistance when these types of problems arise.

Offices most likely to be involved in design and their roles in water quality management are shown in the following table:

OFFICE	ROLE
Project Engineer's Office/Project Manager	<ul style="list-style-type: none"> • Design of stormwater system • Hydraulic Report • Stormwater Site Plan (SSP) • TESC plan • Site design in response to data and appropriate Best Management Practices.
Environmental Coordinator	<ul style="list-style-type: none"> • Permit compliance assistance • Permit Application and Public Notice Submittals
Surveying	<ul style="list-style-type: none"> • Research existing monuments • Do surveys as needed
Materials	<ul style="list-style-type: none"> • Complete Soils/Geotechnical Survey
Real Estate Services	<ul style="list-style-type: none"> • Obtain needed fee titles & easements
Utilities	<ul style="list-style-type: none"> • Pursue any needed utility relocations
Regional or OSC Water Quality Program	<ul style="list-style-type: none"> • SSP review and approval • PS&E plans review • Water quality assistance
OSC Hydraulics	<ul style="list-style-type: none"> • Concurrence on Type A report (structures over 1.22 m diameter)
Regional Hydraulics Office	<ul style="list-style-type: none"> • Hydraulic assistance • Type B report approval authority • PS&E review
Landscape Architect	<ul style="list-style-type: none"> • Site analysis, • Assist the Project or Hydraulics Engineer in grading to blend water quality facility into the landscape.
Biology	<ul style="list-style-type: none"> • Comment on specific plan elements • Biological Impact Assessment
Maintenance	<ul style="list-style-type: none"> • Analyze & comment on specific plan elements for impact on maintenance and future operations.

Table 440.2 Roles During the Design Phase

Construction

The primary concern with stormwater runoff during construction activities is erosion prevention and sediment control. Deposition of sediment in water bodies degrades water quality and severely impacts aquatic habitat. Refer to the Erosion Control chapter for information. The [Highway Runoff Manual](#) provides guidance to fulfill the requirements for temporary erosion and sediment control, as well as permanent control measures to manage stormwater after construction is complete.

OFFICE	ROLE
Construction Field Office	<ul style="list-style-type: none">• Implement Stormwater Site Plan• Implement Temporary Erosion and Sediment Control Plan and inspect frequently• Permit compliance
Environmental Coordinator	<ul style="list-style-type: none">• Permit compliance assistance
Regional or OSC Water Quality Office	<ul style="list-style-type: none">• Permit compliance assistance
Regional Hydraulics Office	<ul style="list-style-type: none">• Permit compliance assistance
Surveying	<ul style="list-style-type: none">• Protect existing monuments• Surveying as needed
Project Manager's Office	<ul style="list-style-type: none">• Ensure permit compliance
Landscape Architect	<ul style="list-style-type: none">• Advise and assist Project Manager with landscape construction inspection

Table 440.3 Roles During Construction

Consult the [Highway Runoff Manual](#) for detailed information on the Stormwater Site Plan and Temporary Erosion & Sediment Control Plan requirements. For technical assistance with the development of these plans, contact the regional Environmental staff, Hydraulics, or Water Quality Units.

Maintenance

Maintenance of stormwater control facilities such as detention ponds or swales usually includes:

- Weed control and noxious weed removal
- Periodic sediment removal and disposal
- Reestablishing grass after sediment removal

It is important that grass lined swales remain grass lined. It is the roughness of the vegetation that slows water movement and aids in removal of sediment and pollutants from the water.

Consult the guidance found within the [Highway Runoff Manual](#), the regional Environmental and Hydraulics staff, or the Area Maintenance Superintendent before performing activities (such as deepening ditches or plugging existing drainage structures) that alter the designed drainage pathways within the roadside area.

Resolving Conflicting Needs

Certain conflicts might arise during design, construction, and maintenance of the roadway. Some of the more common conflicts associated with water quality concerns are listed below.

Wetlands and Stormwater

Wetlands naturally provide water quality benefits. They can remove pollutants, attenuate flows, and recharge ground water. However, natural wetlands cannot be used as stormwater treatment facilities in place of treatment BMPs such as biofilters or a wet pond. All stormwater runoff must be treated before it is allowed to flow into a natural wetland or other water body. In addition, any plan to allow treated stormwater to flow into a natural wetland must be approved by the regional Biologist or Environmental Office in order to meet permitting agencies' standards and requirements.

Personnel working within the roadside environment must be aware of the fundamental differences in regulatory restrictions for natural wetlands and detention/retention ponds. While these ponds might look similar to some natural wetlands, a detention/retention pond is built specifically for receiving and/or treating runoff, and not regulated as a jurisdictional wetland.

Protective buffer zones serve to provide protection to natural and created wetlands.

The removal of material from wetlands or buffer zones is prohibited without appropriate permits.

Further information can be obtained by consulting the wetland section of this manual. Contact the regional Environmental staff or the OSC Biology Unit with questions concerning the presence of wetlands. Contact regional Hydraulics or the regional Water Quality Unit for further information on detention/retention ponds.

Maintenance Requirements

Permit Conditions

More than one permit from more than one agency might be required for work in streams or fish bearing waters. The most common restriction in those permits has to do with the timing of the work. Normally, these restrictions will require any work be done during low flow conditions to minimize impacts to fish and water quality.

The manager of the maintenance or construction project must be certain that all persons involved in the project are aware of permit terms and conditions. Regional environmental staff are available to answer project specific questions and are responsible for coordination with resource agencies. For general permit regulations help, contact the regional or OSC Environmental Office.

Mixing Zones

Mixing Zones are only for unavoidable work in water. When work is necessary in water, all water discharged from the site must meet the State's Water Quality Standards according to [WAC 173-201A](#). A mixing zone for turbidity is authorized during and immediately after necessary in-water or shoreline construction activities that result in the disturbance of in-place sediments.

- Use of a turbidity mixing zone is intended for brief periods of time (such as a few hours or days).
- It requires all local and state permits.
- Mixing zones cannot damage the ecosystem, adversely affect public health, or result in a loss of sensitive habitat.
- All appropriate Best Management Practices must be in place.

See the Regional Water Quality or OSC Water Quality Office or the regional Environmental Office for assistance.

Seasonal Restrictions For Construction Activity

Seasonal restrictions for erosion and sediment control practices apply to construction projects. The restrictions are identified in the [Highway Runoff Manual](#). Contact the regional Environmental Office, regional

Water Quality Unit, Hydraulics, or the OSC Water Quality Program for further information on [*Highway Runoff Manual*](#) erosion and sediment control guidance.

Additional Sources of Information:

Dunne, Thomas, and Luna B. Leopold. *Water in Environmental Planning*. New York: W.H. Freeman and Company. 1978.

Horner, Richard, et al. *Fundamentals of Urban Runoff Management: Technical and Institutional Issues*. Washington, DC: Terrene Institute. 1994.

Schueler, Tom. *Site Planning for Urban Stream Protection*. Washington, DC: The Center for Watershed Protection with assistance from US Environmental Protection Agency, Office of Wetlands, Oceans and Watersheds, 1995.

General

Roads can form a significant barrier to fish, small mammals, amphibians, and reptiles. Many species of wildlife have been impacted by development to the point where they have been listed as threatened or endangered. Other species that are more adaptable to urban environments have expanded their ranges and their populations. For example, some species such as red-tailed hawks have adapted very successfully to the altered habitats available on the roadside rights of way.

Wildlife requires special consideration during the planning, design, construction, and maintenance phases of highways. Of particular concern are:

- Locations of roads in relation to wildlife migration corridors and critical habitat areas.
- Noise generating activities.
- Alteration of habitat.
- Creation of an impenetrable barrier to wildlife movement.
- Regulations pertaining to threatened and endangered species.

References

Endangered Species Act of 1973:

http://www.fhwa.dot.gov/environment/env_sum.htm#AN

Environmental Procedures Manual, M 31-11, WSDOT

<http://www.wsdot.wa.gov/eesc/environmental/Projects.htm>

Resources

EAO Wildlife Biologist/Biology Projects Coordinator

Regional Biologist

Regional Environmental Coordinator

Definitions

anadromous Born in fresh water, migrating to and living in salt water, and then returning to freshwater to reproduce.¹

¹ Johnson and Stipula. 1993. p. G1

critical habitat Specific areas that possess physical or biological features that are essential to the conservation of a listed species. These might require special management considerations or protection.²

endangered species Any species that is in danger of extinction throughout all or a significant portion of its range.³

habitat The environment occupied by individuals of a particular species, population, or community.

listed species Any species listed by a state or federal agency as threatened or endangered under the [Endangered Species Act of 1973](#).

migration corridor An area that is usually used by migrating wildlife to move between suitable habitat.

native Applied to a species that occurs naturally in an area and, therefore, one that has not been introduced by humans either accidentally or intentionally.⁴

old growth forest A late successional or climax stage in forest development. In western Washington, ancient or old growth forests have a canopy of very large living conifers, shade-tolerant trees beneath the canopy, and abundant large snags and logs.⁵

riparian The interface of aquatic and terrestrial systems in flood plains, rivers, and streams. Riparian systems are valued for diverse functions such as flood reduction, groundwater supply, streambank stabilization, habitat and migration corridors for wildlife, erosion control, and preservation of water habitats.⁶

species Includes any subspecies of fish, wildlife, or plants; any distinct population segment of any species of vertebrate fish or wildlife that interbreeds when mature.⁷

threatened species Any species that is likely to become an endangered species within the foreseeable future throughout all or a significant portion of its range.⁸

wildlife Any undomesticated animals, including vertebrates and invertebrates.

² Endangered Species Act of 1973

³ *ibid.*

⁴ Transportation Research Board. *NCHRP Report 379: Guidelines for the Development of Wetland Replacement Areas*. Washington, DC: 1996, p. 74.

⁵ Norse, Elliott A. *Ancient Forests of the Pacific Northwest*, Washington, DC: Island Press. 1990. p. 287.

⁶ TRB, 1996. p. 76.

⁷ Endangered Species Act, 1973

⁸ *Ibid.*

Planning

Identify all important wildlife habitat, such as nest and roost sites, and habitat used by threatened and endangered species during the project planning phase.

In addition to the federal Endangered Species Act, which protects threatened and endangered species, some kinds of wildlife habitat are protected and regulated by local jurisdictions. Examples of habitats that might be regulated by a local jurisdiction include: oak savannas, native outwash prairies, talus slopes, cliffs, riparian corridors, old growth forests, streams, and wetlands.

The following sources of information can be used to help identify these areas:

- Local jurisdiction's fish and wildlife habitat regulation and inventory maps. These maps identify what types of habitat the jurisdiction regulates, indicate where all the inventoried habitat areas are, and identify the regulations relating to the management and development of these areas.
- National Wetland Inventory Maps. These maps provide the location of wetlands on a large scale.
- Department of Natural Resources (DNR) stream typing maps. These maps indicate stream location and type.
- DNR Natural Heritage Program provides the location of high quality native plant communities.
- Washington Department of Fish and Wildlife (WDFW) Priority Habitat and Species provides information on the location of priority species and habitats.
- United States Fish & Wildlife Service Threatened and Endangered Species Section provides information on the location of threatened and endangered species and critical habitat.
- WSDOT deer kill data base provides information on which state highways experience large numbers of deer-and-vehicle collisions.
- Biological assessment by regional or EAO Biologist – usually required to identify uninventoried habitat features, identify wildlife migration corridors, and to verify wildlife use. Identification of some habitat features or seasonal use by a threatened or endangered species can be time dependent. For example, concentrations of wintering bald eagles can only be observed during the winter.

Design

When mitigation for wildlife impacts is recommended for a project, coordination between offices is necessary. The designer works closely with the regional Environmental Office. Address all wildlife concerns during the design phase. Examples are:

- Planning for large mammal overcrossing or undercrossing when a highway crosses a migratory route for deer or elk.
- Providing wildlife fencing where accident statistics indicate the need.



Figure 450.1 Elk Fencing on SR 90

- Planning for small animal migration across the highway. Consider barrier and culvert designs that allow passage.
- Flagging or survey markers to assist in locating and protecting large Douglas fir trees in critical spotted owl habitat.
- Habitat improvements for streams including in-stream placement of logs and root wads. Do not trim vegetation along the shores of creeks. If no vegetation is present, revegetate the streambank with desirable native riparian vegetation.

Either the regional or OSC Environmental Office prepares a biological assessment for projects having federal funds, actions, or permits to meet section 7 of the Threatened and [Endangered Species Act](#) as amended in 1973. The assessment assists in identifying wildlife concerns associated with the project and assessing the potential impacts.

Primary Considerations

Potential concerns involving transportation projects include:

- Loss of critical habitat for threatened and endangered species.

- Creation of uncrossable barriers for small mammals, reptiles, amphibians, insects, and fish.
- Disruption of migratory routes for larger mammals such as deer, elk, and bear.
- Disruption of migratory routes for anadromous fish.
- Increased human access and disturbance within the extensive home ranges of threatened and endangered species such as wolves and grizzly bears.
- Maintenance activities, practices, and policies that conflict with Best Management Practices for habitat management.
- Increased vehicle-and-animal collisions.
- Noise disruption during the breeding season of threatened, endangered, or sensitive species.
- Noise disruption during critical periods, for example wintering periods or migratory periods.
- Elimination of food resources.
- Impacts to water quality that would affect any species.

Minimize impacts to wildlife and wildlife habitat, and mitigate for the unavoidable impacts with the design.

Mitigation can involve:

- Vertical and horizontal road alignment shifts and modifications.
- Installing oversized culverts as wildlife underpasses.
- Installing wildlife overpasses.
- Including fish baffles in culverts.
- Reducing clearing limits to save significant trees.
- Wildlife reflectors. See [Design Manual](#) for placement.

Design sustainable mitigation systems by considering long-term maintenance needs.

Construction

Timing restrictions might be imposed on the project due to the presence of nesting, migrating, or wintering threatened or endangered species. Restrictions are dependent upon the distance from the species' activity center, the type of activity proposed, and the time of year the activity is proposed. Pile driving, blasting, and other noise generating activities are of the greatest concern. Timing restrictions might also be

placed on projects involving construction in or over water, such as culvert or bridge installation or pile driving.

Primary Considerations

During construction, clearly flag or place construction fencing around all habitat areas and features that are to be saved or avoided in the field, and include those locations in the plans of the project. This will minimize confusion and will help avoid impacting these areas and/or features.

Projects near stream or wetland habitat areas must have their erosion control measures carefully implemented and maintained during construction to avoid impacting aquatic species.

Maintenance

Maintenance activities impact wildlife habitat. The following maintenance activities will enhance wildlife habitat:

- Regional maintenance managers coordinate their planned maintenance activities with the regional Environmental Office.
- Field maintenance personnel are trained to ensure that adverse impacts do not occur. Commitment and cooperation of Maintenance and Environmental Office staff to bettering efforts to protect wildlife habitat will enhance both the work and the environmental interests of WSDOT.
- Do not clear vegetation in areas designated and preserved as critical habitat areas.
- A Memorandum of Understanding with the WDFW requires that WSDOT avoid mowing during the upland bird and migratory fowl nesting season in Eastern Washington. In those affected areas, delay highway roadside mowing until after July first.
- The Integrated Vegetation Management Plan includes provisions to allow and encourage native vegetation growth where possible and indicates how best to do so. It is appropriate to designate and provide areas such as this for habitat improvement within maintained highway right of way.
- Highway maintenance plans do not provide for construction of wildlife habitat or enhancement areas. However, prudent use of maintenance resources in combination with routine activities can effectively enhance wildlife habitat in many ways. Control of exotic species such as Himalaya blackberry and Scotch broom offer habitat benefits to native animals in addition to cleaning up a sight distance problem or signing installation site. Brush piles

created from clearing debris and logs offer habitat benefit if they are not obtrusive to other highway use considerations.

- Though not a maintenance function, projects undertaken by state forces might include features such as bird boxes, nesting platforms, and perches for raptors. In-stream placement of large woody debris such as logs and root wads can improve stream habitat, sometimes as on-site mitigation for needed maintenance work in HPA regulated projects.

Resolving Conflicting Requirements

Certain conflicts might arise during design, construction, and maintenance of the roadways. All parties are working together to provide the best possible product.

Coordination on wildlife habitat regulations and other environmental regulations can be completed by the regional biologist or the EAO Wildlife Biologist. Mediators and facilitators are available to resolve conflicts.

General

The purpose of this chapter and the noise abatement policy is to provide a means by which the Washington State Department of Transportation (WSDOT), in conjunction with other programs, can fairly and uniformly accommodate citizens seeking relief from the traffic noise generated by the vehicular use of state highways.

References

[National Highway System Designation Act of 1995](#)

United States Code of Federal Regulations 23 CFR 772, July 8, 1982,
<http://www.access.gpo.gov/nara/cfr/waisidx/23cfr772.html>

United States Code (USC) 23.109(i) Federal Aid Highways
Standards, <http://www4.law.cornell.edu/uscode/23/109.html>

Federal Highway Administration Report "Measurement of Highway-Related Noise," May 1996.

Priority Study for Noise Abatement of Existing State Highways, 1985, WSDOT, Northwest Region

Washington State Department of Transportation (WSDOT) Directive D 22-22, "Noise Evaluation for Existing State Highways"

[Design Manual](#), M 22-01, WSDOT

[Environmental Procedures Manual](#), M 31-11, WSDOT

[Standard Plans for Road, Bridge, and Municipal Construction](#), M 21-01, WSDOT

Resources:

Technical Services Unit,

The region's Environmental Office

OSC Environmental Affairs Office.

The region's Materials Engineer

The region's Landscape Architect Office

Definitions¹

decibel A decibel is a unit used to measure and describe the intensity of sound. A decibel is one-tenth of a Bel. A Bel is defined as the common logarithm of the ratio of two powers. Mathematically, a decibel is defined as:

$$\text{dB} = 10 \log_{10} (P_1/P_2),$$

Where P_2 is the reference pressure and is equal to $2 \times 10^{-5} \text{ N/m}^2$ (0.0002 μ bars).

dBA (A-Weighted Sound Level) The sound pressure levels in decibels measured with a frequency weighting network corresponding to the A-scale on a standard sound level meter as specified by ANSI S1.4-1971. The A-scale tends to suppress lower frequencies (below 1,000 Hz) and best approximates the sound as heard by the normal human ear.

insertion loss The actual acoustical benefit derived from a noise barrier.

Leq A statistical descriptor that provides a single number to describe the varying traffic noise levels. It is a constant, average sound level that, over the specified period of time, contains the same amount of sound energy as the varying levels of the traffic noise.

receiver Any human that could potentially experience wayside noise from vehicles on a roadway at a given location.

receptor A coordinate point in three dimensional space for which the decibel level is either measured or calculated. Receptor may also be referred to as a “receiver point”.

Requirements for Noise Analysis

The department considers placing abatement for traffic noise from state highways under two project types, a Type I for new projects, and a Type II for retrofit projects. Figure 460.1 shows the process involved in the decision to install a noise abatement barrier such as a wall or berm.

¹ Technical Services Unit, Northwest Region Environmental Office.

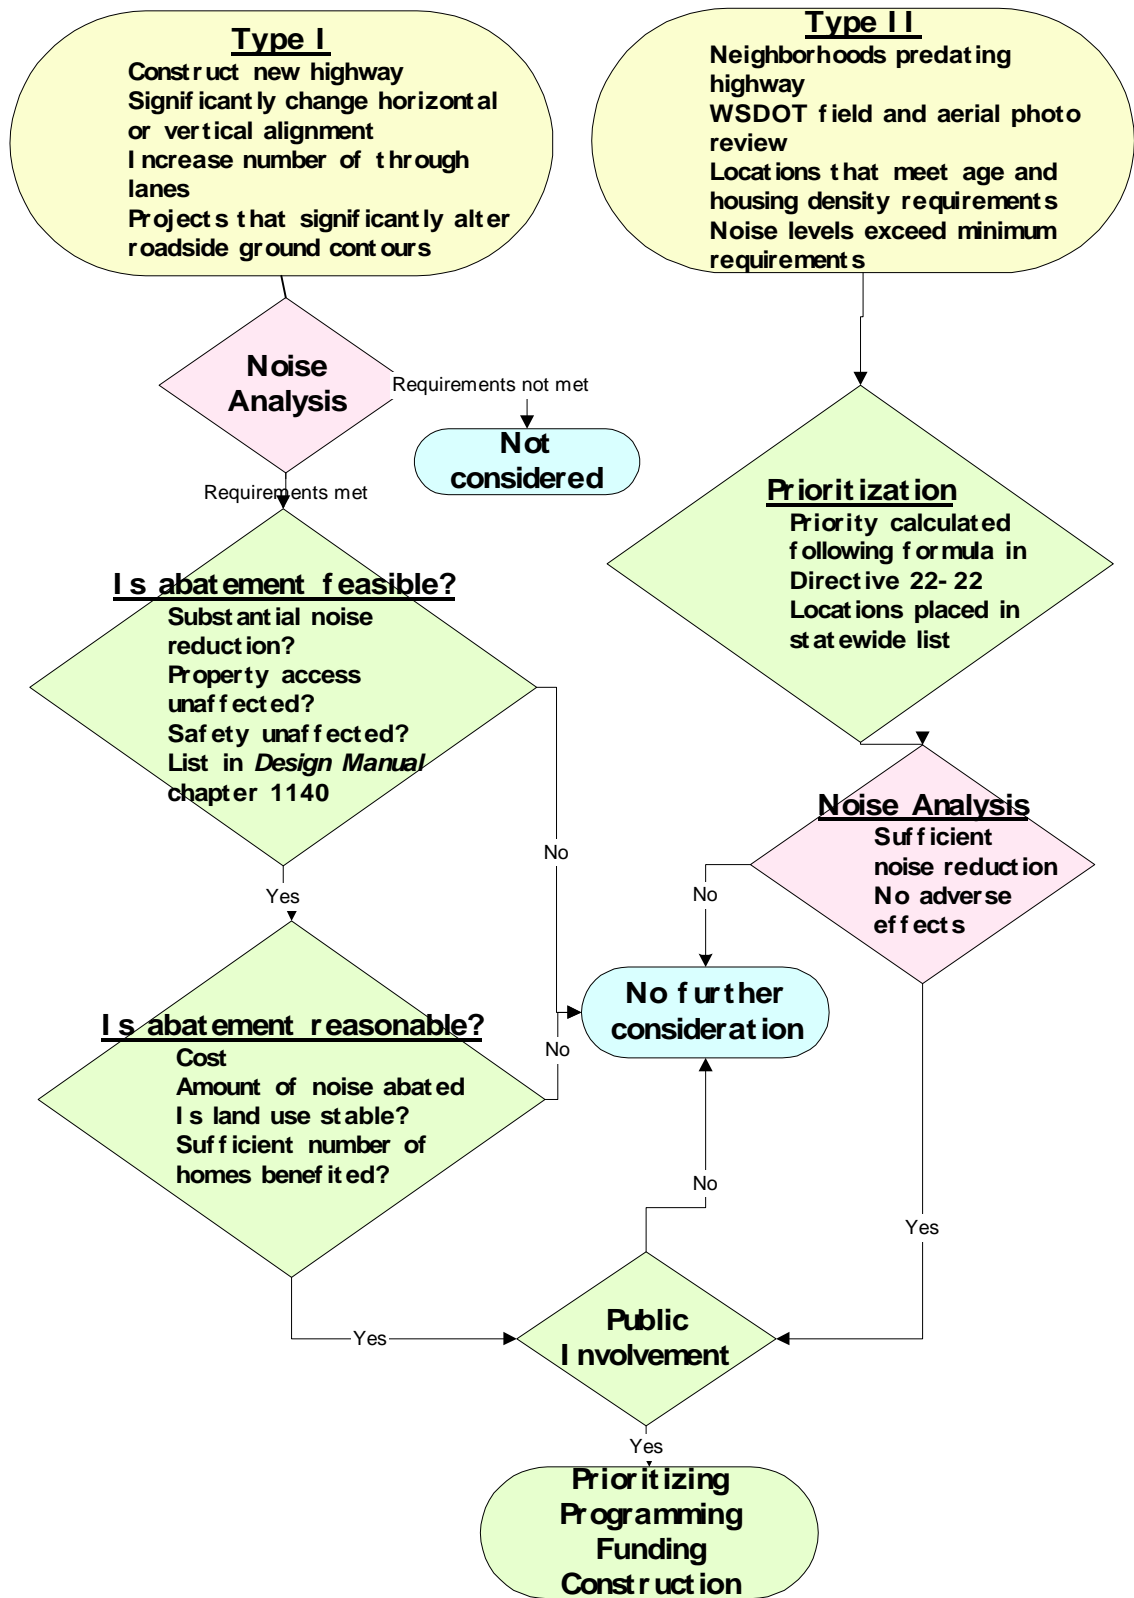


Figure 460.1 Noise Abatement Decision Process

Type I

A traffic noise analysis is required by law for projects having federal funds, actions, or permits and is required by state policy for other projects that meet any one of the following criteria:

- Involve construction of a new highway.
- Significantly change the horizontal or vertical alignment.
- Increase the number of through traffic lanes on an existing highway.

State policy and federal guidance also requires the review and possible consideration of abatement on projects that substantially alter the ground contours surrounding a state highway.

If analysis shows that noise abatement is feasible and reasonable, then it becomes part of the project. The Technical Services Unit or appropriate regional staff conducts the required noise analysis.

Noise barriers are considered where land use is changing rapidly if there is local zoning or ordinances to control the new development of noise sensitive land uses adjacent to transportation corridors.

The *date of public knowledge* is the date of approval of the Record of Decision (ROD) or Finding of No Significant Impact (FONSI). After this date WSDOT is not responsible for providing noise abatement for new development that occurs adjacent to the proposed highway project. Providing noise abatement becomes the responsibility of local communities and private developers.

Type II (Retrofit)

A Type II project is a proposed noise abatement project on an existing highway. These are stand alone projects and construction of these barriers is not necessarily associated with projects that provide capacity improvements. However, communities must meet the conditions of Directive D 22-22, 23 CFR 772 and section 339 (b)(2) of the "[National Highway System Designation Act of 1995.](#)"

The development and implementation of Type II projects are not mandatory requirements of USC 23.109(i). However, WSDOT maintains a retrofit list in order to provide greater noise abatement, where feasible and reasonable, as funding allows.

Retrofit projects are prioritized in an order reflecting traffic noise levels, number of homes benefiting, cost, and the achievable reductions. Sensitive areas are given extra consideration if most of the buildings existed before the highway.

Barriers for Type II projects are normally constructed in order of their priority but might be constructed as a Type I project or part of some other project.

Requirements for Consideration

Locations that are determined to be impacted by traffic noise levels will be considered for traffic noise abatement. Where abatement eligibility requirements are met, at a minimum, all of the following types of abatement must be considered:

- Traffic management measures. (For example: traffic control devices and signing for prohibition of certain vehicle types, time-use restrictions for certain vehicle types, and modified speed limits.)
- Change of alignment either vertical or horizontal.
- Construction of noise barriers.
- Acquisition of property.

In instances where severe traffic noise impacts occur, noise abatement measures other than those listed above may be proposed for Type I and II projects. These will be reviewed and approved by WSDOT (or the FHWA in the case of projects having federal funds, actions, or permits) on a case-by-case basis when the conditions of [23 CFR 772.13\(a\)](#) have been met.

When identifying and evaluating noise abatement measures to be incorporated in a project, the relevant criteria to consider are feasibility and reasonableness.

Feasibility deals primarily with engineering considerations like: “Can a substantial reduction be made?” or “Will abatement measures affect property access?”

Reasonableness assesses the practicality of the abatement measure given a number of factors including:

- Cost.
- Amount of noise reduction.
- Future absolute traffic noise levels.

It is WSDOT's policy to make final decisions on the construction of noise barriers after final horizontal and vertical alignments are determined and a detailed engineering analysis of the feasibility and reasonableness of noise abatement can be made. Only barriers that meet WSDOT's criteria, as accepted by FHWA, are constructed.

Department directive D 22-22 and the Priority Study for Noise Abatement of Existing State Highways outline the criteria for noise evaluation for Type 2 projects.

Feasibility

Noise abatement is considered only where noise impacts have been identified. [23 CFR 772](#) defines noise impacts as "impacts which occur when the predicted traffic noise levels approach or exceed the noise abatement criteria (NAC), or when the predicted traffic noise levels (design year) substantially exceed the existing noise levels." The department considers *approach* to be *within 1 decibel of* and *substantially exceed* to be *10 or more decibels above*.

Every reasonable effort is made to attain a 10 dBA (or greater) insertion loss at the first row of receivers. However, for a barrier to be included in a Type I study, a majority of the first row of receivers must get a minimum of a 5 dBA insertion loss and at least one receiver must have at least a 7 decibel reduction. Noise barrier construction is feasible if a minimum 7 dBA noise reduction can be achieved.

Safety factors to consider in the feasibility assessment of the noise abatement include the following:

- Maintaining a Design Clear Zone
- Redirection of errant vehicles
- Adequate sight distance
- Fire and other emergency vehicle access

Also consider potential environmental impacts to wetlands, historic properties, park lands, property access, utility placement, and other sensitive sites.

Though some noise might be reflected from a barrier placed on one side of the roadway to the unprotected side, studies have shown that any measured increases in noise levels have been less than can be perceived by normal human hearing. Little benefit is derived from making the wall absorptive.

Multiple reflections of noise between two parallel plane surfaces, such as noise barriers or retaining walls on both sides of a highway, can theoretically reduce the effectiveness of individual barriers and contribute to overall noise levels. There are designs available to mitigate this problem such as battered walls; however, they can be costly and their use can cause sound to travel to other locations. In this case, it might be appropriate to consider noise absorptive

treatments or to change wall orientation. Coordinate with the Technical Studies Unit when considering alternate designs.

Studies have suggested making the width-to-height ratio of the roadway section to the barriers at least 10W:1H to avoid a reduction in the performance of parallel reflective noise barriers. The width is the distance between the barriers, and the height is the average height of the barriers above the roadway. This means that two parallel barriers 3 m tall would be at least 30 m apart. Where this ratio cannot be achieved, consider other methods for at least one face.

Individual and Local Agency Participation

Where abatement costs would exceed the allowable limits as set in the department policy, individuals or the local government agency may be offered the option to share in the cost of abatement. This will only be allowed where such an offer is not in violation of other department or state policy or other regulation or law. Such an offer may be made under the following conditions:

- The department's share does not exceed the amount determined in this and other policy documents.
- The participating individuals or local agency pay the department the same amount as that determined to exceed the allowable costs as set forth in this or other policies.

Reasonableness

Once a noise barrier has been determined to be feasible, the department determines whether its construction is reasonable. The decision to recommend or not recommend a noise barrier is normally the responsibility of the region's Traffic Noise Abatement Manager or the Technical Services Unit with concurrence from design personnel.

Reasonableness is determined based on the following factors:

- Noise level in the design year approaches or exceeds the noise abatement criteria in [Table 1 of 23 CFR 772](#) or qualifies as a substantial exceedance.
- A majority of the first row of receivers obtain a minimum 5 dBA insertion loss and at least one receiver has at least a 7 decibel reduction.
- The noise mitigation cost per residence (or residential equivalent) is determined by counting all residences (including owner-occupied, rental units, mobile homes) benefited by the noise barrier in any subdivision or given development, and dividing that number into the total cost of the noise abatement measure. Each

unit in a multifamily building is counted as a separate residence. Refer to the *Environmental Procedures Manual*.

- The date of development is an important part of the determination of reasonableness. More consideration is given to developments that were built before the highway. For the purposes of definition, "most" will be defined as at least 50%.
- More consideration is also given to areas with larger increases over existing noise levels. This gives greater consideration to projects for highways in new locations and for major reconstruction than it does to projects of smaller magnitude.
- Severe noise impacts (either a predicted design year increase of at least 15 dBA over existing noise levels, or an absolute traffic noise level of 75 dBA Leq or more) receive additional consideration and might be allowed to exceed the above mentioned cost per household.

All human use areas, including those in areas zoned for commercial use, are included in a traffic noise analysis.

Normally, only outdoor areas of frequent human use are considered for noise abatement. Indoor locations may be considered if the noise levels of such areas approach or exceed the FHWA noise criteria per [23 CFR 772](#) and outdoor activities do not exist. Establishment of indoor noise levels is done in accordance with the conditions in the FHWA publication "Measurement of Highway-Related Noise."

Normally, noise abatement built pursuant to this policy will be constructed within the highway right of way. There can be cases in which department right of way is not the most prudent location for abatement, but abatement can be reasonable if constructed on adjacent property. In these cases:

- The department's cost is limited to normal cost for abatement on department right of way.
- The adjacent property owners allow access and easements as necessary to construct and maintain the barrier.

Primary consideration is given to ground floor outdoor activity areas. Design of noise mitigation measures for other than ground floor receivers often results in a wall that must be very high and would likely not meet the criteria (costs, visual impacts, and so forth). In addition, walls that are constructed tall enough to break the line of sight for higher receivers are seldom acceptable to ground floor residents. On occasion, a building with more than one floor might be so located that it is possible to mitigate traffic noise levels to an upper floor by constructing a noise barrier of reasonable height.

Mitigation is not excluded for ground floor impacts merely on the basis that mitigation cannot be provided for upper floor impacts.

The use of the property is included when considering the reasonableness of abatement. For example, churches, schools, and parks might be in use only during specific hours or days of the week. These same facilities generally have a greater number of receivers than if simply counted as a residence. In these cases, residential equivalents (usage factor multiplied by the number of users [see D 22-22, page 4]) are used. The residential equivalents in D 22-22 are used when including general use facilities in an analysis, whether for a Type I or Type II project.

The relationship of the location of a noise barrier to the receptors to be protected is considered in making a reasonableness determination. Very tall barriers located very close to the receptors can have a significant negative visual impact.

When the Noise Unit determines that noise abatement is reasonable, the costs of enhancing environmental or visual quality are not taken into consideration.

Extenuating Circumstances

Any special circumstances will be evaluated to determine whether to provide noise abatement. This could include the historical significance of an area or the presence of any long term efforts to maintain the character or cultural value of a sensitive area.

Public Involvement

Public involvement procedures are in the *Design Manual*. The design office and the noise abatement manager decide the appropriate level of public involvement for each project. The purpose of the public involvement is to assure that the wishes of the affected communities are known to the department and that every effort to provide noise abatement to an impacted community is made.

The opinions of the residents are incorporated in the design of the noise abatement. Where a location meets the eligibility requirements for noise abatement, the opinions of the public, and particularly those of adjacent property owners are used in determining whether a barrier or other practicable mitigation is implemented; the location, height, length of a barrier; and, where practicable, the composition and finish of a barrier. Opinions of the residents are also considered in the reevaluation of the assumptions used in applying reasonableness criteria.

Public involvement is also necessary to keep the adjacent communities informed of the actions of the department and of what to expect in the future. Depending on the size, controversy, and impact of the project, actions to involve the public might include the following:

- Special open houses
- Mailers
- Workshops
- Joint WSDOT/Citizen committees

Where a community or homeowner's association exists, all correspondence to members of the community will occur through the association to the greatest extent possible. Polls, petitions, or surveys of the communities' desires will only be considered valid if the following occur in conjunction with other criteria of this chapter:

- Performed by the department or performed by the association under the rules and bylaws of the association.
- Contain the address, signature, and printed name of residents along with their expressed wishes concerning abatement.

Residents living adjacent to a highway might have scenic vistas that they wish to maintain. Noise mitigation measures might be designed that effectively mitigate traffic noise while maintaining the vista. This issue is considered when assessing mitigation measures. If it is not possible to both effectively mitigate traffic noise and maintain the scenic view, the opinion of the majority of the residents determines whether abatement is placed.

Noise abatement will not be planned if it is obvious that the majority of the affected people are in opposition to or have no desire for noise mitigation.

The design office is responsible for ensuring that the desires of each community are known to the department and that correspondence is complete. This means, for instance, that the same people surveyed will in the same manner be apprised of the department's decision regarding abatement. Where barriers are proposed, this includes the approximate height, length, and alignment of barriers.

Coordination with Local Officials

Control of land use surrounding high traffic corridors is the most effective means of preventing impacts to residents. This control, however, is in the hands of local officials. For this reason, the

department assists the local government by providing information that will help them recognize the incompatible land uses near the state highways.

WSDOT apprises local officials as well as political representatives through the department's public involvement process as outlined in the [*Design Manual*](#), through participation in Metropolitan Planning Organization (MPO) and Regional Transportation Planning Organization (RTPO) planning sessions, and may take additional measures as determined on a case-by-case basis. Local officials are invited to all community meetings, noise related meetings, and open houses.

The department also provides officials with information regarding the anticipated noise levels to abutting properties for the purpose of reducing or eliminating future impacts to wayside residential use areas caused by traffic related noise.

Design

The two basic types of noise barriers are noise walls and earth berms. See the [Design Manual](#) for considerations in selecting the type of noise barrier, considerations in locating noise barriers, and design procedures. Noise berms are preferred where right of way widths and corridor continuity allow for their construction. An earthen noise berm can be constructed to full height or to partial height in conjunction with a noise wall to reach the required height. Refer to [Division 7](#) for information on earth berms. An alternative to noise barriers is realignment or lowering of highway profiles.

Once the height and location of a noise barrier have been determined in the noise report, they cannot be changed without affecting the abatement level. Therefore, any changes to height or location during design will require further noise analysis.

Departmental Coordination

When noise mitigation is recommended for a project, coordination between various offices is necessary. The Noise Unit makes the determination for a noise wall or berm. The Project Engineer's office determines whether a berm is appropriate given the right of way width, available materials, and other considerations, and then coordinates with other offices in the department as shown in Table 460.2.

OFFICE	ROLE
Project Manager	Prepare design using resources needed to add value to the project. See that permits are obtained. Conduct public involvement.
Real Estate Services	Negotiate acquisitions, easements, and leases.
Technical Services Unit	Noise analysis to determine need and feasibility. Calculate height, location, and orientation of noise barriers.
Access and Hearings	Assist in public involvement efforts. Assist in obtaining permits (State Design Engineer approval for limited access routes) for all openings in walls.
TransAid	Obtain construction permits from local governments (in some regions).
Materials	Obtain permits and investigate soils.
Utilities	Consult on utilities issues.
Surveying	Protect existing monuments. Survey ground breaks for walls with independent alignment.
Principal Architect	Provide list of acceptable wall designs and surfaces. Approve final wall design and surface selection through the Project Engineer's Office.
Structures	Design the wall if appropriate.
Landscape Architecture	Assist in selection of wall surface to blend within the corridor. Assist in siting the barrier. Design noise berms. Design landscaping for barriers.
Construction	Consult on constructibility issues. Administer the contract to construct the mitigation per plans.
Maintenance	Assist in siting barriers to respond to maintenance concerns.
Environmental	Consult on wildlife barrier issues. Obtain environmental permits.
Hydraulics	Consult on drainage issues.
Design Imaging Service Center	Develop proposed barrier images for public presentations.

Table 460.2 Coordination for Noise Abatement Measures

Safety

Provide for construction, maintenance, and emergency vehicle access so that the access road is less noticeable to travelers. Access may also be necessary for utilities. A principal concern is the placement of noise walls relative to nearby housing and pedestrian use. Consider planted setbacks from pedestrian paths to soften the visual impact of noise walls. The following figure illustrates the placement of noise walls relative to residential areas and access to safety elements such as fire hydrants.

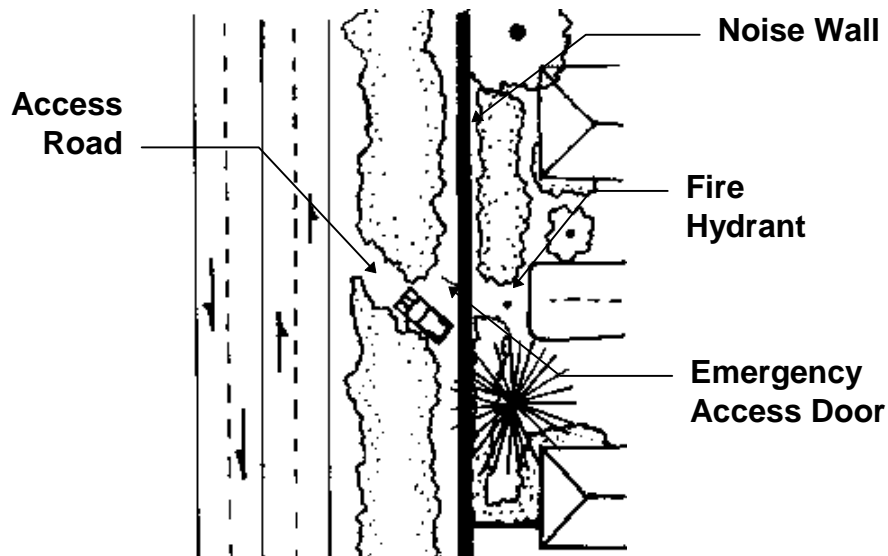


Figure 460.2 Provide Access Where Needed

Do not block fire hydrants with walls. Provide access to fire hydrants from roadway where practical. For example, the figure above shows an access door adjacent to a fire hydrant.

When designing and locating noise walls, consider providing harness tie off points or other safety mechanism where maintenance might be necessary and drop-offs are greater than 3 meters.

Visual Quality

Noise walls are not only seen from the road, they are seen from adjacent neighborhoods. In some cases it is preferable to retain vegetation and use a noise wall rather than to remove mature trees and use a berm.

Where practical, set noise walls back from the road and use vegetation to screen and soften the appearance of the wall as seen in the figure below. Texture can also be used to add visual appeal to noise walls. Vegetation and some textures also have acoustic benefits.



Figure 460.3 Textured Noise Wall with Vegetation

Consider the aesthetic advantage, to motorists and the community, of the combination of a short wall on top of a landscaped berm. When berms are combined with noise walls the acoustics are affected. Discuss this option with the Technical Services Unit during the Noise Analysis phase.

Consider use of tiered or stepped walls instead of just one wall. The resulting terraces can be planted with vegetation, which softens the appearance of the wall.

Construction

Construction noise is temporary but might adversely affect nearby residents. During project development, the design engineer considers ways to reduce or mitigate the adverse impacts of construction. All reasonable methods are incorporated in the plans and specifications of the contract.

In most cases, daytime noise from construction activities is exempt from local laws. For all other cases, permits from local agencies might be needed. Each local agency is contacted to determine the local regulation and whether a permit is required. Some acoustical analysis might be needed before the local agency will grant the permit. This is done on a case-by-case basis.

These same actions apply to maintenance activities in all but emergency situations. In the latter case, the police department and the

local permitting agency are to be contacted and apprised of the situation at the earliest possible opportunity.

Maintenance

Maintenance costs might increase when noise walls are used because of the increased cost of maintaining a structure and the cost of graffiti removal.

Locating a noise wall set back from the property line can leave a dead-zone creating a maintenance problem. Real Estate Services can negotiate air space leases to allow for maintenance by adjacent landowners.

Consult with the region's maintenance supervisor and consider maintenance permits with adjacent landowners in this situation. These can be coordinated through the Adopt-a-Highway program. The Northwest Region Noise Wall Construction Problems Report, 1995, provides information regarding these issues.

Additional Sources of Information

Federal Highway Administration Report Number FHWA-DP-58-1, "Noise Barrier Cost Reduction Procedure STAMINA 2.0\OPTIMA: User's Manual." March 1983.

Federal Highway Administration Special Report, "Highway Construction Noise: Measurement, Prediction and Mitigation." May 2, 1977.

Federal Highway Administration Technical Advisory T6160.2, "Analysis of Highway Construction Noise." March 13, 1984.

Federal Highway Administration Report, "FHWA Highway Traffic Noise Prediction Model," FHWA-RD-77-108.

Federal Highway Administration Report Number FHWA RD-76-58, "Noise Barrier Design Handbook." February 1976.

"Fundamentals and Abatement of Highway Traffic Noise," September 1980.

FHWA directive "Highway Traffic Noise Analysis and Abatement: Policy and Guidance", June 1995.

General

Roadside visual functions are those roadside features that are primarily perceived or experienced through sight. Primary visual functions include:

- Driver guidance and navigation
- Distraction and glare screening
- Corridor continuity
- Reinforcing community character
- Scenic preservation

The driver uses visual information from the roadside environment to assist in controlling, guiding, and navigating the vehicle as shown in Figure 500.1. The driver and passengers also form impressions and memories from what is seen along the roadside, thus roadsides are important in establishing community and state identity.

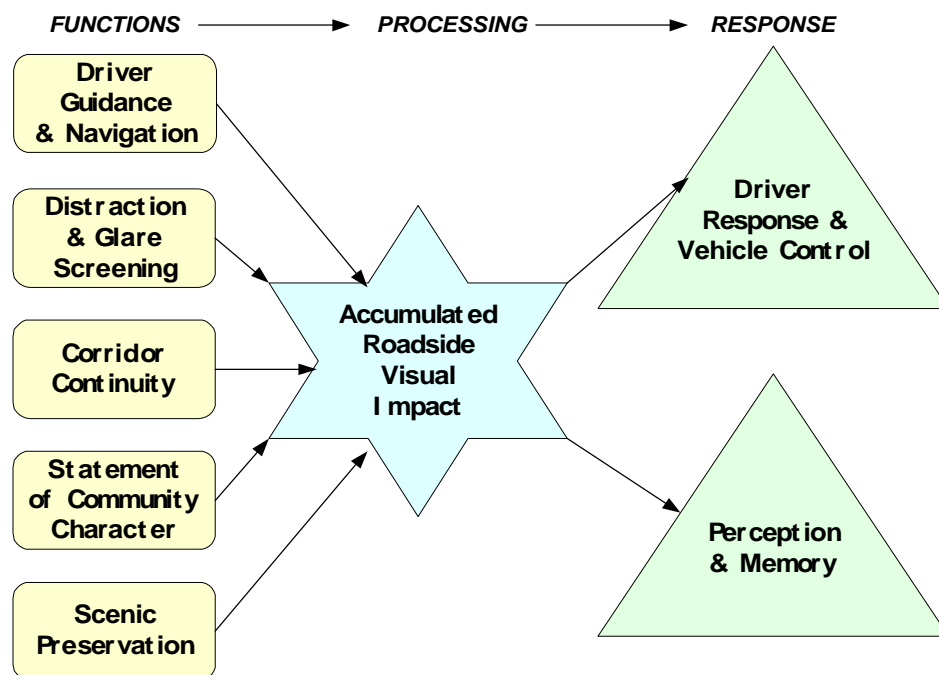


Figure 500.1 Input & Output Model for Roadside Visual Functions

The driver can only absorb and process a limited amount of visual information at a time. Excessive visual stimulation and complexity can

distract the driver and decrease driver control. Conversely, monotony from lack of visual interest can decrease driver attention and thus diminish control.¹ Difficulties with perception, attention, and distraction are a primary cause in over forty percent of traffic accidents.²

Visual stimuli are translated into driver responses. The sequence of visual events leading to an appropriate decision must be organized to meet this objective. Highway alignment, roadway geometrics, landform configurations, vegetation, and structures all contribute to driver guidance.

Visual functions are inseparable from other roadside functions. Operational functions such as sight distance, headlight screening, signing, and sunlight glare mitigation can also be considered visual functions. The retention of native vegetation and habitat, an environmental function, also has a visual impact on motorists.

Resources

The region's Landscape Architects

Field Operations Service and Support Center (FOSSC) Landscape Architect

Olympia Service Center (OSC) Highways and Local Programs Service Center, Heritage Corridors Program

OSC Roadside and Site Development Unit

References

[*Roadside Classification Plan*, WSDOT](#)

G. J. Alexander and H. Lunenfeld, *Positive Guidance In Traffic Control*, FHWA, Washington, D. C., April 1975.

G. J. Alexander and H. Lunenfeld, *Driver Expectancy In Highway Design and Traffic Operations*, USDOT Final Report FHWA-TO-86-1, FHWA, Washington, D. C., 1986.

Peter L. Hornbeck and Garland A. Okerlund, Jr., *Visual Values for the Highway User*, FHWA, Washington, D. C. (undated).

T. J. Post, G. J. Alexander, and H. Lunenfeld, *A User's Guide To Positive Guidance* (2nd edition), Report FHWA-TO-81, FHWA, Washington, D. C., 1981.

¹ A. Wertheim, 1978, "Explaining Highway Hypnosis." *Accident Analysis and Prevention*, 10:111-129.
G.W. Williams, 1963, "Highway Hypnosis," *International Journal of Clinical and Experimental Hypnosis*, 103: 143-151.

² Transportation Research Board, 1993

Sally Schauman, et al., *Visual Perception of the Roadway and Roadside Elements by the Observer in Motion*, Washington State Transportation Center, WA-RD 283-1, TRAC/WSDOT, Seattle, Washington, December 1992.

Transportation Research Board (TRB), *Human Factors Research In Highway Safety*, National Research Council, Circular 414, Washington, D. C., September 1993.

Definitions

aesthetics Evaluations and considerations with the sensory quality of resources (sight, sound, smell, taste, and touch) and especially with respect to judgment about their pleasurable qualities.³

cognition The mental process or function by which knowledge is acquired.

coherence Quality of state of being united in principles and relationships or to be logically and aesthetically connected.

complexity The multiple qualities in a landscape that provide visual interest such as the combination of form, color, and texture.

control The driver's ability to safely drive the vehicle.

corridor continuity The overall coordination and sequence of visual features as experienced by the roadway user.

expectancy The driver's readiness to respond to events, situations, or the presentation of information. It is primarily a function of the driver's experience.

feature A visually distinct or outstanding part, quality, or characteristic of a landscape.

³ U. S. Department of the Interior, Bureau of Land Management. BLM Manual: visual resource management, Washington D. C. 1977.

form The mass or shape of an object. Usually considered to be three dimensional. In the figure below, the forms of the mountain, hills and valley are shown.




Figure 500.2 Forms in the Landscape

landscape An area composed of interacting ecosystems that are repeated because of geology, land form, soils, climate, biota, and human influences throughout the area. Landscapes are generally of a size, shape, and pattern that is determined by interacting ecosystems.⁴

navigation Trip planning and execution.

view Something that is looked toward or kept in sight, especially a broad landscape or panorama. Act of looking toward an object or scene. The figure below shows views from the roadway toward the forest along the roadside.

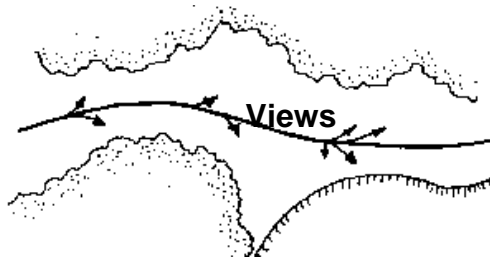


Figure 500.3 Views From the Roadway

vista A confined view, especially one seen through a long passage, as between rows of trees or down a canyon. A vista often focuses upon a specific feature in the landscape.

Policy

23 USC 1310A “Control of Outdoor Advertising”

The Congress hereby finds and declares that the erection and maintenance of outdoor advertising signs, displays, and devices in areas adjacent to the Interstate System and the primary system should be controlled in order to protect the public investment in such highways, to promote the safety and recreational value of public travel, and to preserve natural beauty

⁴ U. S. F. S., December 1995.

23 CFR 750 “Highway Beautification Act” of 1965 and all amendments.

This federal policy prohibits the clearing of vegetation along Interstate highways for viewing of commercial establishments.

RCW 47.32.130 Gives WSDOT the authority to remove objects and structures on, or in proximity to the right of way that pose an immediate threat to roadway safety.

RCW 47.38 Roadside Areas -- Safety Rest Areas

RCW 47.39 and amendments. Scenic and Recreational Highway Act of 1967.

RCW 47.42 “Highway Advertising Control and Scenic Vistas Act” Controls advertising signs along state highways.

Roadside Classification Plan, M 25-31, WSDOT

Planning

Fulfill the visual functions in accordance with the *Roadside Classification Plan* for achieving corridor continuity, blending, and buffering with adjacent land uses. The following measures will aid in achieving this goal.

- Provide adequate right of way to meet the requirements of the *Roadside Classification Plan* including acquisition of additional land for the following purposes:
 - Blending
 - Buffering
 - Screening
 - Environmental obligations
- Allow for generous medians and wide right of way buffer widths when acquiring land for state highways and state highway projects.
- Increase normal right of way widths to protect desirable views and vistas or to provide for visual screening.
- Consult the Corridor Plans along Scenic Byways or Heritage Tour Routes that reflect community preferences for treatment of the roadside and provide guidance for visual quality along roadway segments.
- Coordinate with the Heritage Corridors Program Office and the regional Planning Office to obtain current Corridor Plans on designated routes.

- Work with local communities to enhance community character.
- Consider partnership agreements with adjacent property owners to reduce maintenance impacts while ensuring adherence with the [Roadside Classification Plan](#).

Public Involvement

Public involvement in WSDOT roadside activities is conducted in a manner that is consistent with the process established for roadways in general. (See WSDOT [Design Manual](#) chapter on “Public Involvement and Hearings.”) It is the department’s goal that decisions be made in the best overall public interest and that other agencies and the public be involved early enough to influence project decisions.

WSDOT also conducts public meetings to get public responses to proposed transportation projects using visual simulations. In addition, WSDOT (partnering with universities) conducts visual preference research to assess drivers’ and community’s values and perceptions for roadside view alternatives.⁵

Design

Physical Features

Expectancy and Driver Response

Driver expectations are an important basis for the design of safe roadways. Roadside features can create patterns that can provide the driver with clues to what lies ahead. The visual environment can be enhanced to reinforce accurate expectations about what driving responses are necessary.

An effective highway design is based on predictability and coherence in the visual environment (corridor continuity). It anticipates driver expectations and surprise factors, and gives the driver sufficient visual information to accurately predict upcoming roadway conditions. This information forewarns drivers and helps them avoid accidents. Land use, sight distance, terrain, corridor continuity, screening distractions, and reinforcing visual features give the driver clues about the road ahead.

“Positive Guidance” is a process that uses engineering tools to optimize the highway system in order to improve traffic operations and safety at hazardous locations. When this procedure is applied, the

⁵ Schauman, et al., 1992, 1996

roadside features are an integral part of a Positive Guidance design of a highway information system.

Distraction

Drivers might have difficulty seeing and selecting relevant visual information within complex visual scenes. When there is too much visual information (“clutter”), drivers can be distracted and safety can be impaired.

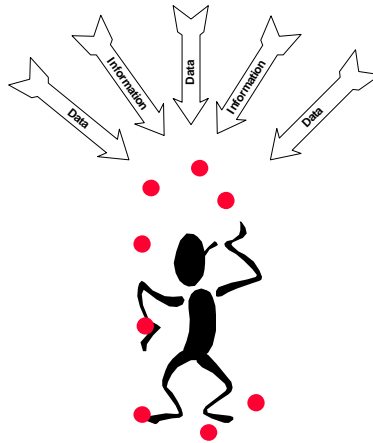


Figure 500.4 Juggling Too Much Visual Information Jeopardizes Safety

Drivers can make poor decisions when they are distracted. All aspects of the visible environment contribute to information overload and distraction. Special attention is required to keep highway directional signs to a minimum, and to locate them in such a way as to avoid distracting the driver.

Research on advertising signs within view of the roadway suggests that novel, sensuous, or moving displays are likely to distract the driver’s attention. Minimize these distractions through roadside screening or negotiations with responsible parties. When this fails, WSDOT has the authority to remove object and structures outside the right of way that pose an immediate threat to motorists and roadway safety ([RCW 47.32.130](#)). Such action may especially be warranted where accident data verifies that such object or structure does indeed pose a safety hazard.

Recommendations

Design in such a way as to:

- Send a clear message.
- Minimize visual distractions.

- Design roadsides so they are sustainable, given expected service level and funding.
- Define the roadway through appropriate roadside treatments (landform, vegetation, wall treatment, and so forth) to enhance guidance characteristics.
- Provide for screening of distractions with berms and vegetation.
- Avoid unnecessary tree removal next to commercial and industrially zoned areas.
- When designing for roadside treatment, consider the existing treatment or character of the adjacent road segment to provide for corridor continuity.

Roadsides and Memory

Perceptual or cognitive factors influence the memories or impressions of a place. It is the roadside and the view from the road that the driver or visitor remembers long after having driven along the road.

Roadsides are more than a buffer for the roadway; they are often the transition into a community. Drivers associate and derive impressions about communities by what they see along the roadside. The roadside *can* be a community amenity. The preservation of visual quality strongly supports the economic interests of the state through the tourism industry. WSDOT will endeavor to support a community's effort to enhance their entrance as outlined in the [*Roadside Classification Plan*](#).

The presence of natural features and the perception of a clean, healthy natural environment have often been linked with positive visual preference.⁶ Among scenic roadway users, natural features (lakes, rivers, mountains, hills, natural vegetation, long distance views) are most highly valued.⁷ Structures and activities having a negative impact on the natural quality of the landscape are regarded with suspicion, and commercial establishments, signs, and multifamily housing are generally viewed as detractors to visual quality. Research on the extent of agreement among observers of environmental attractiveness found that natural and rural environments are preferred over urban and semiurban environments.⁸ However, visual features that fit the locality and contribute to a sense of place are generally valued by the public. Cultural landscapes are generally most valued by the people who live nearby.⁹

⁶ Kaplan and Kaplan, 1982, 1989 and Kaplan, 1995.

⁷ Kent, 1993.

⁸ Coughlin and Goldstein, 1970. and Ulrich, 1981, 1986.

⁹ Melnick, 1983.

Directed Attention Fatigue

People use directed attention to work in distracting surroundings and make decisions in complex situations, such as driving on heavily traveled roads. The visual environment can aggravate or alleviate directed attention fatigue. Extended, unrelieved periods of directed attention can diminish the capacity to analyze, plan, and make decisions resulting in irritability and taking unnecessary risks. Visual access to natural environments is one of the key elements in counteracting directed attention fatigue through restorative experiences.¹⁰ There is increasing evidence¹¹ to suggest that natural and naturalized roadsides might diminish or alleviate directed attention fatigue in the roadway user. Therefore, careful planning and design of corridor views for scenic vistas and aesthetically pleasing roadside treatment can be important for improving roadway safety.

Recommendations

- Consider viewer perceptions when designing and maintaining roadside areas.
- Provide for opening up desirable views by planting or encouraging low growing vegetation.
- Consider berms and vegetation to screen undesirable views where right of way widths and corridor continuity allow.
- Consider working with community partners to provide community gateways that enhance roadside character in keeping with the [*Roadside Classification Plan*](#).

Maintenance

Maintenance activities affect roadside visual quality. When there are extensive visual impacts from a maintenance activity, such as removal of significant vegetation, public involvement is recommended. The Corridor Plan can be used for guidance.

- Identify opportunities to partner with adjacent land owners to preserve or reveal desirable views and roadside segments that enhance or maintain corridor continuity. (It is not WSDOT policy to remove vegetation to open up views toward commercial properties.) Balance desirable visual functions with the needs of roadway users and adjacent land owners.

¹⁰ Kaplan, 1995.

¹¹ Parsons, et al., 1998.

- Coordinate with the regional Landscape Architect, or the OSC Region Liaison Landscape Architect in regions without a Landscape Architect.
- On Scenic Byways coordinate with the Heritage Corridors Program Office.
- Enhance or retain vegetation to screen undesirable views and to meet the requirements of the *Roadside Classification Plan* (corridor continuity, blending with , and buffering adjacent land uses).
- Maintain low growing vegetation or limb up trees to retain desirable views.
- Carefully consider actions before removing vegetation to open up views. Consider whether development adjacent to the highway is likely to eliminate the view after removing vegetation. Analyze the angle of view from the driver's perspective and minimize removal of vegetation to meet the view objective. Consider selective removal of tree limbs or removal of only the limbs on the lower one third of the tree to reveal desirable views.
- Consider the Corridor Plan as a basis for determining the Maintenance Plan and funding service levels for a given highway corridor.

Additional Sources of Information

Robert E. Coughlin and Karen A. Goldstein, *The Extent Of Agreement Among Observers On Environmental Attractiveness*, Regional Science Research Institute discussion paper #37, Philadelphia, PA, February 1970.

C.W. Hamilton, R. Bell, D. Giblin, K. Wolf, and K. Ewing, *Planting for Sustainable Roadsides: Empirical and Experimental Studies and Recommendations for Western Washington*. Technical Research Report WA-RD 439.1. Olympia, Washington: Washington State Department of Transportation, 1998. Chapter Four: Landscape Perception and Roadside Design Guidelines.

R. Kaplan and S. Kaplan, *The Experience Of Nature: A Psychological Perspective*, Cambridge University Press, Cambridge and New York, 1989.

R. Kaplan and S. Kaplan, *Cognition And Environment: Functioning In An Uncertain World*, Praeger Publishers, New York, 1982.

Stephen Kaplan, "The Urban Forest As A Source Of Psychological Well-Being," *Urban Forest Landscape*, Gordon A. Bradley, ed.,

University of Washington Press, Seattle and London, 1995, pp. 100-108.

Richard L. Kent, "Attributes, Features, And Reasons For Enjoyment Of Scenic Routes: A Comparison Of Experts, Residents, And Citizens," *Landscape Research* 18(2) 1993 92-102, 1993.

R. Z. Melnick, "Protecting Rural Cultural Landscapes: Finding Value In The Countryside," *Landscape Journal* 2:85-96, 1983.

P. A. Miller, "Scenic Value In The Urbanizing Landscape," *Urban Forest Landscape*, Gordon A. Bradley, ed., University of Washington Press, Seattle and London, 1995, pp. 111-127.

R. Parsons, Tassinary, L. G., Ulrich, R. S., Hebl, M. R., and M. M. Grossman, "The View From The Road: Implications For Stress Recovery And Immunization," *Journal of Environmental Psychology*, November 1998.

Carla B. Rabinowitz and Robert E. Coughlin, "Analysis Of Landscape Characteristics Relevant To Preference," Regional Science Research Institute discussion paper # 38, Philadelphia, PA, March 1970.

Robert Ulrich, "Human Responses to Vegetation and Landscapes," *Landscape and Urban Planning* 13, 1986 pp. 29-44.

--- "Natural Versus Urban Scenes: Some Psychophysiological Effects," *Environment and Behavior*, 13.5, 1981, pp. 523-56.

--- "Scenery in the Travel Route," in *Experience of Nature*, Rachel and Steven Kaplan, eds., 1974.

K. Wolf, *The View From the Road*, Seattle, WA, 1998.

<http://www.cfr.washington.edu/enviro-mind/>

General

Auxiliary functions are those functions that serve additional operational, environmental, and visual functions for a complete transportation system. Examples of auxiliary functions are community enhancement areas, safety rest areas, farming of roadsides, and quarries and pit sites.

Auxiliary functions enhance driver and passenger safety, comfort, and mobility, or are related to roadway maintenance.

Safety Rest Areas & Traveler Services

General

In the late 1960's, WSDOT received federal funds to develop a statewide system of rest stops for the traveling public on interstate routes. The program has since expanded to include other than interstate routes. Roadside facilities, such as safety rest areas, roadside parks, points of interest, and traveler information centers, encourage the safe and pleasurable use of Washington's highway system by providing opportunities for rest and orientation. These facilities give highway users a chance to relax, exercise their pets, plan their trip, obtain traveler information, or use other services. Benefits include reduced driver fatigue, improved safety, refuge from adverse driving conditions, and enhanced tourism. This chapter includes planning, design, maintenance, and operational guidelines for these facilities.

Resources

The chart accompanying this chapter displays the many disciplines involved in safety rest area (SRA) planning, design, construction, maintenance, etc. It outlines the roles they play during the different phases of SRA management. The Heritage Corridors Program is the chief contact point for questions concerning safety rest areas and other traveler services.

References

- 42 USC Section 12101 et seq [Americans with Disabilities Act of 1990](#)
- [23 CFR](#) - Highways
 - [752](#) - Landscape and roadside development (Code Federal Regulations [CFR]). Non-regulatory supplement (OPI: HNG-14) contains information on vending machines in Interstate Rest Areas and abandonment of Interstate Rest Areas.
 - [771](#) Environmental impact and related procedures.
- Revised Code of Washington ([RCW](#)) [46.16.063](#) Additional fee for recreational vehicles.
- [RCW 46.68.170 RV](#) account -- Use for sanitary disposal systems.
- [RCW 47.06.040](#) State-wide multimodal transportation plan.
- [RCW 47.28.030](#) Contracts -- State Forces

- [RCW 47.38](#) Roadside Areas -- Safety Rest Areas
- [RCW 47.39](#) Scenic and Recreational Highway Act of 1967
- Washington Administrative Code ([WAC](#)) [Title 51-40](#) Uniform Building Code Requirements for Barrier-Free Accessibility
- [WAC Title 246-290](#) Public Water Supplies
- [Design Manual](#), M 22-01, WSDOT
- [Highway Runoff Manual](#), M 31-16, WSDOT
- *Highway System Plan*, WSDOT
- [Hydraulics Manual](#), M 23-03, WSDOT
- *Maintenance Manual*, M 51-01, WSDOT
- *Right of Way Manual*, M 26-01, WSDOT
- [Roadside Classification Plan](#), M 25-31, WSDOT
- [Traffic Manual](#), M 51-02, WSDOT
- *Manual on Uniform Traffic Control Devices*, (MUTCD), USDOT, FHWA; including the *Washington State Modifications to the MUTCD*, M 24-01, WSDOT
- *Safety Rest Areas: Planning, Location and Design*, USDOT, FHWA, 1981

Agreements

Interpretive Signs and Markers, Agreement with Washington State Parks Commission

(GM 869) 1989. Heritage Corridors Program, Highways and Local Programs Service Center are responsible for this agreement.

Traveler and Commercial Information Services

Agreement with a private vendor for the sole right to provide commercial advertisement in safety rest areas. Heritage Corridors Program is responsible for this agreement.

Vending Machines

Agreement with Services for the Blind for the placement and operation of vending machines within safety rest areas (GCA 10377) 1994. Field Operations and Support is responsible for this agreement.

Definitions

ancillary services Those secondary services provided at safety rest areas that include, but are not limited to, vending machines,

interpretive signing, telephones, recreational vehicle (RV) sanitary disposal facilities, trails, scenic viewpoints, commercial and public information displays, and visitor information centers.

DCTED Department of Community, Trade, and Economic Development. Their website is found at: <http://www.wa.gov/cted/> Provides leadership and support to Washington and its diverse communities to excel as places to live, work, play, and do business.

information display A kiosk that includes a map of Washington, local travel services, and attractions. In selected safety rest areas, commercial travel information is provided. The display may be free standing or mounted.

kiosk A conveniently located structure accommodating ancillary services such as vending machines, traveler information, or telephones. The kiosk might also include a sheltered area for serving refreshments on a donation basis.

point of interest A scenic, historical, natural, or other attraction of sufficient interest to travelers to warrant construction of a pullout and/or viewing area within WSDOT right of way. The site might include interpretive displays, potable water, or other ancillary services. A Point of Interest might be located within a larger roadside park or safety rest area.

recreational vehicle (RV) A general term used to describe motorized vehicles designed for pleasure travel. The cabin design frequently includes sleeping, eating, and toilet facilities.

recreational vehicle account In Washington, an account funded by an annual recreational vehicle license fee. Proceeds fund the construction, maintenance, and operation of RV sanitary disposal facilities in safety rest areas on federal-aid highways as authorized by RCW 46.68.

Recreational Vehicle Citizens Advisory Committee A volunteer advisory committee established under [RCW 46.10.063](#) which provides for input from “citizen representatives of the recreational vehicle user community.” The committee provides guidance on the expenditure of funds from the Recreational Vehicle Account and advises WSDOT on operation of sanitary disposal facilities.

roadside park A roadside user facility for safe vehicular parking off the traveled way. These sites might be equipped with features or elements such as a point of interest, picnic tables, and/or chemical toilets. Unlike a safety rest area, a roadside park does not *necessarily* provide a permanent rest room building.

Safety Rest Area Roadside Master Plan A map of existing and projected safety rest areas and roadside parks. The Master Plan considers a 20 year planning horizon.

safety rest area (SRA) A roadside facility equipped with permanent rest room building(s), parking area, potable water, picnic tables, refuse receptacles, illumination, telephones, and other ancillary services. SRAs might include traveler information.

Safety Rest Area Team A WSDOT working group representing various divisions, regions, service centers, and offices responsible for safety rest area planning, programming, design, construction, maintenance, and operation. The team assists the Heritage Corridors Program in the development of short and long term plans and budgets.

traveler information Commercial and non-commercial information that informs and orients the traveling public. Examples include access information for food, gas, lodging, local attractions, regional tourist attractions, roadway conditions, and construction schedules.

vicinity zones Areas on the National Highway System and on Scenic and Recreational Highways that need a safety rest area or roadside park facility in order to meet WSDOT service objectives.

visitor information center A staffed or non staffed facility that displays and dispenses free tourist and travel maps and brochures.

Volunteer Refreshment Program A program that allows non-profit service organizations to serve refreshments to the traveling public on a donation basis.

Policy

The Transportation Commission adopts the Highway System Plan that includes service objectives for safety rest areas (SRA), roadside parks, and points of interest. Funding for safety rest areas and roadside parks is provided through the Preservation (P3) and Improvement (I3) budgets.

The following table, shows the Transportation Commission's service objectives and the goals that are used to meet those objectives by the Heritage Corridors Program.

SERVICE OBJECTIVES	SRA GOAL
Maintain state highways on a daily basis to ensure safe, reliable, and pleasant movement of people and goods.	Provide the traveler with safe, clean, reliable, and pleasant rest area facilities.
Preserve the highway infrastructure cost effectively to protect the public investment.	Refurbish rest areas to extend service life and improve safety.
Support tourism development and other industries.	Ensure public access to appropriately sized, rest room equipped facilities every 60 miles on the National Highway System and Scenic and Recreational Highways.
Preserve, restore, enhance and maintain the heritage resources along Scenic & Recreational highways.	Maintain and enhance facilities as identified in Corridor Management Plans.
Develop a statewide network of traveler information.	Provide traveler and commercial information facilities and services along or accessible from Scenic and Recreational Highways.

Table 610.1 WSDOT Service Objectives and Safety Rest Area Goals

Location and Site Design

Conformance with Safety Rest Area and Roadside Park Master Plan

Use the Safety Rest Area and Roadside Park Master Plan as a guide to site location. Check maps of the current plan, which are available from Heritage Corridors Program (HCP).

Spacing

- Space SRAs and roadside parks approximately every 60 miles on National Highway System and Scenic and Recreational Highways.
- Consider the location of other available public facilities when deciding where to locate a SRA. (Other public facilities might fill traveler needs or provide partnering opportunities for cost savings, improved service, or additional amenities.)

Availability of Utilities

- Determine the proximity and availability of water, power, and sewage systems prior to site acquisition. Prepare the required legal documents, such as well agreements, easements, water rights, and acquisition documents.
- Use traffic data from the Transportation Data Office to determine if potable water supply, electric power, parking area space, and sewage disposal are adequate for the anticipated needs.
- Consider future expansion needs for a 20 to 50 year planning horizon, especially for sites using on-site sewage or water systems.

Site Conditions

Safety rest areas require certain site conditions to fulfill their function. SRAs need large parcels of land to provide adequate space for parking passenger vehicles and trucks and for sewage lagoons. They also need level building sites and safe ingress and egress from the highway. Consider the project from a Value Engineering perspective and with the following site selection criteria:

- Grade and aspect of slope to accommodate parking, sewage lagoons, and building site.
- History of flooding and relationship of the grade to the high water line (if site is within floodplain).
- Soil conditions. Soil bearing capacity determines building load and roadway support capabilities plus the potential for earth movement. Sewage lagoon design is affected by soil type.

- Vegetation and natural features on the site affect site design and might require mitigation if impacted.
- Prevailing wind direction and typical wind velocities can affect building siting and design and visitor experience.

Adjacent Land Use

- Consult local planning offices for information on zoning and expected development in the area of the proposed site to determine if those uses are compatible with a rest stop.
- Acquire a buffer area or scenic easement on adjacent lands, if possible, to protect scenic views and existing vegetation.
- Incorporate any cultural, historical, or scenic points of interest into the site design to enhance visitor experience and education.

Traffic Ingress and Egress

- Refer to *Design Manual* for guidance on ramp design and when designing access to rest areas from highways without access control.
- Locate safety rest areas on access controlled highways a minimum of 1 mile from the closest on or off ramp ending.
- Use a level or negative grade on the ramp leaving the facility in order to allow big trucks and heavy RVs to pick up adequate speed.

Parking Area Design

- Parking area design is included in an ultimate buildout plan. Include stages on the plan.
- Provide separate parking areas for trucks, passenger cars, and RVs. Truck drivers prefer their parking area to be on the left for ease of merging onto the highway. Consider separating truck parking from RV parking in SRAs that allow 8 hour stays.
- Design passenger car parking stalls to be at least 3 m (10 ft) wide.
- Provide shade for vehicles where practical.
- Divide large paved parking areas into smaller segments with planting islands. Design planting islands to facilitate sweeping and snow plowing. For example, provide radii on planting islands to accommodate sweeping equipment.
- Provide areas for snow storage requirements.

- Refer to the *Hydraulics Manual* for drainage design.
- Preserve existing landscape features to the greatest extent possible.
- Design vehicular and pedestrian circulation to be safe, simple, direct, and obvious.
- Americans with Disabilities Act (ADA) accessible parking stalls are usually closest to the restroom building.

Walkways

Consider the following guidelines:

- Design walkways for direct pedestrian movement to all facilities.
- Design walk widths to handle peak hour pedestrian traffic. Provide at least 3 m (10 ft) wide walkways.
- Comply with ADA requirements.
- Design the access route to buildings and utilities to accommodate service vehicles.

Recreational Trails

- Provide recreational trails where practical.
- Consider paving or stabilizing some recreational trails to facilitate ADA access. Refer to *Design Manual* for sidewalk design.

Picnic Tables

- Provide one picnic table for every ten passenger car parking stalls, with a minimum of four tables per SRA.
- Provide shelters for 50 percent of the picnic tables at each site, (Two or more tables might be clustered under one roof.) Provide wind screens for picnic tables in areas exposed to frequent high winds.
- Provide a minimum of one ADA accessible picnic table per safety rest area.
- Place picnic tables near or adjacent to walkways, but far enough from the restrooms to provide some privacy to users.
- Place tables on concrete slabs.
- Provide a water source with a quick coupler valve within 30 m (100 ft) of the picnic table for cleaning purposes.
- Place accessible trash receptacles near each picnic area.

Bicycle Facilities

Provide bicycle racks where appropriate. Consider providing access from bicycle routes on local roads when they are directly adjacent to safety rest areas or roadside facilities. Consideration of this action is made in concert with local law enforcement and local community groups, and may require early FHWA approval since it is an access break.

Vegetation

Vegetation enhances the physical environment by providing shade, shelter from wind, visual screening, wildlife habitat, and other benefits. The goal of planting design and plant selection in safety rest areas is to provide those functions while also providing a safe environment. Refer to the Vegetation chapter of this manual for more detail.

- Design the planting plan, choose plant species, and maintain vegetation for clear sight lines. Do not create hiding places near walkways and parking lots.
- Design low maintenance, obstacle-free lawns.
- Round lawn edges to match the turning radius of large mowing equipment.
- Select vegetation to minimize water usage. Recycling of wastewater might be an option for irrigation in some locations.

Pet Areas

- Provide ADA accessible, well-lit areas for visitors to walk their pets away from, and downwind of, picnic areas, kiosks, and plaza areas and away from moving vehicles.
- Provide trash receptacles near pet areas.
- Consider providing shade.

Site Activities

Safety rest areas might provide opportunities for activities such as Motorcycle Safety Day and regional bicycle event check points.

- The region's Operation Office coordinates site activities.
- HCP and Field Operations and Support Services Center (FOSSC) coordinate improvements or activities that involve more than one region.

- POW/MIA Memorial requests are coordinated by OSC Field Operations and Support Services.

Utilities and Infrastructure

Contact the region's Utilities section for acquisition of Utility Service Agreements for any utility needs.

Future Utilities

- Provide sleeves and conduits for future utilities (water and sewer lines, power, telephone) during the initial stages of safety rest area development, in accordance with the ultimate site plan.
- Address safety rest area site-specific agreements with WSDOT maintenance, utility companies, and others during site design.

Telephones

Telephones are provided at most safety rest areas.

- Provide free-standing telephones in a visible, well lit, covered location, if practical.
- Direct dial telephones are provided according to Agreement AA-1-10312 in selected safety rest areas.

Where telephones have been removed due to extreme vandalism, consider advance signing of this condition.

Hydraulics, Wastewater, and Water System

- Refer to the [Hydraulics Manual](#) for information on water and sewage disposal systems, including reservoirs, long distance pressure sewers, septic tanks, drainfields, and sewage lagoons.
- OSC Hydraulics provides design recommendations that minimize costs.
- The Washington State Department of Health regulates drinking water, (Refer to [WAC Title 246-290.](#))
- Meter irrigation, building, and RV Dump Station water use separately. (Meter all water use.)
- Water rights are required from the Department of Ecology for well water use over 19,000 liters (5,000 gallons) a day.

Septic Tanks

- Provide access for pumping when installing new septic tanks.

- Refer to the *Hydraulics Manual* for additional guidelines.

Solid Waste Management

- Provide adequate area for locating trash receptacles on a widened sidewalk or plaza area, a minimum of 0.5 m (1 ft) from the lawn area and adjacent to parking areas, picnic areas, rest rooms, pet areas, and kiosks.
- Use waste receptacles that are easy to use and accessible to all.
- Encourage the use of recycled materials and offer recycling opportunities to the greatest extent practical.
- Encourage nonprofit groups to coordinate recycling programs for aluminum cans and newspaper whenever possible.
- Each region is responsible for the choice and method of waste disposal. Select bin location, size, and design to accommodate waste handling equipment needs.

Recreational Vehicle (RV) and RV Sanitary Disposal Facilities

- Construct recreational vehicle (RV) sanitary disposal facilities at sites served by municipal sewage treatment service, or at sites served by treatment lagoons, with adequate capacity. Drainfields are not an option because of sewage volumes, technical requirements, maintenance requirements, and costs.
- RV sanitary disposal facilities and associated maintenance, operation and sewage treatment costs are funded from the RV account. Meter RV sanitary waste disposal separately to assure appropriate cost distribution.
- OSC Fiscal Operations provides quarterly updates on expenditures from the RV account for review by the RV Citizens' Advisory Committee.

Buildings

Codes

Comply with the Uniform Building Code, the Americans with Disabilities Act, and other state and local codes and requirements.

Restroom Capacity Design

- Each restroom requires an ADA accessible toilet stall.
- Male/female ratio for restroom stalls is 40:60.

- Design the ability to close a portion of the restroom while cleaning, leaving a portion of each restroom open for use.

Plaza Areas

Provide paved plazas for pedestrians at all new safety rest areas. A plaza provides unobstructed pedestrian movement, enhances safety, and reduces wear and maintenance in areas of heavy use.

- Pave plazas with concrete or appropriate local materials. The *ADA Manual* does not recommend asphalt concrete pavement for plaza areas, curb cuts, or ADA accessible ramps.
- Consider pedestrian movement needs when locating fixtures, such as benches, kiosks, telephones, and vending machines, within the plaza area.
- Consider security, setbacks from walks, and sight lines for safety. Avoid creating potential hiding places.

Kiosks

- Install kiosks at all Interstate safety rest areas and at non-Interstate rest areas where a shelter is needed for information displays, vending machines, or refreshments served by volunteers.

A kiosk is usually equipped with backlit information displays.

- Wire and plumb kiosks for volunteer refreshment needs, backlit displays, and vending machines.
- Locate kiosks to give volunteers an unobstructed view of restroom entrances and as much of the site as possible.

Rehabilitation and Expansion

Rehabilitation might be required to correct deficiencies, minimize life cycle costs, or to extend the life of the facility. Rehabilitation might require, but is not limited to: upgrading the sewage system, installing a new roof, new partitions, restroom fixtures, insulation, and sealing the floor and walls. Additional work might include: resurfacing walkways; relocating building walls; constructing restroom buildings; expanding the parking area; providing or upgrading kiosks, RV dump stations, irrigation systems, picnic tables, sidewalks, plazas, heat/ventilation systems, or plumbing; and any related or general update to the surrounding vegetation and grounds, or safety and maintenance needs.

If expansion includes constructing a new restroom building, the new building must meet ADA accessibility requirements. Walkways and

plaza areas between the new and old building must also meet ADA accessibility requirements.

Operations

Signing

All traffic control signing for safety rest areas is the responsibility of the region's Traffic Office in accordance with *Manual of Uniform Traffic Control Devices* (MUTCD).

Development of guidelines for placement and content of pedestrian signs within safety rest areas is the responsibility of the Heritage Corridors Program in conjunction with the FOSSC office.

Design and install signs to minimize visual clutter.

Traveler Information Services

Traveler Information

Traveler information, provided by WSDOT at all safety rest area facilities, includes:

- State highway map
- Emergency information
- Safety rest area rules
- Nearby community attractions

Commercial Advertising

Information and commercial advertisements are allowed in selected safety rest areas under an operating contract. Advertisements promoting the use of drugs, alcohol or tobacco are not permitted.

Commercial traveler information includes:

- Commercial attractions
- Traveler services such as food, gas, and lodging
- Nonprofit attractions

The design and location of free-standing back-lit displays for commercial advertising signs are approved by the Architecture Office.

Advertising Concession

HCP is responsible for developing and implementing the advertising contract. This agreement provides the concessionaire with an exclusive right to sell commercial advertising space in selected safety rest areas. This agreement also allows for disbursing state publications and reserves space for state displays. Refer requests for commercial advertisement sales or material distribution to the Heritage Corridors Program.

The concessionaire is responsible for:

- Stocking supplies.
- Annual maintenance and periodic display upgrades.

Maintenance

The region's maintenance personnel are responsible for cleaning the sign surface and surrounding areas.

Notifications

The concessionaire notifies HCP and HCP notifies the region's Maintenance Superintendent, Design Office, and the SRA team prior to installing or removal traveler information displays, including interpretive signs.

Visitor Information Centers

HCP is responsible for agreement GCA 0083 with the Department of Community, Trade, and Economic Development. This agreement specifies the locations of gateway visitor information centers that use motor vehicle fuel tax revenues for their staffing.

Requests for relocation of Visitor Information Centers from WSDOT facilities are forwarded to the OSC Heritage Corridors Program. The contract requires a 90 day notice period.

Volunteer Refreshment Program

Nonprofit organizations are authorized to provide refreshments in selected safety rest areas.

- The non profit group will clearly display their name in the refreshment stand or kiosk.
- Donations may be accepted for refreshments.
- Solicitation is not allowed.

Each region's Operations Office or Maintenance Office, is responsible for scheduling nonprofit organizations, issuing permits, and adopting guidelines for the safe and clean operation of the program.

Vending Machines

The operation and maintenance of vending machines (including newspaper stands) is the responsibility of Services for the Blind under a “GC” agreement.

- OSC Field Operations and Support Service Center (FOSSC) is responsible for developing and updating agreement GC 10377.
- Area Maintenance Offices and Services for the Blind determine the best location for vending machines and provide suitable support facilities.

Security Considerations

A safer environment is created by:

- Providing adequate lighting and coordinating security efforts with the Washington State Patrol (WSP).
- Tracking incident trends and reporting them to the HCP.

Volunteers distributing refreshments can provide additional security where refreshment shelters are centrally located.

Refer to [Division 8](#) of this manual for recommendations on designing planting plans and maintaining vegetation for security.

Partnership Agreements

Public and private partnerships may provide opportunities to improve and expand the safety rest area facility system.

Limit such “partnership” safety rest area developments to vicinity zones identified within the system plan. Roadside parks and points of interest might be developed outside of vicinity zones. Sites within vicinity zones have first priority.

Prioritize projects according to critical needs such as volume, distance to nearest public facility, and routes served; and a statewide system cost/benefit analysis.

Early coordination and communication between Field Operations and the agreement sponsor (“partner”) are important to ensure that there is adequate funding, especially if WSDOT is charged with maintenance responsibilities.

Maintenance Plans

- The region’s Maintenance Superintendents are responsible for developing annual work plans for all rest stops.

- OSC Field Operations and Support Service Center, in cooperation with the regions, develops the level of service standards and the statewide biennial maintenance and operation budget for rest stops.

Temporary Closures

Generally, safety rest areas are open for public use throughout the year. Facilities, however, might be closed temporarily for the following reasons:

- Utility system failures
- Adverse weather conditions
- Emergencies
- Other safety precautions
- Reconstruction
- Periods of low use
- Maintenance
- Break down of equipment at the facility

The Regional Administrator has the authority to temporarily or seasonally close an SRA.

Notification of temporary closures is listed on the WSDOT website. Notification is also posted at the preceding safety rest areas and, when practical, at the site in advance of an expected closure.

Permanent Closures

Approval, Documentation, Notification

Safety rest areas may be closed permanently or relocated. [23 CFR 752](#) provides detailed closure procedures for Interstate safety rest areas. Evaluate SRA sites scheduled for closure for other transportation and highway uses. FHWA approval is required to transfer such facilities to other federal, state, or local agencies.

Level of Development

Roadside facilities have different levels of development and require varying site size and amenity levels. The table 610.2 shows site sizing, and site amenities for points of interest, roadside parks, tourist information centers, and safety rest areas.

Resource Matrix

Roadside facilities such as safety rest areas are complex projects requiring the cooperation of many experts. Table 610.3 is a multiple page table which shows the many offices involved in the many phases of safety rest area development and operation.

Level of Development for Roadside User Facilities				
Site Development	Point of Interest	Roadside Park	Tourist Information Center	Safety Rest Area
Site				
Minimum site size - best professional judgment based on site specific requirements	0-1 acres	1-3 acres	2-5 acres	3-30 acres
Potable water	no	optional	required	required
Electrical power	no	preferred	required	required
ADA code compliance	required	required	required	required
Sewage Disposal				
Off site sewage disposal	no	no	preferred	preferred
On site sewage disposal - lagoons, constructed wetlands, drainfields	no	optional	optional	optional
RV sanitary disposal systems	no	no	no	optional
Rest Room Facility				
Permanent building	no	optional	required	required
Toilets and wash basins	no	optional	preferred	required
Portable toilets (rentals), pit, chemical, vault or composting toilets	no	preferred	vault or compost optional	no
Parking and Pavement				
Impervious	optional	preferred	required	required
Soft surface/unpaved	optional	optional	no	no
Truck parking	no	no	optional	required
Recreational Vehicle parking	optional	preferred	required	required
Site Amenities				
Pedestrian plaza	no	no	preferred	preferred
Sidewalks	no	no	required	required
Picnic tables	no	preferred	no	required
Trails & nature walks	optional	optional	no	preferred
Pet walking area	no	optional	preferred	required
Bicycle access and/or racks	optional	optional	required	required
Vegetation RCP treatment level 3	no	no	required	required
Point of Interest - scenic viewpoint, historic, cultural and/or natural feature	required	optional	optional	optional
Ancillary Services				
Telephone service	no	optional	required	required
Refuse receptacles	optional	preferred	required	required
Vending machines	no	no	optional	required
Volunteer refreshment area	no	no	optional	preferred
Information kiosk - separate facility	no	optional	optional	required
Interpretive displays and markers	preferred	optional	preferred	optional
Memorial Signs	optional	optional	optional	optional
Safety and Security				
Fencing	optional	optional	required	required
Site illumination	no	optional	required	required
Surveillance cameras	no	no	optional	optional

Table 610.2 Level of Development for Roadside Use Facilities

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OPERATION & MAINTENANCE
HERITAGE CORRIDORS PROGRAM (HCP)	Develop 2, 6, & 20 year plans for SRA & RV preservation & improvements. Develop system plan showing existing & future locations.	Member of site selection review team for projects using National Scenic Byways or Heritage Corridors Program funding. Participate on site selection review team, as requested.	Lead SRA Team budget building. Distribute SRA condition checklists and collect statewide data. Coordinate OSC site visits. Coordinate cost benefit analysis of projects.	Ensure project scoping consistent with SRA Team identified projects. Monitor project schedule & costs. Make recommendations regarding scheduling or cost adjustments.	Ensure partnership facility location consistent with long term plans. Provide technical assistance to regions on partnership development.	Review design to ensure consistency with project scope and budget intent.	Refer to the Construction Coordination matrix in the Appendix. Ensure traveler information kiosks meet vendor dimensions and display needs.	Refer to the Operation & Maintenance Manual and the Construction Manual.

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OPERATION & MAINTENANCE
SAFETY REST AREA (SRA) TEAM an inter-disciplinary team with OSC & regional representation	Provide input regarding prioritization of projects and needs for long term planning.	Regional representatives provide updates on site selection at SRA Team meetings.	Regional reps. coordinate condition check lists. Gather use projections. Provide cost estimates. Prioritize preservation & improvement projects for each biennium. Provide project alternatives.	Inform SRA Team of condition or cost changes which might impact project priority or programming needs. Assist HCP and Program Management with recommendations, as requested.	Regional representatives provide updates on partnerships at SRA Team meetings.	Assist in coordinating timely routing of design materials between OSC and within region.	Provide updates on construction status at SRA Team meetings.	Provide updates on operational maintenance issues state natural resources team meetings.

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OF M.
PROGRAM MANAGEMENT	OSC solicits cost estimates for long term plans from the region's program managers.	Verify availability of funding.	Regional program management utilize on-call consultants to develop cost estimates for preservation & improvement, waste-water, & water system projects. Develop RV project cost estimates. Develop cost estimates for remaining project types.	OSC Program Management schedules all projects according to prioritization & adjusts as needed. The region's Program Managers program individual projects by OSC priority & established work orders.	Adjust programming to reflect partnership contributions as needed.	Verify availability of funding.	Verify availability of funding.	N/
PROJECT DEVELOPMENT	Ensure consistency between SRA System Plan and Highway System Plan.	Lead inter-disciplinary site selection review team in consensus based selection of sites for new safety rest area development	Provide historical costs for budget development. Develop Highway System Plan estimates including stormwater.	Provide estimates for site - all but sewer and water	Region leads in developing partnerships and coordinates with HCP on potential partnerships. Consult Attorney General early in process of developing partnerships.	Assist in providing critical expertise. Lead for roadway geometrics (preliminary design only required prior to site acquisition).	Coordinate construction inspection.	N/

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OF M.
LANDSCAPE ARCHITECT	Provide technical assistance related to visual continuity and future SRA site location or expansion.	Member of Site Selection Review Team.	Participate in SRA Team budget development process. Assist Program Managers with cost estimates for site development.	N/A	Participate in partnership design layout of joint facilities.	Develop site plans, incl. vegetative removal, to locate building, parking, & utilities. Review building and utility layout.	OSC or Region assists with inspection during construction to ensure landscape design specifications are met.	Pr tec as: M O l dis topl
ARCHITECT	Assist in phasing building and structure concepts for long term plan.	Member of Site Selection Review Team.	Provide cost estimates for buildings. Provide building alternatives. Inspect and verify conditions prioritized by condition check list ratings.	N/A	Participate in partnership design layout of joint facilities.	Design buildings & their layout. Review building designs developed with team members.	Observe building construction.	Pr re; gu op ma rel bu (e. Cc rej rej dis
UTILITIES OFFICE	N/A	Participate in site selection and review process.	N/A	N/A	Provide technical assistance to regions regarding water & wastewater issues.	Provide assistance regarding existing utility location.	N/A	Pr as: wl

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OF M.
OSC MAINTENANCE & OPERATIONS	Assist HCP in identifying long-term water and wastewater issues. Coordinate with HCP for long term impacts to maintenance and operations from new or expanded site development.	Member of Site Selection Review Team where onsite wastewater treatment will be utilized. Determine suitability of a site for RV sanitary disposal facility installation. Participate in Site Selection Review Team.	Participate in SRA Team budget development process. Provide technical expertise for evaluation of water & wastewater needs and priorities. Assist with water & wastewater alternative analysis.	Assist HCP and Program Management with recommendations regarding changes in programming.	Provide technical assistance to regions regarding water & wastewater issues. Participate in discussions related to assignment of maintenance duties and related issues.	Review design of onsite wastewater treatment facilities and water systems for long-term operations and sustainability.	Inspect for compliance with wastewater plans. Inspect water systems.	Id co so ma an pr M an fu O us mc Pr re gu re w w iss

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OPERATIONS
REGION'S MAINTENANCE & OPERATIONS	N/A	Participates in Site Selection Review Team.	Region develops maintenance & operation budget for each site in conjunction with OSC Field Operations.	Review plans and designs, and participate in discussions on impacts of facilities on long-term operations and maintenance budgets.	Participate in discussions related to short and long-term maintenance duties and related issues.	SRA Region involved in design development to incorporate maintenance and operational functions.	Region coordinates with contractor to minimize impact to the traveling public.	Region maintains and operates with regional Voluntary Refueling Program
ENVIRONMENTAL	Identify environmental issues related to long term safety rest area planning. Provide technical assistance related to environmental issues.	Member of Site Selection Review Team; Conduct environmental review on site prior to acquisition. Provide advice regarding final site.	N/A	Assist program managers with cost estimates for environmental mitigations.	Participate in discussions to identify environmental concerns.	Review design to ensure incorporation of environmental mitigation measures.	Review permits as needed.	Provide regulatory guidance on main environmental regulatory

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OPERATION & MAINTENANCE
HYDRAULICS	N/A	Member of Site Selection Review Team.	Assist the region's Program Managers and on-call consultants to identify sewage, water, and stormwater needs upon which cost estimates are based.	N/A	Participate in discussions to identify hydraulic concerns.	Develop or review hydraulic designs.	Provide assistance when needed	Provide assistance when needed
TRAFFIC ENGINEER	NA	Participate in site selection review process.	N/A	Assist program managers with cost estimates for needed mainline improvements	N/A	Review design for traffic issues.	N/A	N/A
TRANSPORTATION DATA OFFICE	Provide HCP with projected traffic counts to assist in prioritizing future safety rest area locations.	Provide Project Development with projected use for potential site locations.	Provide regions with projected use to assist in developing costs estimates for preservation & improvement projects.	N/A	Assist with the determination of future site use, as modified to include partner facilities.	Install permanent and temporary traffic counters when needed.	N/A	Monitor and maintain

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OPERATION
REAL ESTATE SERVICES	Coordinate with HCP on acquisition and disposal of WSDOT real estate suitable for rest area or roadside park development	The region's Real Estate Services is responsible for property acquisition or leases necessary for development of new sites, and for expansion of existing sites beyond R/W and property acquisition for utility installation. Member site selection review team.	Develop project funding estimate. Participate in SRA Team budget development process. Assist region's program managers with cost estimates for property acquisition.	Set up work orders for property acquisition (land and labor)	Assist in determining types of users to consider in partnerships.	Requires sundry site plan for acquisition.	N/A	N/A

FUNCTION OR OFFICE	LONG TERM PLANNING	SITE SELECTION	BUDGET DEVELOPMENT	PROGRAMMING	PARTNERSHIPS	DESIGN	CONSTRUCTION	OPERATION & MAINTENANCE
RV CITIZENS ADVISORY COMMITTEE (a citizens advisory group authorized by legislation)	Provide input regarding prioritization of RV projects and needs for long term planning.	Through HCP, make preferences known for sites which offer the potential of providing RV sanitary disposal facilities.	Recommend prioritized project lists for preservation & improvement budgets. Provide RV's share of sewage system projects including RV facilities. Monitor and recommend expenditure of RV account funding.	N/A	May participate as a funding partner in the development of safety rest area projects which provide opportunity for RV sanitary disposal facilities.	Review site designs for projects which include RV sanitary disposal facilities.	N/A	Through provision of Federal funding, the main operational issue concerning
ECONOMIC PARTNERSHIP OFFICE	N/A	N/A	N/A	N/A	Provide assistance to regions and Heritage Corridors Program staff on partnership issues.	N/A	N/A	N/A

ATTORNEY GENERAL'S OFFICE	Provide advice on legal issues related to future rest area system development.	N/A	N/A	N/A	Advise regions on legal issues related to partnership opportunities.	N/A	N/A	N/A
---------------------------------	--	-----	-----	-----	--	-----	-----	-----

Table 610. 3 Coordination for Safety Rest Area Issues

General

The guidance in this chapter is for providing barrier free movement from a parking area to a building, viewpoint, or shelter such as those found in transit centers, safety rest areas, or viewpoints. For considerations along a highway, such as sidewalks or curb cuts, see the *Design Manual* and *Standard Plan F3*.

The goal of universal access design is to make the transitions encountered in the physical environment as unrestricted as possible. Accessibility problems are often encountered at transitions such as those from street to curb, light to dark, or inside to outside.

Universal access design accommodates access for all generations, from grandparent to grandchild. Nearly 90% of the population will be considered “disabled” at some time in their lifetime. Disabilities may be motor - a broken leg to Multiple Sclerosis; audio - temporary or permanent loss of hearing; visual - temporary or permanent impairment of sight; internal - such as cardiac or respiratory ailments; or anyone of a thousand different maladies affecting today’s population. Eliminating barriers and restrictions, whenever possible, within the public transportation system benefits everyone.

Washington State law does not differentiate between temporary (sprained ankle) and permanent (amputated leg) disabilities.

References

Design Manual, WSDOT, M 22-01

Standard Plans for Road, Bridge, and Municipal Construction, WSDOT, M 21-01.

Accessibility Design for All: An Illustrated Handbook, Washington State Regulations (WAC 51-40), by Barbara L. Allan and Frank C. Moffett, Olympia, Washington: A.I.A. Washington Council, 1998. Provides dimensions and slopes for accessibility in the state of Washington.

Americans with Disabilities Act (ADA): Accessibility Guidelines For Buildings and Facilities, Transportation Facilities, Transportation Vehicles, Architectural and Transportation Barriers Compliance Board, Washington, D.C. (1331 F St., N. W., Suite 1000, Washington DC 20004-1111), 1996. Minimum guidelines for accessibility at the federal level. <http://www.usdoj.gov/crt/ada/adahom1.htm>

28CFR Part ,36 “Nondiscrimination on the Basis of Disability by Public Accommodations and in Commercial Facilities; Final Rule,” *Federal Register*, July 26, 1991.

<http://www.usdoj.gov/crt/ada/reg3a.html>

49 CFR Part 27 “Nondiscrimination on the basis of Handicap in Programs and Activities Receiving or Benefitting from Federal Financial Assistance.

49 CFR Part 37, Subpart C Transportation Facilities

Transportation Equity Act for the 21st Century - Section 1202, Bicycle and Pedestrian Walkways. Establishes eligibility for federal matching funds of at least 80% for audible traffic signals and audible signs at street crossings.

ADA Guide for Small Businesses, U.S. Small Business Administration with the U.S. Department of Justice.

<http://www.usdoj.gov/crt/ada/smbusgd.pdf>

Resources

OSC Office of Equal Opportunity ADA Coordinator

FOSSC Architects

OSC Region Liaison Landscape Architect

Region’s Landscape Architects

Region’s Local Programs Engineers

Region’s Traffic Engineers

Definitions

ADA *Americans with Disabilities Act* 42 U.S.C. 12201

<http://www4.law.cornell.edu/uscode/42/ch126.html#PC126>

accessible route of travel This is defined in the *Washington Administrative Code* (WAC) 51-40 as “a continuous unobstructed path connecting all accessible elements and spaces in an accessible building or facility that can be negotiated by a person using a wheel chair and that is usable by persons with other disabilities.”¹

facility All or any portion of buildings, structures, vehicles, equipment, roads, walks, parking lots, or other real or personal property or interest in such property.²

¹ Accessibility Design for All, p. 6.

² Subpart A, 49 CFR Part 27.

ramp Any directional route of pedestrian travel having a running slope between 2% and 8.3%. Refer to table 620.1.

Planning

All transportation facilities that are designed for pedestrian use (such as park and ride lots, safety rest areas, and viewpoints) are required to be in compliance with the Americans with Disabilities Act. That Act is the minimum standard for access requirements. This does not apply to sidewalks, which must follow the street grade. In planning for pedestrian projects, include the region's Landscape Architect. In regions having no Landscape Architect, include the OSC Region Liaison Landscape Architect.

Design

For specific design requirements refer to *Accessibility Design for All: An Illustrated Handbook*, Washington State Regulations (WAC 51-40).

There are unique elements in each site. Not all areas or elements within a site must be accessible, but the overall facility must meet the accessibility standards found in *Accessibility Design for All*.

For construction of new transportation facilities, sites must have accessible routes of travel connecting site entrances, public building entrances, and accessible site facilities such as drinking fountains and picnic tables.³

For alterations to existing transportation facilities, it is desirable that the primary entrance be accessible. However, when this is not possible the building must have one accessible entrance to areas of primary function that "may serve but shall not pass through kitchens, storage rooms, toilet rooms, bathrooms, closets, or other similar spaces."⁴

Consider all users of the facility. For example:

- Most people who are considered legally blind actually do retain varying degrees of sight. Contrasting or highlighted edge treatments on counters and steps help to visually define the boundaries. Good lighting is also important.
- Color-blindness is also classified as a disability and must be considered when designing.
- Include appropriate lighting. General visibility has a large effect on accessibility situations either by creating impacts or solutions.

³ Accessibility Design for All p. 15.

⁴ Ibid. p. 15.

- Color is an important visual cue.
- Strobe lights and flashing warning devices are helpful to warn deaf or hearing impaired individuals in emergency situations.
- Ramps allow access for wheel chairs, baby strollers, shopping carts, etc.
- Stairs are easier to manage than ramps for people using crutches.
- Lever-type door handles are preferred to knobs by amputees, people afflicted with arthritis or with a broken arm, and people carrying bulky objects.

Many design options can be combined to provide enhanced access.

The following table is an overview of requirements for accessible routes of travel between parking areas and buildings:

• Any slope equal to or less than 2% (1V:50H) is considered level.
• The maximum cross slope is 2%.
• Any ramp over 5% (1V:20H) requires handrails (handrails not required for curb cuts).
• Any ramp over 5% that is higher than 12.7 mm (½") above the adjacent grade requires edge protection.
• The maximum slope for any ramp is 8.3% (1V:12H).
• The maximum rise of any ramp is 0.76 m (30") before a landing is required.
• The minimum size of a landing is 1.52 m ² (5' X 5'). Exceptions can be made where right of way does not permit this.
• Whenever a ramp is wider than 1.5 m (5') wide, the landing shall be as wide as the ramp.
• Landings shall have a maximum slope of 2% in any direction.
• Provide landings in the following situations:
• At the top and bottom of ramps.
• Whenever ramps change direction.
• Provide intermediate ramps where the rise is greater than 30".
• Any abrupt elevation change greater than 12.7 mm (½") requires a ramp.
• Apply a 45 degree bevel to any change of elevation between 6.35 mm and 12.7 mm (¼" and ½"). Rounding does not produce the same ramping effect.

Table 620.1 Americans with Disabilities Act (ADA): It's all in the numbers

Sidewalks along streets and highways will follow the terrain and comply with the *Standard Plans*.

Ensure drainage structures, such as inlets, do not interfere with pedestrian movement. Minimize the size of inlet openings in accessible routes. Refer to *Accessibility for All* for greater detail.

Construction

Minor deviations from the design can create physical barriers for disabled people. Follow the *Standard Specifications for Road, Bridge and Municipal Construction* and ADA requirements. When designs are altered to enhance accessibility, the designer must always be consulted to ensure compatibility with the required design parameters.

During construction inspection, ensure that the top and bottom of ramps are flush with the adjacent landings to provide smooth transitions.

Maintenance

Maintenance personnel are responsible for the ongoing care of universally accessible facilities. Decisions and actions by maintenance personnel have a direct effect on providing universal access.

For example:

- When only one portable toilet is provided at a viewpoint or rest stop, that toilet must be accessible for all. Accessible portable toilets are available from most portable toilet providers.
- Repair of potholes and large cracks, and removal of debris from sidewalks, stairs, etc., are important for maintaining universal access.
- When replacement of site furniture is necessary, work with the Heritage Corridors Program for replacement with accessible furnishings.
- Routine maintenance activities and special projects must be planned so that accessible features are not obstructed without provision for the disabled.
- Snow removal operations in Safety Rest Areas shall not create additional barriers to facility access.

Additional Sources of Information

The following site offers information on audible traffic signals and describes how the blind learn to cross intersections and the difficulties they encounter. <http://www.acb.org/pedestrian/signals.html>

U.S. Architectural and Transportation Barriers Compliance Board
<http://www.access-board.gov/>

George A. Covington, Bruce Hannah, *Access by Design*, New York: Van Nostrand Reinhold. 1997.

Selwin Goldsmith, *Designing for the Disabled: The New Paradigm*, Oxford: Architectural Press, 1997.

Roberta L. Null, PhD with Kenneth F. Cherry, *Universal Design: Creative Solutions for ADA Compliance*, Belmont, CA: Professional Publications, Inc., 1996.

Puget Sound Council of Governments and the Municipality of Metropolitan Seattle. *Transition plan to provide public transportation services accessible to the handicapped in the central Puget Sound region*. 1980.

Washington State Department of Transportation. *Transition Plan for Highway Rest Areas*. 1994. A survey and plan done by consultants Veninga and Salogga to bring the 39 WSDOT Safety Rest Areas into compliance with ADA regulations. This document can be viewed by contacting the OSC Roadside and Site Development Unit or the Heritage Corridors Program. All Safety Rest Areas have been brought into compliance.

General

Topsoil is a biologically active system of minerals, organic matter, air, water, and microorganisms that can take thousands of years to develop. Topsoil nourishes and provides structural support for plant roots and absorbs water. This chapter focuses on topsoil for roadside projects.

Much of the roadside environment is reduced to subsoil at the surface following a typical roadway construction project. A subsoil has little or no organic matter, few pore spaces, and few microorganisms. While the mineral component of soil provides structural support for roads and bridges, climax vegetation cannot grow in this environment, thus we see nitrogen fixing pioneer species like red alder, and exotic plants including Scotch broom and Himalaya blackberry, colonizing construction sites. The resulting community of native and exotic, invasive plants can require costly maintenance and time consuming management. The job of reconstructing a functioning soil community is difficult and costly, and might not be achievable in some areas.

It is necessary to have healthy soil to revegetate a site. Revegetation is necessary to provide slope stabilization, erosion control, biofiltration and infiltration for water quality, screening, local climate modification, habitat, and so forth. Revegetation might also be necessary to meet permit or environmental commitment requirements. As a result, healthy topsoil is an important component of a construction project. Following a project that exposes subsoils, the process of soil development can be hastened by human intervention.

Plant life and water absorption capability require similar soil conditions: loose, friable soil with the right balance of organic matter, microorganisms, and minerals. In contrast, many roadway construction requires highly compacted soils with low organic matter content for stability. WSDOT requires that soils for road foundations are compacted to 95% density. Plants require that soils have a density of less than 80%. This density complication poses a challenge in all phases of roadside revegetation management.

References

Construction Manual, M 41-01

Design Manual, M 22-01

Roadside Classification Plan, M 25-31

Standard Specifications for Road, Bridge and Municipal Construction, M 41-10

Natural Resource Conservation Service. *The Soil Biology Primer*.

<http://www.statlab.iastate.edu/survey/SQI/primer/index.htm>

Resources

The region's Landscape Architect

The region's Environmental Office

Field Operations Service and Support (FOSSC) Materials Lab

Olympia Service Center (OSC) Horticulturist

OSC Roadside and Site Development Unit

Definitions

biosolids Treated wastewater residuals or solids used as a soil amendment.

clay Mineral soil particles with a diameter of less than 0.002 millimeter. A fine-grained soil that has a high plasticity index in relation to liquid limits.¹

climax vegetation Relatively stable vegetation in equilibrium with its environment and with good reproduction of the dominant plants.²

compost Stable, mature, decomposed organic solid waste that is the result of the accelerated, aerobic biodegradation and stabilization under controlled conditions. The result has a uniform, dark, soil-like appearance.

friable readily crumbled

humus Decomposed organic matter that remains once visible plant structure can no longer be determined.

leaching The removal of materials (CaCO₃, MgCO₃, and other more soluble materials) in solution from the soil.

¹ Donahue, Roy L., John C. Shickluna, and Lynn S. Robertson, *Soils: An Introduction to Soils and Plant Growth*, Prentice-Hall, Inc., Englewood Cliffs, New Jersey, 1971, p. 509.

² Ibid, p. 510.

loam A soil texture class that contains 7 to 27 percent clay, 28 to 50 percent silt, and less than 52 percent sand.³

microorganisms Forms of life that are either too small to be seen with the unaided eye, or are barely discernible.⁴

mottling Soils irregularly marked with spots of color. The presence of orange mottling usually indicates soils that have been through periods of saturation interspersed with periods where the soil had dried out.

pioneer species Fast growing plants that are quick to establish on poor soils. Nodules on their roots fix nitrogen giving them a competitive edge in disturbed soil environments.

pore space Total space not occupied by soil particles in a bulk volume of soil, commonly expressed as a percentage.⁵

ripping Deep scarification using specialized equipment, usually done on compacted soils to increase pore space and improve soil structure for plant growth and infiltration of surface water.

sand A mineral soil particle between 0.05 and 2.0 mm in diameter. A soil textural class.⁶

silt A mineral soil separate consisting of particles of 0.002 and 0.05 mm in diameter. A soil textural class.⁷

soil The unconsolidated mineral and organic matter on the surface of the earth that has been subjected to and influenced by genetic and environmental factors of parent material, climate (including moisture and temperature effects), macro and microorganisms, and topography, all acting over a period of time and producing a product – soil – that differs from the material from which it is derived in many physical, chemical, biological, and morphological properties and characteristics.⁸

soil horizons Layers of soil approximately parallel to the land's surface and differing from underlying or overlying layers in physical, chemical, and biological properties or characteristics, such as color, structure, texture, consistency, amount of organic matter, and degree of acidity or alkalinity.⁹. The "O Horizon" is the organic layer. The "A Horizon" is a mineral layer forming at or adjacent to the surface, in which humus is accumulated. The "B Horizon" is a mineral layer comprised of fine grained soils that have been leached.

³ Ibid, p. 536.

⁴ Ibid, p. 538.

⁵ Ibid, p. 546.

⁶ Donahue, et al., p. 550.

⁷ Ibid, p. 552.

⁸ Ibid, p. 553.

⁹ Ibid, p. 558.

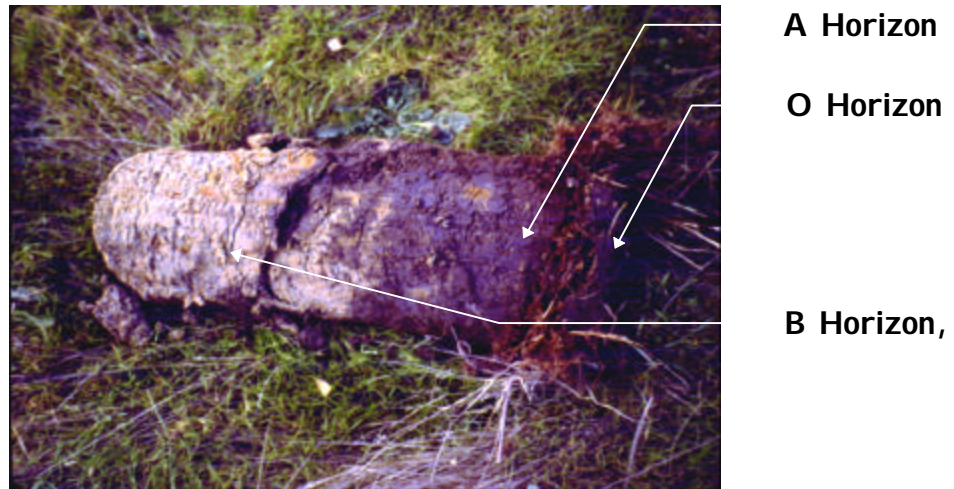


Figure 700.1 Soil Horizons

soil organic matter The fraction of the soil that includes plant and animal residues at various stages of decomposition, cells and tissues of soil organisms, and substances synthesized by soil organisms.¹⁰

soil structure The combination or arrangement of primary soil particles into secondary particles or units. The secondary units are characterized and classified on the basis of size, shape, and degree of distinctness into classes, types, and grades respectively. Examples are: platy, prismatic, columnar, blocky, granular, and crumb.¹¹

subsoil The soil layers below the A Horizon that contain little or no organic matter.

tilth The physical condition of soil as related to its ease of tillage, fitness as a seedbed, and ease of seedling emergence and root penetration.¹²

topsoil The original or present, dark-colored (A Horizon), upper soil that ranges from a few millimeters to a meter thick at different locations.¹³

unsuitable soils Generally organic soils that are not appropriate for engineering functions. These soils might be ideal for roadside restoration and revegetation functions.

¹⁰ Ibid, p. 561.

¹¹ Ibid, p. 561.

¹² Ibid, p. 570.

¹³ Ibid, p. 570.

Structure and Disturbance

The ideal soil for most plants is approximately 50% solid and 50% pore space. The solid component contains minerals and organic matter. Ideally, pore space contains roughly equal parts of air and water. Microorganisms (such as fungi) or invertebrates (such as earthworms) are present in a healthy soil and function to process organic matter, recycle nutrients, and nurture plants.

Any disturbance to the soil alters and influences this complex system. Disturbances include construction, fertilizer and pesticide application, soil compaction from foot traffic and equipment use, and altering hydrological patterns through irrigation, grade changes, and stormwater retention. In other words, any management activity on the roadside is a potential disturbance to the soil system. In areas where plant cover is desirable, roadside management activities are selected and timed to minimize harmful disturbances to the soil, and are focused on long-term soil health.

Soil preservation and preparation are necessary to support goals of the [Roadside Classification Plan \(RCP\)](#).

The following table lists recommended practices for dealing with soils along the roadside.

During the project definition process, determine how and to what extent soils will be affected. Document in the Design File.
Minimize the extent of disturbance activities to minimize impacts to soil outside the project's construction limits.
Before beginning any earth work that includes disruption of the soil, note whether the soils in this area are part of a fill slope comprising the roadway prism. If so, work with the Regional Materials Engineer.
Mitigate construction-related soil compaction in vegetation restoration areas.
Stockpile and reuse native soils where practical.
Minimize erosion potential and weed species invasion by establishing a healthy plant cover.
Maintain roadside management zones 2 and 3 to stabilize and improve soil tilth and fertility.

Table 700.1 Summary of Recommended Practices

Soil Amendments

The decision to use a soil amendment depends upon the existing soil and the desired outcome. Some soil amendments might encourage unwanted exotic vegetation, while the combination of other soil amendments with native soils might favor native vegetation. Check with the OSC Horticulturist or the Landscape Architecture Office for recommendations.

Topsoil

Topsoil can be an amendment when it no longer exists on a site. Commercial topsoil generally consists of mineral soils mechanically combined with organic matter. See the [Standard Specifications](#) Division 9 for working descriptions of topsoil.

Remove, stockpile, and replace existing topsoil when appropriate. Existing topsoil can have necessary nutrients, organic matter, and microorganisms. The use of existing topsoil onsite can reduce the costs of disposing of excess excavated material. An examination of the site with an inventory of existing vegetation is necessary prior to determining when to use existing topsoil. This might not be advisable when noxious weeds and their seeds are present. Consult the OSC Horticulturist or the Landscape Architect for assistance.

Imported topsoil can be used to provide a medium for plant growth when native soil has been removed or is highly disturbed.

Compost

Compost is highly decomposed organic matter that is used to add nutrients and improve soil structure for plant growth. Acceptable compost products originate a minimum of 65 percent by volume from recycled plant waste. A maximum of 35 percent by volume of other approved organic waste and/or biosolids may be substituted for recycled plant waste.

Bark or Wood Chip Mulch

Mulch shall be bark or wood chip fiber as described in the [Standard Specifications](#) Division 9. Mulch is used on top of soil and around plants to moderate soil temperature, retain soil moisture, and inhibit weed growth.

Fertilizer

Commercial fertilizers are labeled to document the content's ratio of Nitrogen (N), Phosphorus (P), and Potassium (K) (Usually listed in order: N-P-K). These are the three main elements associated with

plant growth and health. Generally, nitrogen encourages green top growth, while phosphorus and potassium encourage root growth. Fertilizer is applied in various combinations (for example, 20-20-20 or 10-15-5), as determined to be necessary by the results of a soil analysis.

Mycorrhizae

Mycorrhizae are a group of fibrous fungi existing naturally in topsoils that engulf soil particles and pore spaces to absorb water and nutrients in solution and transfer this solution to the roots of plants. In effect, they multiply the plants' root systems many times.

Additional benefits from mycorrhizae may include plant species diversity and improved soil structure. The mycorrhizae applied depend on the species of plant. Check with the Horticulturist or Landscape Architect for assistance.

Structural Soils

The Urban Horticulture Institute at Cornell University has developed a cost effective structural soil mix that can improve the survivability of street trees in urban environments. This mix might be useful in selected WSDOT projects. The mix is:

- 80% angular stones
- 20% soil
- 30 grams of water storing polymers are added per 100 kilograms of stone

The angular stones form a skeleton that provides the weight-holding capability for the mix. Specialized compaction tests are not needed with this mix. The water storing polymers bind the stones together and stabilize the soil mix. In addition, this structural soil mix leaves a large volume of rooting space that allows the plants to get oxygen and water. See the Regional or OSC Landscape Architects for more information.

Planning

During the planning process designers and engineers are to consider the following:

- Impacts the proposed construction will have on existing soils.
- Treatment needed to provide adequate soils for restoration of roadside character

Procedures

Determine the extent soils will be impacted. This analysis is performed at the earliest phase of the project. This knowledge will be used to complement design and construction. Consider:

- How the proposed project will affect the existing soil.
- Existing soil compaction and compaction ratios resulting from construction activities.
- Measures to mitigate overly compacted soils, such as ripping the soil.
- Expected treatment levels and soil preparation to accomplish those levels; for example, soil amendments and mulch.

Design

Activities during the design phase include:

- Soil preservation — plan to stockpile and redistribute existing topsoil within the contract's order of work.
 - Site analysis. Prepare a plant inventory to document predevelopment conditions.
 - Consult with the OSC Horticulturist prior to considering stockpiling topsoil.
 - Cost savings can be realized by using soils unsuitable for engineering uses (those with high organic content) on roadside projects.
- Determine where to stockpile soil on site.
- Determination of the extent of cut and fill slopes and clearing and grubbing limits.
- Soil analysis (type, compaction, and fertility).
- Specifying topsoil and amendments.

- Matching proposed vegetation with the soil, climate, hydrology, and anticipated maintenance levels.

The challenge to the roadside designer is to specify the appropriate soil preparation for planting, to prevent soil erosion, and to achieve desired soil structure. Appropriate soil preparation, including possible amendments, is crucial for the success of desirable roadside revegetation.

Procedures

Site Analysis

- Examine proposed planting areas for any apparent drainage problems. Note any underlying characteristics that might affect drainage (hardpan, compacted subsoil, clay layers, and so forth.). Plan to correct deficiencies or plant appropriate species.
- Analyze soil for susceptibility to erosion from stormwater runoff.
- Determine solar exposure of slopes (slope aspect) and its effect on soil and vegetation.
- Conduct a plant inventory or a germination test to determine seed bank to decide if topsoil stockpiling is practical.

Soil Testing

Perform a soil test to determine nutrient content and pH of soil.

- Obtain a soil sample bag or a plastic bag capable of holding approximately one quart of soil
- Select a representative area for your sample. If the soil seems to vary in color and composition within the project area, sample those soils also.
- Dig a hole 300 to 460 mm (12 to 18 inches) deep and set the material to the side. Scrape off a small amount of material from the top to the bottom of the side of the hole and place into plastic bag. Do not include any material taken from the hole initially. Refill the hole with the set aside material.
- Locate the test pit on the site map. If more than one sample is taken from the site, number the test pits to correspond with the samples taken.

- Seal the bag tightly and place in a manila envelope and write all the information on the paper surface: your name, date of sampling, site location, and sample identification (such as test pit #1).
- Fill out Soil Test Form and include it with your sample.
- Box or wrap sample for mailing.
- Send the soil sample to the closest lab listed below.
- Consult with the OSC Horticulturist for specific amendment recommendations when you get test results, if necessary.

Soil testing laboratories for soil chemical properties (call laboratories for forms and pricing information):

Black Laboratories
503 N. Gardner Rd.
Burlington WA 98233
Phone: 360-757-6112

Harris Laboratories, Inc.
621 Rose Street, Box 80837
Lincoln, NE 68501
402-476-2811

Northwest Agricultural Consultants
2545 West Falls
Kennewick, WA 99336
Phone: 509-783-7450

Soil and Plant Laboratory, Inc.
PO Box 1648
Bellevue, WA 98009-1648
Phone: 425-746-6665

The WSDOT Materials Laboratory does soil testing for engineering properties such as soil strength and gradation. The Regional Materials Engineer can help with soils engineering.

Compaction

Appropriate soil treatment is crucial for the success of roadside restoration (including erosion prevention seeding). Analyze the soil for compaction. Pay close attention to areas that have been, or will be, staging areas. These areas will have to be ripped to restore pore spaces between the soil particles. Rip compacted soils, ideally in two directions, to a minimum depth of 460 mm (18 inches) before planting. The roots of most plants are above this depth.

Specify in all contracts that the contractor has the responsibility to restore the soil to a less than 80% density in all staging areas. Higher compaction rates are allowed in areas that are critical for road or structure stability. Include the costs of these procedures as part of the contract. The contract cannot be closed until this step is completed.

Soil compaction can be tested using the bulk density test. Test the soil to a depth of 0.6 m (2 feet). If the density is greater than 80%, take steps to break up the compacted soil. Contact the regional Materials Engineer for assistance.

Clearing and Grubbing

Set clearing and grubbing limits to minimize soil disturbance.

In some areas grubbing is unnecessary. Stumps and root systems may be left in the soil to provide stability. Decomposition of trees varies in time depending upon species and climate. Their decomposition, however, will provide nutrients, organic matter, and habitat for microorganisms.

Plans, Specifications, and Estimate (PS&E)

- Specify soil amendments to achieve revegetation and restoration requirements.
- Specify wide-track construction equipment in contract documents when it is necessary to work in wet soils.
- Where practical, strip topsoil and stockpile for redistribution after completion of rough grading. This is the best source of native seeds but it is also a source of exotic invasive vegetation and noxious weeds. (The plant inventory and germination test performed during the site analysis determined what plants are growing in the soil.)
- Assess the entire project for other places to use removed topsoil. Restoration sites are practical locations to place excess topsoil.

Soil Treatment to Enhance Native Plant Growth

To encourage native plant species, the following technique can be employed. Incorporate 75 mm (3 inches) of coarse bark mulch or wood chips into the top 250 mm (10 inches) of soil. Cover with 25 mm (1 inch) of compost. Over the compost, place 50 mm (2 inches) of bark or wood chip mulch. Plant through these layers. This is shown in Figure 700.2.

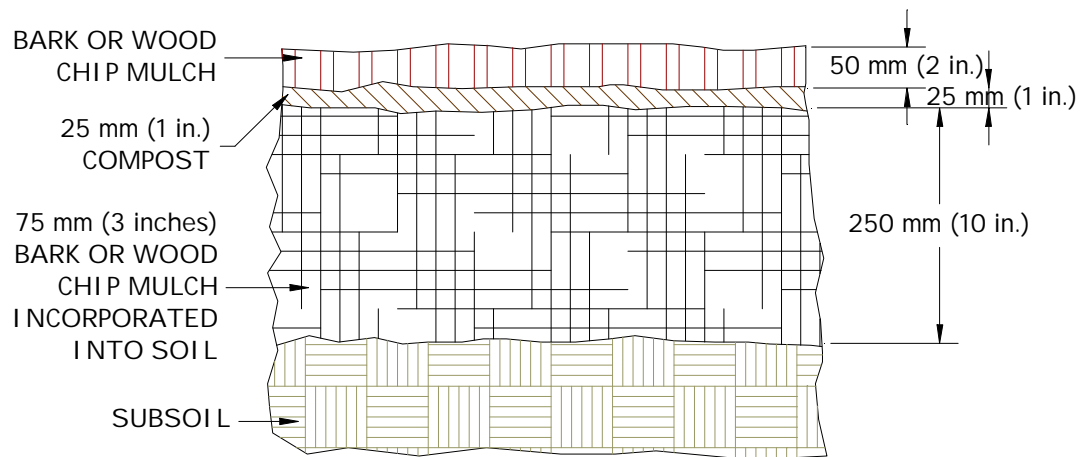


Figure 700.2 Amendments to encourage native plants

Construction

The challenge to the Project Manager and the Construction Office is to avoid or minimize damage to the soils resulting from construction activities. Mitigate unavoidable damage to the soil before planting.

Procedures

The following procedures will minimized impacts to topsoil during construction:

- Set limits of work areas for vehicles and equipment to minimize and prevent excessive soil compaction. Use flagging and fencing in conjunction with signs to define work areas. Stipulate in the contract that the contractor is to avoid or minimize impacts to soil outside the work area limits.
- Minimize compaction during construction. Avoid heavy machinery use on saturated soil.
- Use wide-track construction equipment.
- Cover staging areas with a 150 mm (6 inch) layer of bark mulch or wood chips to reduce compaction.
- Before specifying or beginning earth work that includes scarifying the soil, note and document the soils' structural function and performance. This is particularly critical on fill slopes where the soil is compacted to comprise the highway prism.
- Mitigate construction-related soil compaction in vegetation restoration areas by ripping the soil to loosen its structure.

- When stockpiling topsoil, mound soil no higher than 1.3 m (4 feet) high for less than 1 year. Cover to prevent soil erosion.
- Use only well composted soil amendments and incorporate them as specified.
- Avoid walking, operating equipment or driving vehicles on planting areas after soil preparation is complete.
- Minimize erosion potential by establishing a healthy plant cover.

Maintenance

Maintenance activities can greatly affect soil structure in a positive or negative way. A solid plant cover is the best defense against erosion and invasive species. Routine maintenance activities can help build the soil to support vigorous plant growth.

Procedures

- Plants suffer from nutrient deficiencies in the soil. Contact the OSC Horticulturist for recommendations before amending soil. The Horticulturist can provide information on appropriate fertilizers or soil amendments.
- Allow organic matter to remain on the ground where it will not jeopardize safety or visual quality. Logs and brushpiles enrich the soil and provide habitat while decomposing. Such decomposition can reduce the need for additional fertilization or soil amendments and reduce maintenance expenditures.
- Fresh wood chips can use up available nitrogen and affect plant growth. To avoid this problem, spread wood chips thinly over a large area or add nitrogen to aid in decomposition.
- Avoid driving vehicles or operating equipment on saturated soil and in vegetated areas.
- Reseed, cover, or mulch bare soils as soon as possible when they have been exposed by maintenance activities or errant vehicles.

Erosion Prevention and Sediment Control

General

Erosion is a natural process that can be greatly accelerated by human activities, especially those that change or remove vegetation or that disturb the soil. In addition to human activities, fire and animal activities can also accelerate erosion. Soil is composed of mineral and organic matter and takes thousands of years to develop. The U. S. is losing topsoil seventeen times faster than it develops¹. All construction activities have the potential to cause soil erosion. Therefore, erosion prevention and sediment control are components of any project that disturbs vegetation or soil horizons. Erosion prevention will reduce both the need for costly sediment controls and the risk of environmental damage.

Federal, state, and local water quality regulations prohibit the discharge of turbidity from construction activities into adjacent water bodies and require WSDOT to use approved prevention and control methods. The water quality and stormwater Best Management Practices (BMPs) can be found in the [Highway Runoff Manual](#).

All highway construction projects and any activities involving earthwork require a Temporary Erosion and Sediment Control (TESC) Plan and may require a Stormwater Site Plan (SSP).

Adding any new impervious surface can require that an SSP be included in your project. Check with the regional environmental office and the [Highway Runoff Manual](#) for compliance with the applicable regulations. An SSP includes the permanent and temporary stormwater pollution prevention BMPs and includes the TESC Plan. When the project clears vegetation a NPDES permit might be required. Check with the environmental office to determine area thresholds for permit requirements. The SSP will be used to satisfy the requirements of the NPDES permit. In addition, the SSP will be used to aid acquisition of HPA, Shoreline, and Army Corps of Engineer (ACOE) permits.

References

- [RCW 90.48.080](#) -- Discharge of polluting matters in waters prohibited
- [WAC 173-201A](#) -- Water quality standards for surface waters of the state of Washington
- [Highway Runoff Manual](#), M 31-16, WSDOT

¹ Pimentel, David, "Environment and Economic Costs of Soil Erosion and Conservation Benefits," *Science*, 24 February 1995.

Hydraulics Manual, M 23-03, WSDOT

Standard Specifications for Road, Bridge, and Municipal Construction, M 41-10, WSDOT and APWA. [Metric](#) [English](#)

<http://www.wsdot.wa.gov/eesc/environmental/WQTESC.htm>

Resources

The region's Erosion Prevention Specialist

The region's Water Quality Unit

The region's Environmental Staff

The region's Hydraulics

The region's Landscape Architect

FOSSC Geotechnical Engineers

OSC Horticulturist

OSC Environmental Affairs Office

OSC Erosion Prevention Specialist

OSC Region Liaison Landscape Architect

Definitions

Best Management Practices (BMPs) Physical, structural, and managerial practices that, when used singly or in combination, improve the downstream quality of stormwater and reduce the downstream quantity impacts of stormwater.

bioregion A geographic region based on topography and biological similarities such as watersheds, plant/animal ecosystems, or relative elevations.

check dam A small barrier, such as quarry spalls, sand bags, or silt fencing, that slows water velocity and allows solids to settle out behind the barrier.

detention facility An above or below ground facility, such as a pond or tank, that temporarily stores stormwater runoff and subsequently releases it at a slower rate than it is collected by the drainage facility.

erosion The wearing away of the land surface by running water, wind, ice, or other geological agents, including such processes as gravitational creep. Also detachment and movement of soil or rock fragments by human and animal activities.

erosion prevention and sediment control Any temporary or permanent measures taken to reduce erosion, control siltation and

sedimentation, and ensure that sediment-laden water does not leave a site.

fascine A tied bundle of plant stems or branches, laid in a trench or a terrace on the contour and staked into position. Used to slow water velocities, trap sediment and establish vegetation. Used on basically stable slopes that have a shallow, unstable surface layer.

hydraulic conveyance system Natural and man made drainage facilities that collect, contain, and provide for the flow of surface and stormwater from the highest elevations down to a receiving water body. The natural elements of the conveyance system include swales, and small drainage courses, streams, rivers, lakes, and wetlands. The man made elements of the conveyance system include gutters, ditches, pipes, channels, and most retention/detention facilities.²

retention The process of collecting and holding surface and stormwater runoff with no surface outflow.

retention/detention facility (R/D) A type of drainage facility designed either to hold water for a considerable length of time and then release it by evaporation, plant transpiration, and/or infiltration into the ground; or to hold surface and stormwater runoff for a short period of time and then release it to the surface and stormwater management system.

settleable solids (SS) The materials which settle out of suspension within a defined period (typically one hour). It is reported on a volume basis (milliliter per liter, mL/L), but can also be reported on a weight basis (milligrams per liter, mg/L).

steppe A grass covered semi-arid plain, such as those found in Washington east of the Cascade mountain range.

Stormwater Site Plan (SSP) A plan and report that documents the measures that will be taken during and after project construction to provide temporary erosion and sediment control and permanent stormwater quality and quantity control. The SSP also includes the Hydraulics Report, Vegetation Management Plan, Downstream Analysis Report, as well as other reports. The SSP is required by the Washington State Department of Ecology (Ecology) in order to get a NPDES baseline/general permit. In addition, the SSP will be used to aid acquisition of HPA, Shoreline, and ACOE Permits.

tackifier An amendment, resistant to water, which is added to organic material such as mulch to cause it to adhere to adjacent particles and to the soil.

² Highway Runoff Manual, WSDOT

Temporary Erosion and Sediment Control (TESC) Plan A “living” plan that provides for the prevention, interception, and treatment of all potential turbidity and silt-laden runoff that could occur during clearing, grading, construction, and site stabilization. The TESC Plan describes stabilization and structural practices, both of which are implemented to minimize erosion and the transport of sediments.

Total Suspended Solids (TSS) The entire weight of organic and inorganic particles dispersed in a volume of water, expressed in milligrams per liter (mg/L).

turbidity The visual clarity of the water as measured in Nephelometric Turbidity Units (NTUs). The turbidity, or clarity, of surface streams is an important determinant of its condition and productivity. Turbidity in water is caused by suspended and colloidal matter, such as clay, silt, organic and inorganic matter, and microorganisms. Turbidity does not settle out of water in a reasonable time period. The turbidity of drinking water is less than 1 NTU, while the turbidity of stream water can vary from fewer than 10 NTUs to greater than a few hundred NTUs.

water bars Small logs, or concrete barriers, usually less than 15cm in diameter, placed along a trail or slope to intercept the downhill flow of precipitation and direct it to a desired location.

water quality standards The discharge of polluted waters to waters of the state is a violation of the Washington State Water Pollution Control Law ([RCW 90.48.080](#)). Ecology establishes surface water quality standards ([WAC 173-021A](#)) as required by the Environmental Protection Agency (EPA). These standards are intended to protect surface waters of the state for beneficial uses including: public health, enjoyment, and the propagation and protection of fish, shellfish, and wildlife. State water quality criteria are defined for classifications of waters and include turbidity, fecal coliforms, dissolved oxygen, temperature, and pH. All water discharged from construction sites shall meet the water quality standards for turbidity at the discharge point into the surface water resource. There is not a “dilution” or “mixing zone.”

wattle A length of straw contained in a sausage-shaped netting. These are biodegradable and are generally buried to half their depth along the contour to slow water flow and trap sediment.

Process of Erosion

Gravity is the dominant force in erosion processes. Water, such as rainfall, moves sediment from one location to another. Several factors influence rainfall erosion. For example, storm intensity, storm

duration, soil erodibility, length of slope, steepness of slope, and type and percentage of vegetative cover determine the severity of erosion due to runoff.

Wind erosion is influenced by similar factors. The effects of wind erosion are determined by temperature, rainfall distribution, wind velocity, wind direction, soil texture, particle size, moisture content, surface roughness, height of vegetation, density of vegetation, and the seasonal distribution of vegetation.

Vegetation is the single most important element in the prevention and control of erosion from wind and water.

Maintaining or reestablishing vegetation is fundamental in preventing erosion. Eroding sites require stabilization through the use of measures such as vegetation, check dams to slow water, impervious soil tackifiers and soil particle binders to bind soil particles together, and erosion prevention blankets to reduce the force of water splash on soils. In more extreme cases, walls to decrease slope angle or barriers to block wind may be needed.

Site Analysis

An assessment of an eroded site can provide an indication of the rate of erosion and the scale of soil loss. Proposed construction sites must be analyzed during the planning or design phase. Address the following elements in a comprehensive appraisal of the site:

- Topography.
- Water source, direction of flow, and local depressions.
- Prevailing wind direction.
- Typical rainfall and climate.
- Vegetation present on site and at an appropriate reference site.
- Sensitive areas such as adjacent wetlands or streams.
- General soil type(s).
- Angle and length of slope.
- Type of erosion feature, when present: rills, gullies, bank undercutting, alluvial fans, etc..
- Pre-development stormwater runoff flow.
- Adjacent land use and associated impervious surfaces and runoff.

Erosion Prevention Measures

Erosion prevention measures are used to prevent turbidity and solids from entraining with stormwater. Erosion prevention methods are the only way to prevent turbidity in surface water resources. Project sites require erosion prevention when vegetation is removed, when the soil is disturbed, or when water flow has the potential to cause erosion. All erosion prevention and sediment control BMPs require regular maintenance.

Principles for vegetative erosion prevention include, but are not limited to:

- Minimize the disturbance to desirable vegetation (The less disturbed, the less to stabilize).
- Limit or eliminate the following activities in the area:
 - Soil compaction.
 - Mechanical damage to roots and above-ground vegetation.
 - Alterations to desired hydrological patterns.
 - Deposition or addition of chemicals detrimental to plants or soil environment.
 - Clearing. (If grubbing is not necessary, cut off tops and leave roots.)

The following table gives an overview of recommended erosion prevention practices.

Recommended Erosion Prevention Practices
• Design the Temporary Erosion Control Plan (TESC) for the project.
• Avoid extensive grading and earthwork in erosion prone areas.
• Preserve desirable vegetation whenever reasonable.
• Consider clearing the site in small increments whenever vegetation must be removed. Limit the duration of exposure to erosional processes.
• Install erosion prevention measures prior to any grading activity.
• Install hydraulic conveyance system to handle increased runoff.
• Keep runoff velocities low.
• Divert runoff from steep slopes and bare areas by constructing interceptor drains and berms.
• Divert “clean” water away from disturbed areas.
• Protect cleared areas with mulches and temporary, fast growing herbaceous covers.
• Highly erosional soils, such as clay and silt should be further protected by a cover.
• Inspect and maintain BMPs.
• Understand that erosion control plans and SSPs must be modified to fit the site conditions at any point in time.

Table 710.1 Recommended Erosion Prevention Practices

For more detailed information refer to the [Standard Specifications for Road, Bridge, and Municipal Construction](#). Metric English

Sediment Control Measures

Sediment control measures are needed to control the location of sediment deposition within the project limits. Sediment control BMPs will remove settleable solids but generally will not remove turbidity (which is a water quality standard). Sediment control measures *may* remove turbidity, but only if the detention time is in the order of weeks to months (not minutes to days, which is the usual detention time for ponds, vaults, check dams, silt fence, etc.).

Construct sedimentation BMPs to capture eroded soil as a first order of work. Refer to the [Highway Runoff Manual](#) for these BMPs.

Methods

Vegetation

Vegetation slows or prevents erosion by intercepting rainfall, reducing the impact of raindrops, retaining and retarding runoff volume and velocity, and increasing infiltration and transpiration of water through root and leaf/needle development.

Erosion prevention measures are most likely to succeed when planned as part of the construction process. In much of the roadside environment there is no topsoil after construction. Mulches, water, lime, and/or fertilizers might be required in order to establish vegetation. Use a soil analysis to establish these additional requirements. The OSC Horticulturist can interpret the soil analysis.

If outside the optimum planting seasons, a method of soil cover, other than vegetation, may be necessary. These include mulches and erosion prevention fabrics.

Erosion Prevention Grasses

Establish erosion control grasses to stabilize soils before winter rains (temporary irrigation may be necessary - see the region's Landscape Architect for assistance). See the region's Environmental Specialist, region's Landscape Architect, or OSC Horticulturist for site specific seed mixes. For optimum success, seed within the following time frames:

- In Western Washington: March 1 to May 15 and August 15 to October 1.
- In Eastern Washington: August 15 to November 15.

Long Term Erosion Prevention

Native trees, shrubs, and groundcovers or emergent plants (as appropriate) are used to revegetate disturbed areas as a BMP for long term erosion prevention and sediment control. To restore disturbed areas to continuous vegetative cover, consider the following points in conjunction with the [Highway Runoff Manual](#) Best Management Practices (BMPs):

- Maintain continuous vegetative cover. This might not be possible in the steppe ecosystem, but maximum cover is desirable.

- Leave the soil surface rough and loose after soil preparation and final grading, with ridges and furrows perpendicular to the slope (on contour). This will slow the water's velocity, increase water detention and infiltration, decrease runoff, and promote vegetative growth. (This differs from soil treatment prior to installing a grass lawn.)
- Facilitate bonding of the topsoil with the subsoil. Consider ripping the subsoil prior to placing topsoil. Rough-grade, stair-step, or groove slopes along the contours.

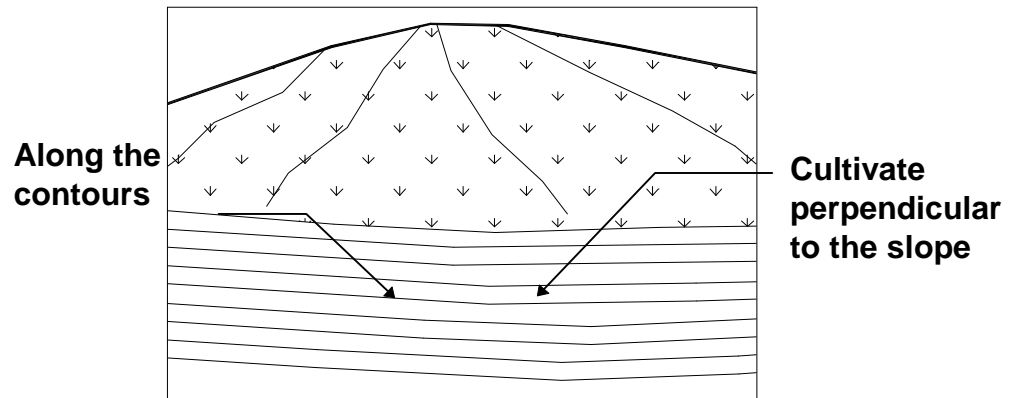


Figure 710.1 Groove Slopes Along Contours

- When applying topsoil, incorporate it several inches deeper than the topsoil layer. This is needed to minimize the formation of a slip plane, eliminates a perched water table, and provides roots a zone of penetration into the existing subsoil. The final surface of the topsoil will be rough in both cases.

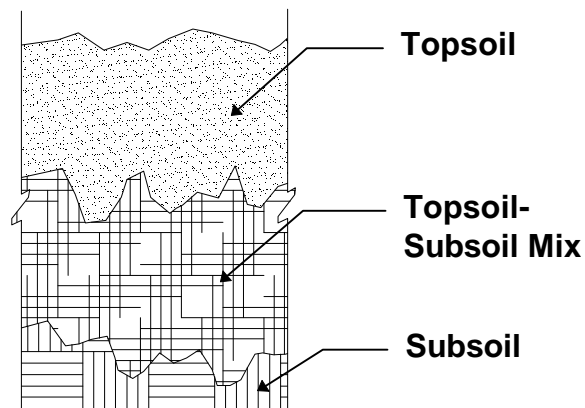


Figure 710.2 Soil Profile After Tilling to Mix Soil Layers

Topsoil can be added on slopes of 1V:2H or less. In some sites, it is better to amend existing soil than to add topsoil. Check with the region's Landscape Architecture Office, the region's Biologist, or the

OSC Horticulturist for soil sampling and additional soil amendment information.



Mulches

Mulches can be used on the surface for temporary erosion prevention and incorporated into the soil to improve the soil environment for establishing vegetation. Organic mulches such as straw, wood fiber, chips, and bark are most effective for these purposes.

An organic tackifier can be added to bind the mulch, seed, and fertilizer to the disturbed soil surface until vegetation is established. These tackifiers can reduce the displacement of soil particles, seeds, and mulch caused by wind or rainfall.

Silt Fence

- Silt fencing is a temporary sediment control measure and must be installed correctly and on contour to be effective. There are numerous types of silt fencing available. Check with the region's Environmental Office or Erosion Prevention Specialist for more information.
- Stronger, more positive controls are desirable for erosion prevention on projects that will overwinter, or where the controls may need to operate with little more than occasional inspection.
- Consider design elements in the project's earthwork and drainage that will allow good construction staging for erosion control methods and use silt fence only as a very short term (90 days) solution to erosion control.
- Bury silt fencing 200 to 300 mm (8 to 12 inches) below the soil surface, backfill the trench, provide wire mesh backing for support, and stake in place. Install on contour. Flair ends to allow ponding of water and sediment. Be sure to check with the local jurisdictional agencies for specific local requirements for silt fence installation.

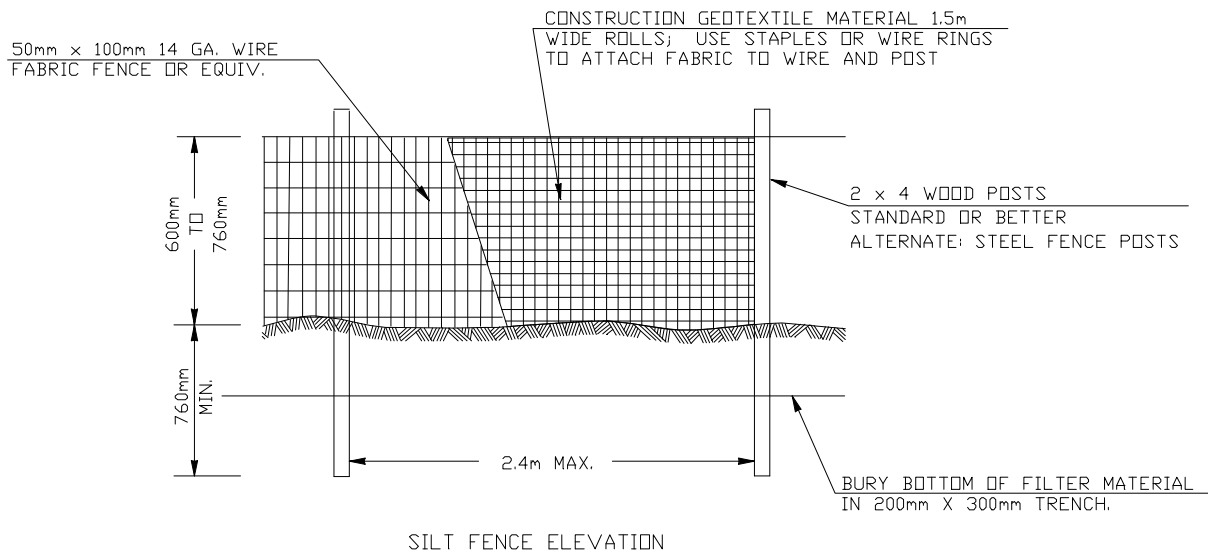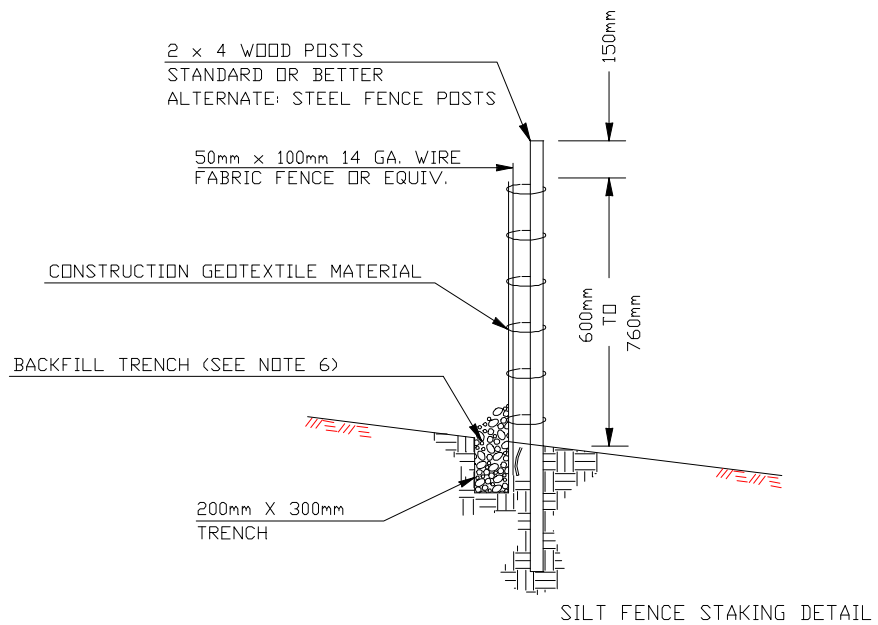

CONSTRUCTION GEOTEXTILE FOR TEMPORARY SILT FENCE

Figure 710.3 Example of silt fence installation

- When silt fencing is needed over an extended construction project, it must be maintained. Soil deposited in front of a silt fence might require removal so that the fence is not over-topped by sediment. Redistribute the accumulated sediment in an appropriate location as directed by the Construction Inspector or the Environmental Coordinator.

Rolled Erosion Prevention Fabrics

Rolled erosion prevention fabrics are available in various materials and strengths depending upon the desired function. These erosion prevention fabrics can be used to cover soil during establishment of vegetation. Some may be left in place, if biodegradable, and will degrade over time when exposed to light. Contact the region's Environmental Office, Hydraulics, the OSC Erosion Prevention Specialist, or the OSC Region Liaison Landscape Architect for aid in calculating the strength and type of material needed for each site.

Erosion prevention fabrics must be installed properly to function well. An anchor trench is typically used and the fabric must be pinned and staked firmly in an overlapped position so that water does not lift the material from below.

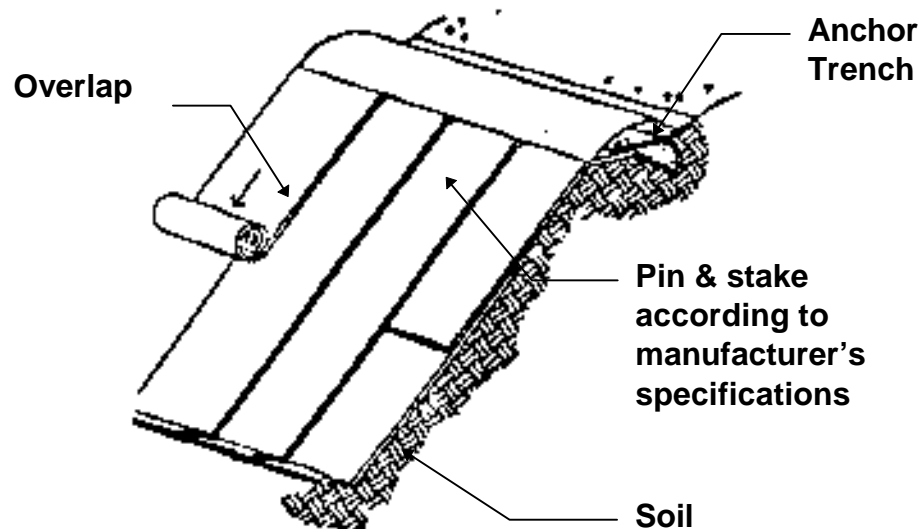


Figure 710.4 Rolled erosion prevention fabric installation

The following table lists types of erosion prevention fabrics. See manufacturers for details.

ROLLED EROSION PREVENTION FABRICS		
<i>PRODUCT</i>	<i>ADVANTAGES</i>	<i>DISADVANTAGES</i>
Erosion Prevention Netting/Mats	More effective than tackifier when properly anchored	<ul style="list-style-type: none"> • Temporary (<1 yr.) and used with dry mulch • More costly than tackifier • Netting might interfere with maintenance if improperly anchored • Wildlife, such as birds, reptiles, and amphibians, might get tangled in the netting
Open Weave Meshes	<ul style="list-style-type: none"> • Low to moderate cost • Moderate sediment yields • Allows moderate vegetative density • Moderate moisture absorption 	<ul style="list-style-type: none"> • Temporary (1-2 years) • Low flows only • Incomplete ground cover
Erosion Prevention Blankets	<ul style="list-style-type: none"> • Low to moderate cost • Easy to install • Good moisture absorption • Very low sediment yield • Allows high vegetative density 	<ul style="list-style-type: none"> • Temporary (1-3 years) • Low to moderate flows • Netting might interfere with maintenance if improperly anchored.
Turf Reinforcing Mats	<ul style="list-style-type: none"> • Moderate costs • Long-term (indefinite) • Moderate to high flows • Encourages infiltration • Allows moderate to high vegetative density • Extends performance limits of vegetation • Flexible - conforms to differential settlement 	<ul style="list-style-type: none"> • Low to moderate sediment yields (unvegetated) • Requires vegetative establishment for effective long-term performance

Table 710.2 Advantages and Disadvantages of Rolled Erosion Prevention Products by Type

Wattles, Water Bars and Fascines

Wattles, water bars and fascines can be used to intercept runoff and to direct water across a slope to a selected location. They are common bioengineering techniques. Imbed and stake wattles, water bars, and fascines into the slope. They may be used in sets or in combination with other erosion prevention and sediment control methods.

Straw Bales

- Never place straw bales in flowing water. Better BMPs to slow water velocity are triangular silt-fence dikes, quarry spalls, sand bags, etc..
- Straw bales are not a preferred method of sediment control. They are often used in combination with temporary silt fencing or sand bags.
- Straw bales are not appropriate for trapping sediment on a slope because the breaks between bales provide locations through which water can flow.

Sandbags

Sandbags can be used as a temporary interceptor to slow water velocity. Sandbags placed across access or interior construction roads provide for a means to divert or slow erosive water flows on a construction site.

Bonded Fiber Matrix

A bonded fiber matrix is a continuous layer of elongated fiber strands held together by a water-resistant bonding agent. When properly applied, it eliminates direct rain drop impact on soil (ideally it has no holes greater than one millimeter in size), allows no gaps between the product and the soil, and it has a high water-holding capacity. A bonded fiber matrix will not form a water-insensitive crust that can inhibit plant growth, and it will biodegrade completely into materials known beneficial to plant growth.

PAM

WSDOT's Water Quality Program is in the process of evaluating polyacrylamide (PAM), an organic polymer flocculant, for its ability to stabilize soils and remove fine suspended sediments from stormwater runoff at highway construction sites.

<http://www.wsdot.wa.gov/eesc/environmental/PAM.htm>

General

Contour grading directs water to a desired point, prevents erosion, provides noise deflection, provides visual fit of the facility into the landscape, and protects desirable vegetation.

Contour grading plans detail the blending of the constructed land form with the surrounding earth forms. Blending the facility into adjacent landforms is Washington State Department of Transportation (WSDOT) policy as stated in the [*Roadside Classification Plan*](#).

References

[*Construction Manual*](#), M 41-01, WSDOT

[*Design Manual*](#), M 22-01, WSDOT

[*Highway Runoff Manual*](#), M 31-16, WSDOT

[*Hydraulics Manual*](#), M 23-03, WSDOT

[*Roadside Classification Plan*](#), M 25-31, WSDOT

Resources

The region's Landscape Architect Office

The region's Materials Engineer

OSC Hydraulics Office

OSC Roadside and Site Development Unit

OSC Geotechnical Branch

Definitions

angle of repose The angle between the horizontal and the maximum slope that a soil assumes through natural processes.

berm The continuous artificial contouring of a slope or water-channel bank.¹

contour An imaginary line on the surface of the earth connecting points of the same elevation.

contour interval The difference in elevation between two contours.²

¹ Hugo Schiechl, *Bioengineering for Land Reclamation and Conservation*, University of Alberta Press, 1980.

cross section The representation of a landform as it would appear if cut by an intersecting plane.

cut That part of the ground surface that, when graded, is lower than the original ground.³

datum In surveying, a reference point, line, or surface for computing or correlating the results of surveys. In surveying, there are two principal types of datums: vertical and horizontal.

elevation Vertical distance of a point above or below a reference surface or datum.⁴

fill That part of the ground surface that, when graded, is higher than the original ground.⁵

finish grading Minor changes to finalize a prepared earth surface to its desired grade.

grading Modification of the ground surface by cuts and/or fills.

interpolation The determination of the elevation of a location between two known points. Done by calculating the slope between known points and using the horizontal distance from the known point to the intermediate point to calculate the elevation of the intermediate point.

profile The representation of a landform seen from the side.

section See *cross-section*.

Contour Grading Plans

WSDOT grading for roadways is represented on plans using cross-sections. Land forms other than the roadway prism are usually represented using contours. Contour grading plans are required for land forms that have irregular variations between cross-sections. They are also used to show fine grading where profiles or cross-sections do not show enough detail. Examples include wetland mitigation sites, retention and detention ponds, noise abatement berms, and interchanges. Contour grading plans are often accompanied by cross-sections or grids for additional clarification. These elements, work together for an improved finished product that reduces the need for interpretation during construction. In addition, minor landform changes can affect sensitive plant and animal ecosystems. For

² Morris M. Thompson, *Maps for America*, U.S. Department of Interior, Geological Survey National Center, Reston, Virginia, 1987.

³ Steven Strom and Kurt Nathan, *Site Engineering for Landscape Architects*, Van Nostrand Reinhold, New York, 1992.

⁴ Thompson, 1987

⁵ Strom and Nathan, 1992.

example, providing for amphibian habitat requires grading plans to be accurate to within a few millimeters (inches) because these species need shallow water depths.

Contour lines graphically connect points of the same elevation in plan view. Contours are separated by a *contour interval* which is the vertical separation between the contour lines. Each contour is separated from the next by that number of vertical units. In the figure below, the contour interval is 10 meters. Depending upon where the lines are drawn, the cross sections appear very different.

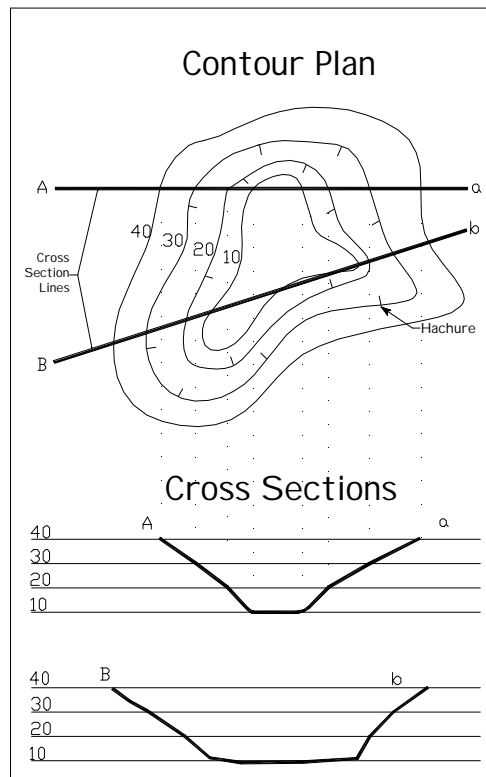


Figure 720.1 Contours

In Figure 720.1, the contour line labeled “40” is exactly 40 units above a known point called a *datum*. Assume that every point on that line is exactly 40 meters above the datum. If this basin was filled with water to the 40 meter contour, the edge of the water would follow the contour line when viewed from above.

On any given plan sheet, contours that are spaced far apart have a gradual degree of slope. In contrast, contours that are spaced close together indicate steeper slopes. It is necessary to read the numbers along the contour lines to determine which direction the ground is

sloped. Hachures are used on the down slope side of contours to depict enclosed concave forms.

The Rules of Contours:

- Existing contours are drawn with dashed lines. Proposed contours are drawn with solid lines.
- Contours never cross.
- Contour lines depict connected points of equal vertical position.
- All contour lines close on themselves (this may be either on or off the plan sheet or map).
- The steepest slope is along a line perpendicular to the contour lines. Water will always flow downhill in a line perpendicular to contour lines.
- Contour lines never merge into one another. However, on a vertical face, such as a retaining wall, they may appear to merge on the plan sheet.
- The greater the detail of the plan, the smaller the contour interval.

Use interpolation to determine the approximate elevation of any point between contour lines. A point half way between the 30 m and 40 m contours, would have an elevation of 35 meters. A point four-tenths of the distance between the 27 m and 28 m contours would have an elevation of 27.4 meters.

A contour plan conveys grading information that would otherwise require many cross-sections to convey. For complex roadside grading, cross-sections used alone do not provide adequate information to ensure that the design intent is being met. It is for this reason that most roadside grading is depicted in a contour grading plan format. When cross-sections are used in conjunction with a contour grading plan they represent the condition only at the location of the cross-section line.

Cross-sections are used differently when they are intended to show a typical condition. For example, on a linear facility with a center line (such as a roadway), cross-sections are often used to represent a typical condition between two stations. Make the intention clear on the plan sheet.

Contour Design


There are many, often competing elements that require consideration in the design phase. Routes that are designated scenic highways might have

a Corridor Management Plan. Review and consider the Corridor Management Plan to identify any considerations, such as visual appearance or buffers, that might need to be factored in to the design.

Consider the following factors when developing a contour grading plan and associated cross-sections:

- The intent of the plan when choosing contour intervals.
- Drainage (including detention and retention functions).
- Balancing of cut and fill within project limits, if possible. It might be possible to create a berm to use excavated material from that project.
- Maximum allowable cut or fill next to a structure (minimum cover over a footing, maximum fill behind a wall or next to a pier).
- Vehicle recovery areas.
- Sight distance.
- Pedestrian safety and security.
- Impacts to groundwater and surface water both on and off the right of way, including wetlands.
- Preservation of existing desirable vegetation.
- Preservation of existing topsoil.
- Slope angle and potential soil erosion.
- Soil properties and angle of repose.
- Consider fencing detention and retention ponds if banks are equal to, or steeper than, 1:3 (V:H) and public access is likely. See the [*Highway Runoff Manual*](#) for more information on wet ponds such as detention and retention ponds.

Slope rounding. For design details on slope rounding, see [Standard Plans, number H8](#).

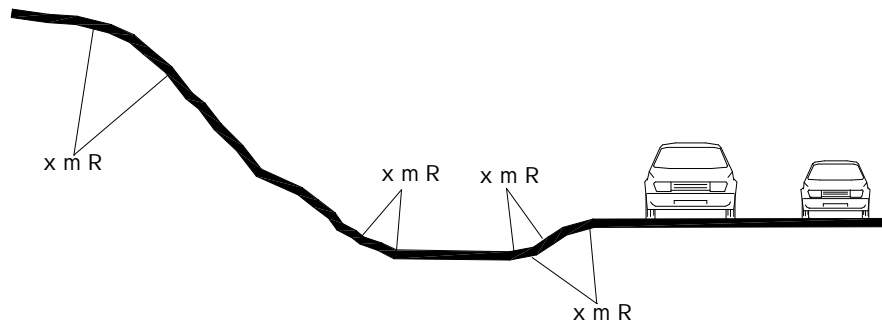

"x m R" represents the meter radius needed to meet the design intent and blend into surrounding landforms.

Figure 720.2 Slope Rounding

- Fit of the graded area into the surrounding landscape for corridor continuity.
- Visual factors (a form that blends with the adjacent landforms).
- Cost of grading.
- Slopes steeper than 1V:2H may be difficult to stabilize and establish vegetation on.
- Maintenance access to drainage and traffic operational features.
- Access along fence line or noise walls, if necessary.
- For areas that are to be mowed, design slopes to be no steeper than 1V:3H.

The region's Materials Engineer or OSC Geotechnical Branch can evaluate the stability of cut and fill slopes, help determine the groundwater regime, and determine the permeability of soils. Contact the region's Materials Engineer early in the design phase to allow for groundwater and soil engineering properties testing, as appropriate. See the [Design Manual](#) for guidelines.

Construction

The use of the grid method or station and offset method is useful in transferring grading information from the plans to locations in the field.

Grids

To simplify staking during construction, a grid can be laid over the contour grading plan as seen in the simplified figure below.

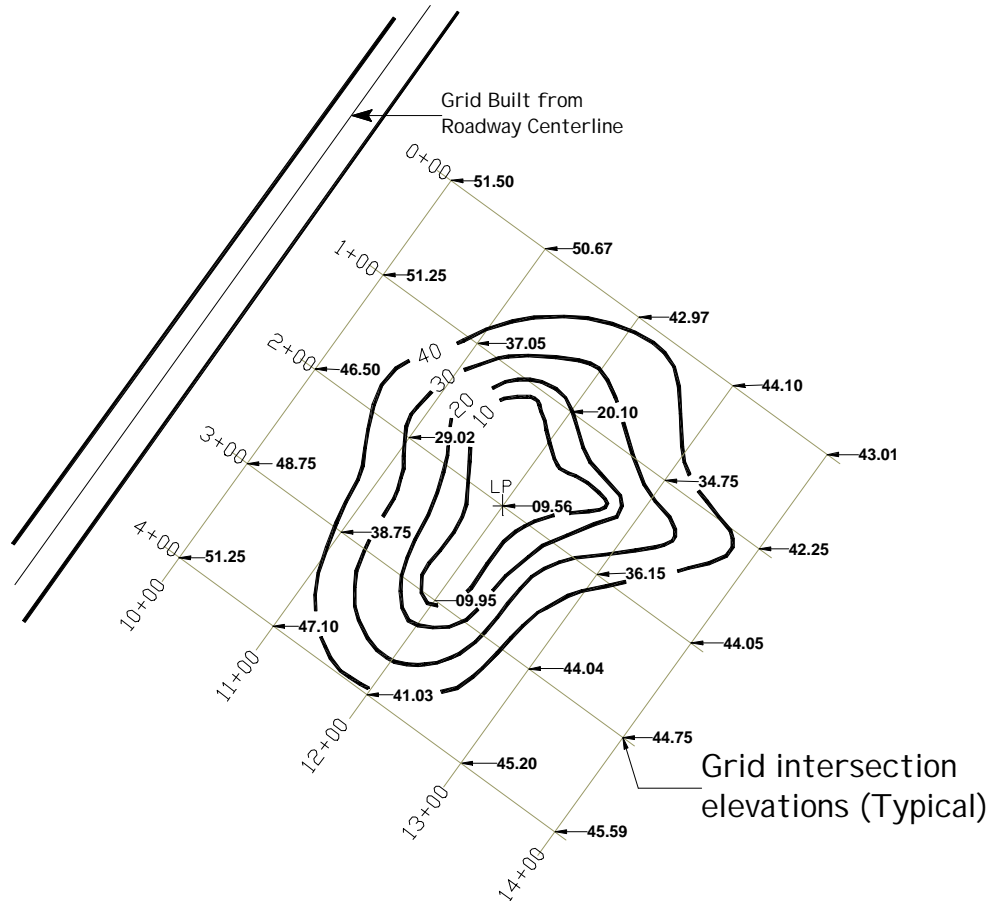


Figure 720.3 The Grid

The grid size will be related to the size of the site and the complexity of the design contours. Make sure that enough grid points are used to reflect the contours as shown on the plan. Ensure that high and low spot elevations are located.

The grid is tied to a known base line and station point such as a roadway center line, a fence, or a right of way line. Elevations at the grid intersections can then be determined by interpolation. Mark the elevation at all grid intersections. Contours and spot elevations can then be staked in the field using the elevations shown on the plans.

Station & Offset Method

The station and offset method is an alternative to the grid method for locating contours in the field.

- Define the base line either by extending a known center line or by drawing a line between two known survey points.
- Identify lines perpendicular to the base line at station points to measure the distance of control points from the base line.
- If available, use a data collector with a “Roading” module to set stakes in the field. With proper survey techniques, elevations will be determined at the location of the station and the offset. By comparing the elevation with the contour, a cut or fill can be marked on the stake.

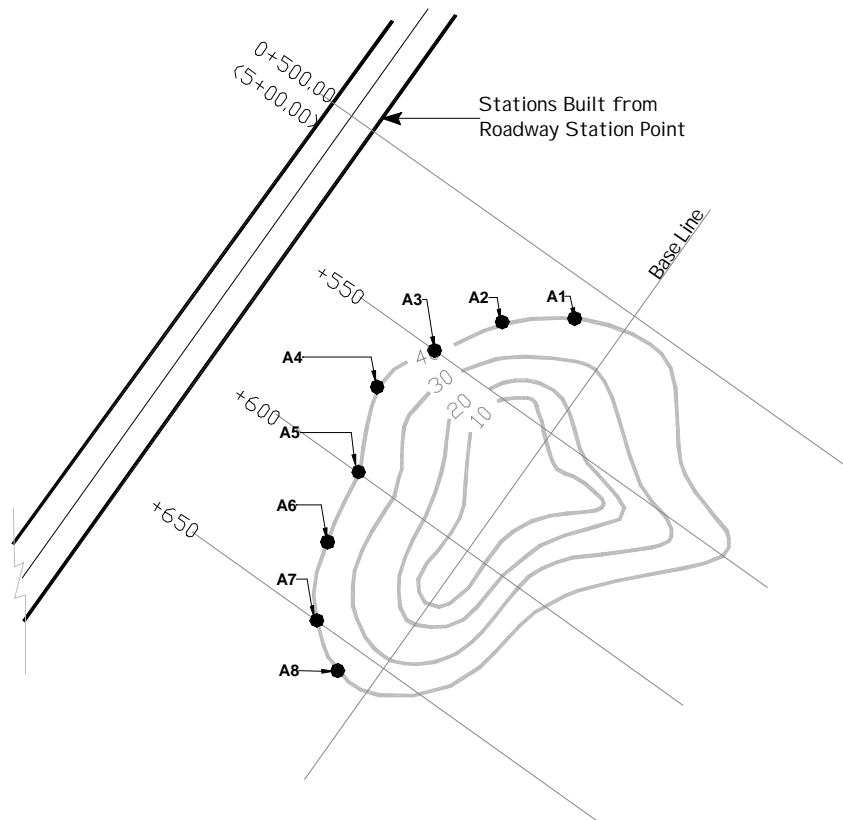


Figure 720.4 Baseline, Stations, and Offset Points

A table showing the location of the control points, as in Tables 720.5 and 720.6, is an integral part of this method. Right or left direction of offset is determined by the direction of increasing stations.

Station	Station Point	Offset (m)
A1	0+511.80	15.70 Rt
A2	0+527.90	35.27 Rt
A3	0+550.00	49.35 Rt
A4	0+570.82	57.46 Rt
A5	0+600.00	45.23 Rt
A6	0+626.47	40.77 Rt
A7	0+700.00	29.00 Rt
A8	0+719.24	12.00 Rt

Table 720.1 Metric Station & Offset Table

Station	Station Point	Offset (ft)
A1	5+11.80	51.51 Rt
A2	5+27.90	115.72 Rt
A3	5+50.00	161.91 Rt
A4	5+70.82	188.52 Rt
A5	6+00.00	148.39 Rt
A6	6+26.47	133.76 Rt
A7	7+00.00	95.14 Rt
A8	7+19.24	39.37 Rt

Table 720.2 English Station & Offset Table

As with all contour grading plans, the plan sheet is accompanied by cross-sections. Include notes stating that grading between cross-sections will be as shown on the plan. Discuss this with the contractor at the preconstruction meeting. The slope can also be labeled on the cross-section.

Cross-Sections

When cross-sections are included in a contract set, it is important to confirm whether they represent a typical condition or the condition only at a specific location. Generally, when cross-sections are used in conjunction with a contour grading plan they represent the condition only at the location of the cross-section line. Cross-sections that represent a typical condition are usually labeled as “Typical” or are labeled for “Sta ____ to Sta ____.”

Compaction

Soil compaction hinders plant growth and infiltration of water. The possibility of soil compaction exists when large equipment is grading a site. Soil compaction can be minimized by:

- Working when soils are not saturated.
- Ensuring vehicles have wide tracks or wide wheels (low ground pressure equipment [LGP]).
- Minimizing the passes a vehicle makes over any one area.

Refer to [Chapter 700 in this manual, “Soil and Soil Amendments”](#) for more information.

In some cases, such as in detention pond berms, compaction is desirable. They will fail if not compacted. Slopes can be compacted to prevent surface sloughing. See the soil bioengineering chapter for information on using plants in combination with other materials, such as logs or rock, to stabilize slopes.

Earth Berms

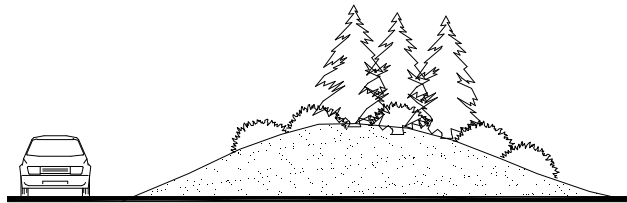


Figure 720.5 Roadside berm example

Berms are used to:

- Visually screen distracting views.
- Provide and enhance corridor continuity.
- Mitigate safety hazards.
- Provide noise abatement either alone or in conjunction with noise walls.
- Waste material from other sites.
- Retain or detain surface water flow.

Materials

Berms can be used to balance cut and fill. However, materials used in the berm must facilitate plant establishment and continued growth. Materials used in berms must allow for the stability of the berm.

The materials used in the berm will determine the angle of the slope. Finer grained materials, such as clays and silts, require a flatter slope for stability.

The use of recycled materials, such as asphalt, has environmental and legal implications. Consult the OSC Construction Materials Engineer when recycled materials are considered.

For details see the Soil and Soil Amendments chapter in this manual, [Chapter 700](#).

When noise walls are constructed on a berm, the materials must be able to support the weight of the noise wall. Consult the Technical Services Unit and the region's Materials Engineer for all berms that are used as a base for noise walls and when deciding whether material is suitable for a berm, as directed in the [Design Manual](#).

For any berm over 3 m (10 ft) high and any berm in conjunction with a detention/retention pond, consult the region's Materials Engineer. For detention/retention pond berms, consult with the Hydraulics engineer. These berms have specific engineering requirements and must meet dam design standards per the Washington State Department of Ecology.

Berm Design

Berms can have variations in grades. When the slope, or grade, changes, the distance between contours on the plan changes as shown in the Figure below.

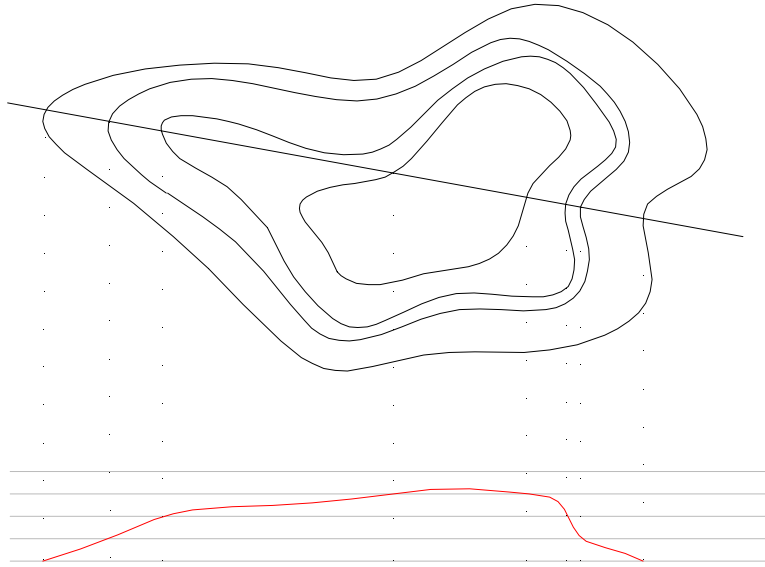


Figure 6 Varying Distances Between Contours

Variations in the distance between contours can make berms appear more natural and blend them into their surroundings.

General

Soil bioengineering is the use of plant material, living or dead, to alleviate environmental problems such as shallow rapid landslides, and eroding slopes and streambanks. In bioengineering systems, plants are an important structural component, not just an aesthetic component. This approach to slope stabilization requires a true partnership between engineering geologists, maintenance personnel, civil engineers, and landscape architects.

Soil bioengineering technology has been practiced for thousands of years. Chinese historians, for example, recorded the use of soil bioengineering techniques for dike repair as early as 28 BC. Construction of the German autobahn system during the 1930s involved extensive applications of soil bioengineering technologies.

Soil bioengineering most often mimics nature by using locally available materials and a minimum of heavy equipment, and can offer roadside managers an inexpensive way to resolve local environmental problems. These techniques can also be used in combination with “hard” engineering techniques such as rock or concrete structures.

Soil bioengineering project areas require periodic monitoring and maintenance until plants have become established.

Benefits of soil bioengineering include:

- Erosion areas often begin small and eventually expand to a size requiring costly traditional engineering solutions. Installation of soil bioengineered systems while problems are small will provide economic savings and minimize potential impacts to the road and adjoining areas.
- Soil bioengineering work is often the only practical alternative on sensitive or steep sites where heavy machinery is not feasible.
- Many designs can be implemented by hand crews.
- Native plant species are usually readily available and adapted to local climate and soil conditions. Costs might be limited to labor for harvesting, handling, and transport to the project site.
- Soil bioengineering projects may be installed during the dormant season of late fall, winter, and early spring. This is the best time to install plants and it often coincides with a time when other construction work is slow.

- Years of monitoring have demonstrated that soil bioengineering systems provide limited initial benefits, but grow stronger with time as vegetation becomes established. Even if plants die, roots and surface organic litter continue to play an important role during reestablishment of other plants.
- Once plants are established, root systems remove excess moisture from the soil profile. This often is the key to long-term soil stability.
- Soil bioengineering provides improved environmental functions, such as slope stabilization, stormwater retention, and habitat values.

References

Design Manual (M 22-01), Soil Bioengineering Chapter.

USDA Natural Resource Conservation Service. Chapter 16, “Streambank and Shoreline Protection,” *Engineering Field Handbook*. United States Department of Agriculture, 1996.

USDA Natural Resource Conservation Service. Chapter 18, “Soil Bioengineering for Upland Slope Protection and Erosion Reduction,” *Engineering Field Handbook*. United States Department of Agriculture, 1992.

H.H. Allen and J.R. Leech. *Bioengineering for Streambank Erosion Control - Report 1, Guidelines*. Technical Report EL-97-8. U.S. Army Engineer Waterways Experimental Station, Vicksburg, MS. 1997. Can be found on the Internet through the following link: <http://www.wes.army.mil/el/wetlands/wlpubs.html>

Resources

The region’s Materials Engineer

Olympia Service Center (OSC) Roadside and Site Development Unit

OSC Materials Lab, Geotechnical Branch, Engineering Geologists and Geotechnical Engineers

The region’s Landscape Architect

State Horticulturist

Definitions

angle of repose the angle between the horizontal and the maximum slope that a soil assumes through natural processes.¹

Approximate Angle of Repose for Soil Texture	
Very wet clay and silt	1 V:3H
Wet clay and silt	1 V:2H
Dry sand and gravel	1 V:1¾
Dry clay	1 V:1½
Moist sand	1 V:1¼

slope gradient the angle of the slope as expressed in a percentage.

soil bioengineering the use of live plant materials and engineering techniques to reinforce soil and stabilize slopes.

Planning

Evaluate soil bioengineering methods as a possible tool for remediation and restoration of degraded slopes. Soil bioengineering has unique attributes, but is not appropriate for all sites. In some cases a conventional vegetative treatment works with less cost, or it may be best to use a geotechnically-engineered system alone or in combination with soil bioengineering.

- Evaluate projects that leave exposed slopes, and slopes requiring high maintenance for stabilization, for possible application of soil bioengineering technologies.
- Include bioengineering technologies as an alternative when evaluating costs.
- Include a slope stability analysis in plans for large erosional slopes.

Design

Landscape Setting and Uses

Consider the natural history and evolution as well as cultural and social uses of the surrounding landscape. An awareness of these factors, and how they shape the present and potential future landscape, is critical for project success.

¹ Robert W. Zolomij. "Vehicular Circulation." *Handbook of Landscape Architecture Construction*. 1975. p. 66.

Knowledge of current and future roadside and land management goals is essential for project success. Consider the natural history, cultural, and social issues of the surrounding landscape as well. A proposed soil bioengineering project within a forested landscape, for example, requires knowledge and understanding of:

- Road construction methods and current maintenance practices.
- Objective of the bioengineering project - repair, remediation, prevention, habitat, etc.
- The area's geologic and glacial history.
- Its propensity for wild fires, wind storms, and floods.
- Occurrence and trends of natural and management related erosion.
- Sequence of vegetation removal and revegetation efforts.
- Fire management history.
- Soil Types and Properties
- Hydraulic and hydrological erosion and scour characteristics.

Trends Within Erosion Sites

Whether erosion occurs naturally or through human-induced activities, a site begins to heal itself immediately upon “failure” by trying to achieve an angle of repose. In mountainous terrain, for example, wood may become embedded in the slope thus terracing eroding soils. Once an angle of repose has been achieved between these natural terraces, vegetation begins to establish. Herbaceous plants usually provide initial vegetative cover on these sites. This initial cover also assists in establishment of soil microorganisms. Typical succession patterns evolve in stages from exposed ground, through herbaceous plant, shrub, pioneer tree, and finally mature tree stages. The first step is to examine and document these trends. Soil bioengineering designs are used to accelerate site recovery by mimicking what is happening naturally.

Site Evaluation and Design Check List

There are many soil bioengineering systems. Selection of the appropriate technique, or techniques, is critical to successful restoration. At a minimum, consider the following:

Climatic Conditions:

Climates near the ground can vary considerably within short distances. South facing valley walls, for example, receive more direct sun rays, which cause higher soil temperatures, increased evaporation, more rapid snowmelt in the spring, and generally drier conditions than on the more shaded north facing walls. This difference will influence erosion rates and the composition and vigor of revegetation efforts.

	Precipitation types, amounts, seasonal variation, and duration.
--	---

	Temperatures, including seasonal averages and extremes.
--	---

Topography and Aspect:

	Slope gradient.
--	-----------------

	Terrain shape (for example, gentle slope to valley or sharp peaks).
--	---

	Elevation of project area.
--	----------------------------

	Direction of sun exposure.
--	----------------------------

Soils

Identify conditions above, below, or within the project site that might have an effect on the project and incorporate these considerations into the design. Consult with the OSC Engineering Geologist to determine need for slope stability analysis. Some categories below will require soil testing to determine.

	Substrate - take soil probe sample from potential site.
--	---

	Soil types
--	------------

	Soil permeability
--	-------------------

	Moisture holding capacity
--	---------------------------

	Nutrient availability
--	-----------------------

Water		
Detailed analysis or work in streams or rivers will require consultation with an hydraulics engineer. Work affecting streams or rivers will require consultation with the regional environmental office.		
		Water velocity: Lateral stream stability
		Hydrologic regime: general and site specific.
		If applicable, stream and fish types affected by the erosion site.
		Location of natural drainage channels and areas of overland flow from road surfaces.
		Areas for safe water diversion.
		Condition of ditch line and culvert inlets and outlets.
Erosion Process		
		Evidence of past sliding: deep or shallow failure surface in vicinity.
		Regional geomorphic trends or slope features (review aerial photos).
		Type of mass wasting or surface erosion feature.
		Source of eroding material: road fill slope, cut slope, landing, etc.
		Trend of site: improving naturally, remaining uniform, or worsening.
Vegetation		
		Plant species and amount growing within and adjacent to project site. It is especially important to identify colonizing species.
		Locations for plant and seed collection.

Plant Materials

Living vegetation is the most critical component of a bioengineered system. Existing vegetation and knowledge of predisturbance plant communities can inform the designer of project limitations, opportunities, and long-term ecological goals.

Work with local native plant experts, the State Horticulturist or the region's Landscape Architect, to select the most appropriate plant species for the project area.

Deciding which plants to use is affected by the following factors:

- Site characteristics (topography, elevation, aspect, soil moisture, nutrient levels).
- Existing vegetation.
- Intended role of vegetation in the project.
- Growth characteristics and ecological relationships of the plants.
- Availability.
- Logistical and economic constraints.

Plants that can resist mechanical stresses of erosion, floods, and landslides, while developing a strong, stabilizing root system are best suited for soil bioengineering applications.



Figure 740.1 Willow Rooting After 6 Week Immersion in Water.

Examples of riparian plants suitable for soil bioengineering work include willow, dogwood, cottonwood, big leaf maple, spruce, cedar, aspen, and alder.

Plants better suited for drier and poorer soil conditions include bitter brush, basin big sage, rubber rabbit brush, snowberry, white pine, lodgepole pine, Douglas maple, oceanspray, and blue elderberry.

The best indicator of which plant materials to consider for the soil bioengineering project are the plants growing on or adjacent to the project site.

Plant materials are chosen from among those species available on the site or nearby. Alternatively, it might be possible to salvage like species from a similar area where vegetation is scheduled to be removed. Logistical concerns are important in the selection of plant material.

A single species may serve the primary structural requirement of the vegetation in a soil bioengineered system. However, it is preferable to use a mixture of species with varying but complementary characteristics. Benefits of using multiple species include:

- Lower susceptibility to devastation by disease or pests.
- Combinations of deep and shallow rooting species and vegetation of varying heights.
- The system is allowed to respond to changes in site conditions.

Construction

Project Planning and Implementation

Coordination & Communication

- Develop and implement a communication plan to keep all players involved, interested, and informed .
- Establish clear project objectives. Have these objectives reviewed and approved by participants including the maintenance personnel and the region' s Landscape Architect.
- List all project phases. Under each phase, catalogue and schedule all work items. For each work item, list the responsible parties and the dates the tasks must be completed. Identify and resolve timing conflicts. Build flexibility into the schedule (the Work Breakdown Structure).
- Ensure coordination between heavy equipment operators and hand crews.

Site Work

- Sites often require earthwork before installing a soil bioengineering system. Resolve timing conflicts that occur between scheduling heavy equipment, hand labor work, plant collection, and use.
- Select the right equipment for the job.
- Identify and remove work hazards.
- Determine access route for people and machinery to minimize site disturbance. For example, limiting hand crews to one entrance and exit route will cause less soil disturbance to the site and adjoining areas.
- Temporarily divert excess water.
- Stockpile excavated soils. Place soil in windrows to allow soil organisms access to oxygen. The least amount of time the soil is stockpiled the better.
- Retain or salvage existing vegetation for later use. Salvage material from healthy, young plants.
- Provide temporary surface erosion and sediment control measures.

Project Work

- Before beginning a project, conduct an on-site meeting. At a minimum, include team members with vegetation, local climate, and soils knowledge.
- Avoid earthwork in saturated soils. When possible, schedule heavy equipment work during periods of low precipitation.
- Round the top edge of a slope failure, which is often a vertical face. For project success, it is critical to address this “initiation point” or persistent source of erosion by removing or rounding off the slope overhang.
- Smooth all eroding areas such as rills or gullies. In addition, prepare a seed bed by slightly roughening the area. Do this by raking across the slope face, not downhill.
- Create terraces when slopes exceed 35 percent. Dig these terraces 250 to 350 mm (10 to 14 inches) deep across the slope face. Horizontal spacing usually varies from 1.2 to 3 m (4 to 10 feet) depending on conditions. The objective is to accelerate establishment of plants by reducing the slope angle of the planted locations.

Inspect project work daily.

Transplant Guidelines

The reason for setting transplant guidelines is to increase the likelihood of plants surviving, growing to maturity, and reproducing. The chance of success is much greater if plants from the same altitude and ecosystem are used because they are adapted to that area's climate and elevation.

Collect plant materials during the dormant season. Keep them protected from wind and heat. Best results are obtained when installation occurs the same day materials are collected. However, some believe greater success can be realized with cuttings if stems are soaked in water 5 days prior to planting. Protecting stems from wind and keeping them cool and moist is essential.

Upland Plant Species

Use local seed (collection) zones to identify the best areas to collect seeds, cuttings, or plants. A seed zone is an area with a defined boundary and altitudinal limits within which landform and climate are sufficiently uniform. The State Horticulturist or Botanist will be the source of information.

In 1966, seed zones were developed, based on climatic and physiographic information, to reduce the risk of maladapting commercial tree species and to provide structure for commercial seed trade. Each zone has geographic boundaries and is additionally divided into 150 m (500-foot) elevation intervals. Seed lots are coded by both seed zone and elevation band.

- When collecting seeds, cuttings, or plants for smaller projects (perhaps a one-time collection) the elevation band can extend approximately 75 m (250 feet) above and below the site.
- Salvage and transplant while plants are dormant.
- Collect cuttings from 30 to 50 parent plants in good condition (if available). In general, take no more than 33 percent of the parent plant's material and take no more than 50 percent of cuttings or seed from a given area.
- For plant cuttings, use young shoots (1 to 2 years old). Older and larger stems tend to have higher mortality.
- Protect cuttings from wind by covering them with plastic sheeting or moist cloth.

Shrubs, Forbs, Grasses, and Riparian Species

Use watershed boundaries as seed, cutting, and plant collection and transplant zones. In addition, collect all plant material within a 150m (500-foot) elevation band of the planting site.

Gene Pool Conservation Guidelines

Making sure the seed lot, cuttings, or plant lots are genetically diverse is just as important as plant movement guidelines. To prevent loss of genes in the population, use a minimum of 30-50 unrelated donor plants. Collecting an equal number of seeds, cuttings, or plants from each donor plant or area will also ensure representation by as many parent plants as possible.

Separate donor plants by sufficient distance to the reduce risk of relatedness.

Planting

- Plant salvaged plants within about 2 hours of lifting. Keep plants moist and free from wind and heat exposure.
- Dig holes 2 times the volume of the root ball. Larger holes will be required in more compacted soils.
- Planting holes must be deep enough so that the downslope side of the rootball is entirely buried.
- Plant the plant so the root collar is at the depth at which it was previously growing.
- Spread roots out so none are kinked or circling. Protect roots, especially fine root hairs on the main root system. Add water, if available, to reduce voids and increase root and soil contact.
- Use on-site soil to backfill the hole. Firmly tamp the soil around the plant. Be careful not to compact the soil.
- Transplanting a microsite: Depending on site conditions and project objectives, it might be preferable to salvage and transplant a small section of ground. This section usually contains several plants with roots, mycorrhizae, seed, soil, soil microorganisms, and duff materials. This technique provides great benefits to the area being revegetated. For transplanting small sections of ground, excavate an area large enough to “plant” the entire piece. Lay it in the excavated area and level with adjoining ground. Use excavated soil to secure edges of transplanted piece. Tap gently into place. Whenever possible, water the transplant.

Seed, Fertilizer, and Mulch



Figure 740.2 Hand-Distribution of Mulch

Broadcast or hydroseed seed, fertilizer, and mulch. Make sure seed is covered with the correct depth of soil. The depth will depend on the type of seed being used. Check with the State Horticulturist for correct planting depths for the seed mix. Decomposed organic amendments, in place of fertilizer, also work well.

It is necessary to protect the site from additional surface waterflow, specifically overland flow from roads. Direct the water flow away from the project area with gravel drains, swales, culverts, or drainpipe.

Weed-free straw or wood cellulose fiber mulches can be used as a mulch to minimize rain splash erosion. When using straw as a mulch, use as thin a layer as possible to cover the soil (less than 6mm [$\frac{1}{4}$ inch]). Grass seed cannot sprout if the mulch is too thick.

Techniques

Details for installation of live facines, live staking, brush layering, brush mattress, live cribwalls, and live gabions can be found at:
<http://www.wsdot.wa.gov/eesc/cae/design/roadside/Bioeng.htm>

Information on erosion control blankets can be found in Chapter 710, Erosion Control, of this manual and on the internet at:
<http://www.wsdot.wa.gov/eesc/environmental/WQTESC.htm>

Live Staking

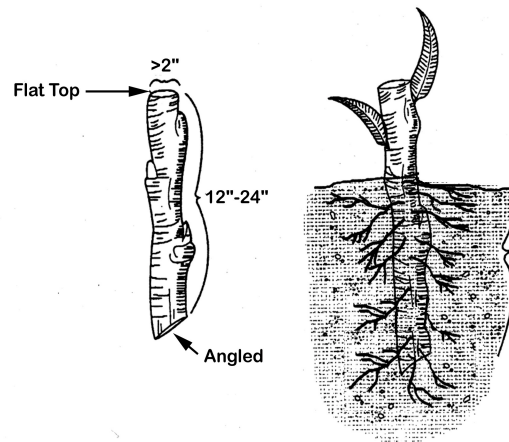


Figure 740.3 Live Staking

Live staking involves insertion and tamping of live, rootable vegetative cuttings (such as willow, cottonwood, and red-osier dogwood). If correctly prepared and placed during early spring, the live stakes will root and grow.

Advantages: A system of stakes creates a living root mat that stabilizes soil by reinforcing and binding soil particles together and by extracting excess soil moisture. This is an appropriate technique for repair of small earth slips and slumps that usually have moist soils.

Disadvantages: Does not solve existing erosion problems (excluding benefits from associated mulch). Staking is not a short-term solution for slope instabilities.

Erosion Control Blanket

Installation of erosion control blankets involves site preparation, trenching, application of grass, and/or forb seed mix and soil amendment, and installation of fabric. This technique is suitable for treating surface erosion areas, especially fill slopes where there is a concentration of surface water runoff. The erosion control blanket provides immediate protection of the soil from erosion. The seed mix will sprout, grow, and lock the underlying soil in place with its root mass.

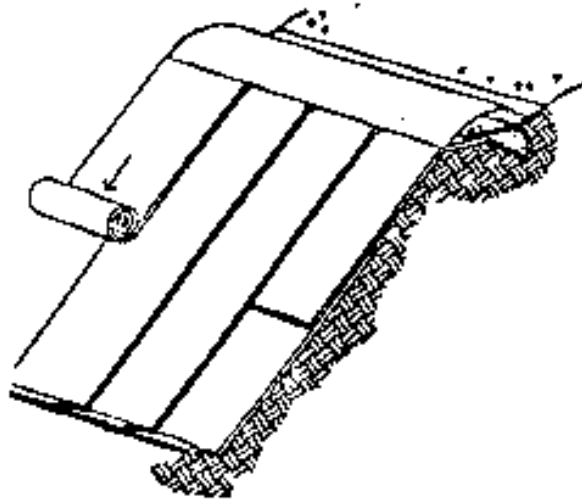


Figure 740.4 Erosion Control Blanket

Advantages: Excellent for mitigating surface erosion. The blanket offers immediate and uniform slope protection from rain and overland water flow.

Disadvantages: Can be labor-intensive and expensive. Could require numerous wood stakes or live stems to secure the erosion control blanket. Too much grass within the blanket will lead to over competition for moisture and high tree and shrub mortality if live stakes are used. If the seeding is too dense, the combined matting of these grasses with the blanket can prevent other grasses from emerging.

Live Cribwalls



Figure 740.5 Live Crib Wall Under Construction

A live cribwall consists of a hollow, box-like interlocking arrangement of untreated log or timber members. The structure is filled with suitable backfill material, such as topsoil, and layers of live branch cuttings, such as willow, which root inside the crib structure and extend into the slope. Tilt the cribwall back into the sloped surface at a 10% angle. Once live cuttings root and become established, subsequent vegetation gradually takes over the structural functions of wood members. Consider the flow of runoff adjacent to the wall to ensure that the wall will not be undermined. Contact the materials engineer for help in calculating slope stress.



Figure 740.6 Live Crib Wall with Willow Stakes

Advantages: Appropriate at the base of a cut or fill slope where a low wall, or log, might be required to stabilize the toe of a slope and reduce slope steepness. Useful where space is limited and a more vertical structure is required. Provides immediate protection from erosion and established vegetation provides long-term stability. Aesthetically more pleasing than gabion baskets.

Disadvantages: Not designed for or intended to resist large, lateral earth stresses. Depending on soil quality of cut slope, may have to use commercial fill material. Can be labor intensive and expensive to construct. Can have high mortality if willow stems are not collected when dormant, are not properly stored, or are mishandled in transfer.

Variation: Toe Log Technique

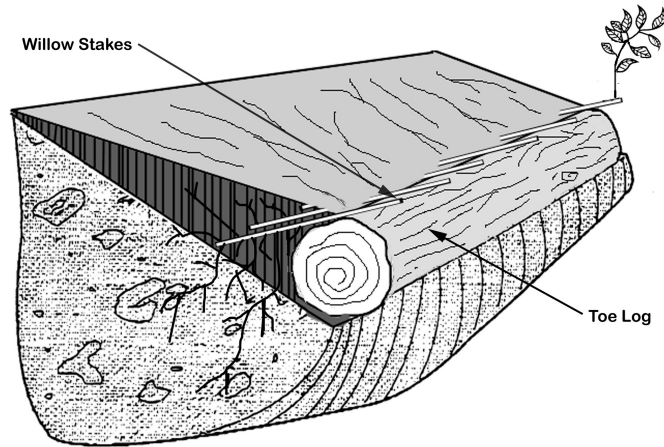


Figure 740.7 Toe Log Technique

This technique is handy for very small cut slope erosion features, for example, 3 m by 4.5 m (10 feet high by 15 feet) wide. Place a 500 mm to 635 mm (20 to 24 inch) diameter log along the base of the erosion site. Lay 1.75 m (5 feet) long and 12.5 mm to 38 mm ($\frac{1}{2}$ to 1½ inch) diameter trimmed, live branches on top of the log and sloping down into the cut bank. The purpose is to take full advantage of excess water at the slope base. Place soil behind the log with soils from the slope face. Toe logging is a quick and effective tool in stabilizing the base of slopes. However, the log must be outside the Design Clear Zone and the site must be small and only slightly oversteepened. It is very important to use the right size log for existing slope conditions. Contact the materials engineer for help in calculating slope stress.

As in any soil bioengineering technique, the initiation point or source of persistent erosion must be addressed. This is usually located at the upper boundary of the site. For project success, it is critical to remove or round off the slope overhang.

Live Fascines

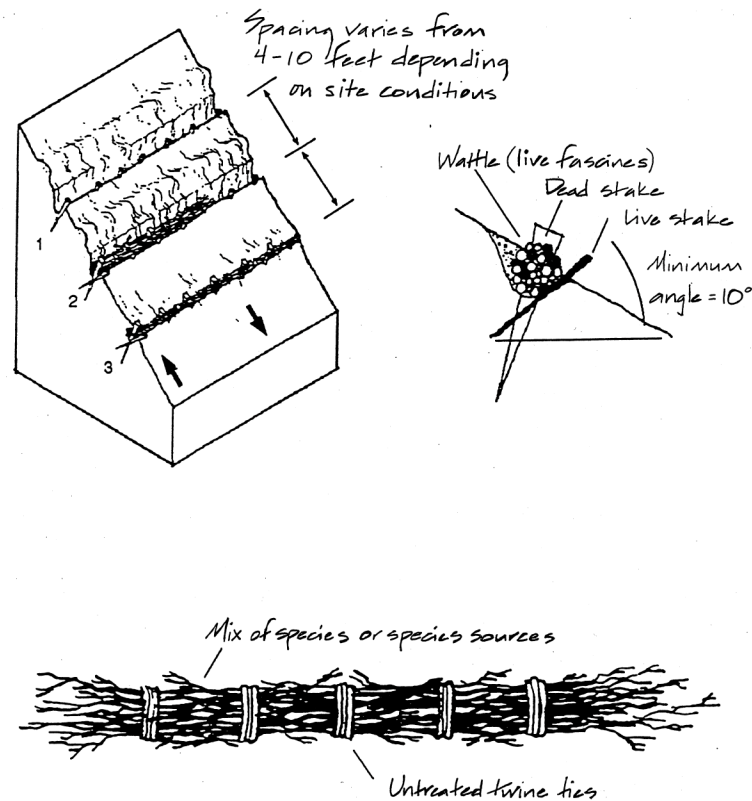


Figure 740.08 Live Fascines

Live fascines are also referred to as contour or willow wattling. They are long bundles of branch cuttings bound together into sausage-like structures that are placed in a trench parallel to the slope contour. Live fascines root into the slope face and provide a permanent structure.

Note: Where soil moisture is not sufficient to support live materials, fascines can also be constructed of plant stems not intended for rooting. The bundle still traps and holds sediments and reduces slope length and steepness between terraces. Plant vegetation between the terraces. As in all projects, recovery is dependent upon successfully establishing live vegetation.

Advantages: Immediately reduces surface erosion or rilling. Suited to steep, rocky slopes where digging is difficult. Capable of trapping and holding soil on the slope face, thus reducing a long slope into a series of shorter steps. Can also be used to manage mild gully erosion and can serve as slope drains when bundles are slightly angled. Best suited for moist soil conditions.

Disadvantages: On steep or long slope lengths, high runoff velocities can undermine fascines. A significant quantity of plant material is required and can dry out if not properly installed. Best suited for riparian, moist soil conditions. Otherwise high plant mortality could occur.

Brushlayering

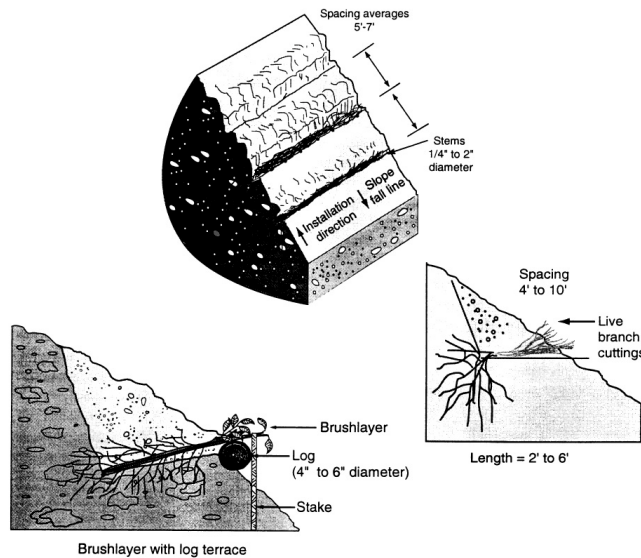


Figure 740.09 Brushlayering

Brushlayering consists of placing live branch cuttings in small terraces excavated into the slope. Terraces can range from 0.6 m to 1 m (2 to 3 feet) wide. This technique is similar to live fascine systems because both involve cutting and placing of live branch cuttings on slopes. The two techniques differ in the orientation of the branches and the depth at which they are placed on the slope. In brushlayering, cuttings are oriented perpendicular to the slope contour. This placement is more effective for soil reinforcement and stability of the slope.

Advantages: Breaks up slope length into a series of shorter slopes separated by rows of brushlayer. Reinforces soil as roots develop thus adding resistance to sliding or shear displacement. Reinforces soil with unrooted branch stems. Provides slope stability and allows vegetative cover to become established. Traps debris on slope. Moderates soil moisture by aiding infiltration on dry sites and drying excessively wet sites.

Disadvantages: Recommended on slopes up to 1V:2H in steepness and not to exceed 4.5 m (15 feet) in vertical height. Labor intensive.

Willow Fencing with Brushlayering

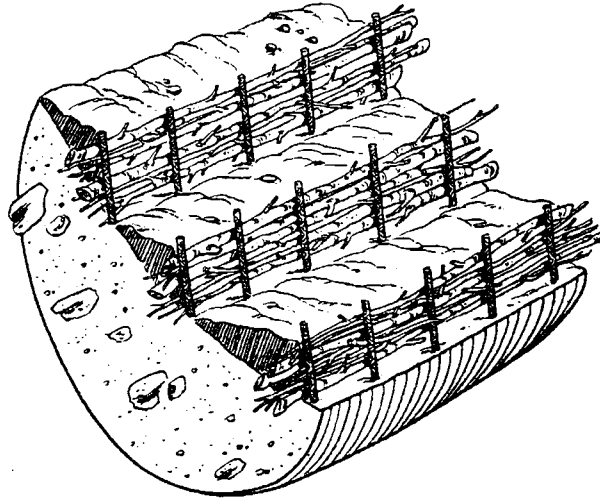


Figure 740.11 Willow fencing with brushlayer

Willow fencing with brushlayering is essentially a short willow fence supporting a brushlayer. Specifically, it is a short retaining wall built of living cuttings with a brushlayer at the base.

Sites where fine-textured soils can provide ample summer moisture, or where seepage of groundwater provides moisture, are suitable for willow/brushlayering fence installations.

These structures can also be constructed on drier sites. However, expect high willow mortality. In these situations, the willow/brushlayer shelf is considered a temporary planting platform. It is important, therefore, to establish deeper rooting shrubs and trees within the shelf.

When the structure begins to decay, root systems of the willows or the other plants will serve as the permanent feature.



Figure 740.10 Willow Fencing With Brushlayer
(brushlayer is hidden below soil from construction).

Advantages: These structures reduce slope angle, providing a stable platform in which vegetation can establish. Willow fences can help to trap rolling rocks and sliding debris and can protect vegetation growing lower on the slope. Willow fences provide support for small translational or rotational failures.

Disadvantages: Significant quantity of plant material is required. Moist site conditions are required for the fence to sprout and grow willows.



Figure 740.12 Leveling Line for the Next Willow Fence

Branchpacking

Branchpacking consists of alternating layers of live branch cuttings and compacted backfill to repair small localized slumps and holes.



Figure 740.13 Branch Packing in Winter

Advantages: As plant tops grow, branchpacking system becomes increasingly effective in retarding runoff and reducing surface erosion. Trapped sediment refills localized slumps or holes while roots spread throughout the backfill and surrounding earth to form a unified mass.

Disadvantage: Not effective in slump areas greater than 1.3 m (4 feet) deep or 1.6 m (5 feet) wide.

Live Gully Repair

Live gully repair uses alternating layers of live branch cuttings and compacted soil to repair small rills and gullies. Similar to branchpacking, this method is more appropriate for repair of rills and gullies.



Figure 740.14 Live Gully Repair

Advantages: Offers immediate reinforcement to compacted soil, reduces velocity of concentrated flow of water, and provides a filter to reduce rill and gully erosion.

Disadvantage: Limited to rills and gullies that are a maximum of 0.6 m (2 feet) wide, 0.3 m (1 foot) deep, and 5 m (15 feet) long.

Vegetated Geotextile

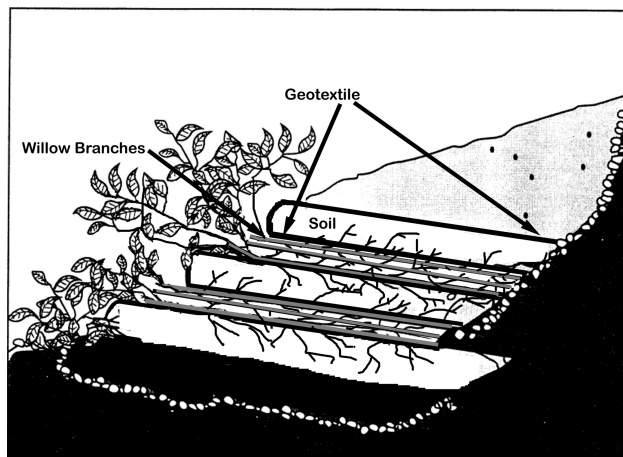


Figure 740.15 Vegetated Geotextile

This method uses synthetic or organic geotextile wrapped around lifts of soil with a mix of live branches placed between layers.

Note: Structural integrity is dependent upon compacted soil layers. Even with mechanized firming, soils support live cuttings.

Advantages: Retards rill and gully erosion and stabilizes fill banks. Is less expensive than other retaining walls such as gabion or Hilfiker baskets.

Disadvantages: Heavy equipment usually required to install lifts. Plants must be installed during their dormant season. Can be expensive.

Log Terracing

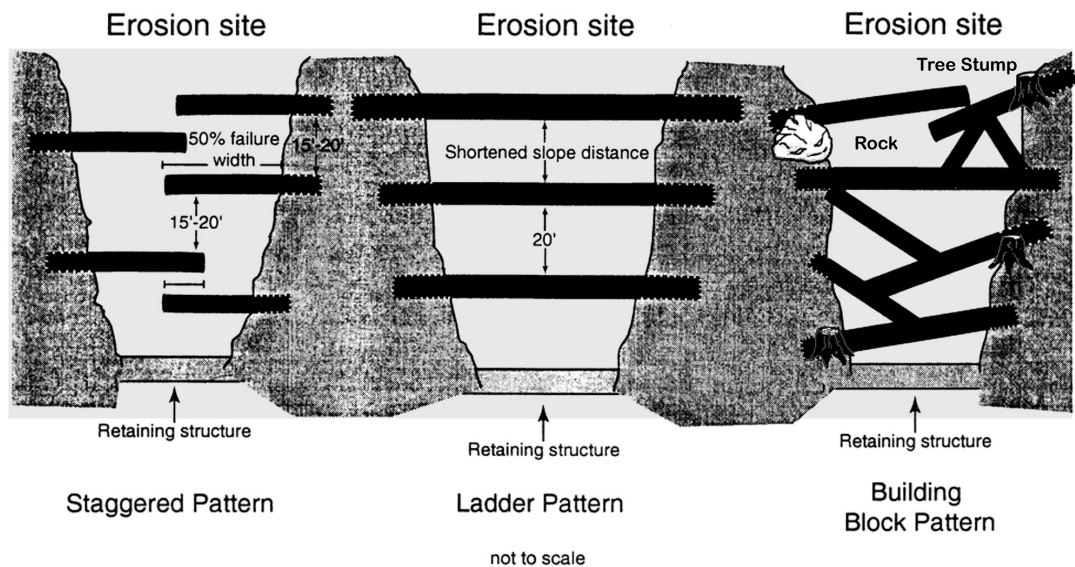


Figure 740.16 Three Toe Log Techniques

The log terracing technique uses alternating terraced logs to stop surface erosion on eroding slopes. Stopping the erosion is critical for successful revegetation efforts. Log terracing shortens the slope length and gradient between each structure, providing stable planting areas throughout most of the slope face. Logs must be installed in trenches and staked into place.

Note: Use logs that are a minimum of 0.3 m (12 inches) in diameter. Logs that are 400 mm to 500 mm (16 to 20 inch) in diameter work best. The most common error in log terracing is using logs that are too small in diameter.

Advantages: Logs create terraces reducing length and steepness of the slope. Provides stable areas for establishment of other vegetation such as trees and shrubs.

Disadvantages: Labor intensive and with possible safety hazards because of the use of logs on a slope. Heavy equipment required to place large logs.

Key Points:

- Involve all associated disciplines early in the process.
- Establish clear project objectives.
- Conduct predesign field review.
- Conduct plan-in-hand field review.
- Have a prework meeting with contractor to highlight key areas.
- Scheduling and timing of project is important when considering erosion outputs.
- When laying out the project, be consistent with the flagging.
- Ensure that terraces are level (on the contours) so that they do not act as stream channels. Level terraces will act to slow erosion.
- Diligent inspections of work-in-progress and timely feedback are critical. Develop a good working relationship with heavy equipment operators and hand crews. Poor inspection and poor communications can ruin a well designed project. Remember “You get what you inspect, not what you expect”!
- Monitor and document project effectiveness.
- Disseminate this information to colleagues and adjust future prescriptions based on monitoring results.
- Annual peer review by land managers provides good feedback and keeps them informed.

The complexity of the project dictates the level at which the aforementioned steps are performed.

An interdisciplinary team is necessary for all steps. The experience can also be very rewarding.

Maintenance

Maintenance crews can request assistance with erosional problems on slopes in their area. The region’s Materials Engineer and the region’s Landscape Architect, or the OSC Roadside and Site Development Unit for regions with no Landscape Architect, are available to help with the design and implementation of soil bioengineering measures to treat erosional slopes or shallow rapid landslides.

For the first one to two summers after construction, additional watering might be necessary. Thereafter, the vegetated system will usually require little or no maintenance and will usually cut down on ditch cleaning requirements because erosion has been minimized.

Additional Sources of Information

D. H. Bache and I. A. MacAskill. *Vegetation in Civil and Landscape Engineering*. London: Granada. 1984.

D. H. Barker, editor. *Vegetation and slopes: Stabilization, protection, and ecology*. New York: Thomas Telford. 1995.

N. J. Coppin and I.G. Richards. *Use of Vegetation in Civil Engineering*. London: Butterworths. 1990.

Donald H. Gray and Andrew T. Leiser. *Biotechnical Slope Protection and Erosion Control*. New York: VanNostrand Reinhold Co. 1982.

Donald H. Gray and Robbin B. Sotir. *Biotechnical and Soil Bioengineering Slope Stabilization: A Practical Guide for Erosion Control*. New York: John Wiley & Sons, Inc. 1996.

E.A. Lewis. *Soil Bioengineering: An alternative for Roadside Management: A Practical Guide*. United States Forest Service. San Dimas Technology and Development Center. San Dimas, California. 1999.

David F. Polster. "Soil Bioengineering for Steep/Unstable Slopes and Riparian Restoration." In *Watershed Restoration Technical Bulletin: Streamline*. Volume 4. No. 4. British Columbia Ministry of Environment.

Hugo Schiechl and R. Stern. *Ground Bioengineering Techniques for Slope Protection and Erosion Control*. Blackwell Science Publications, 1997. ISBN: 0-632-04061-0

Hugo Schiechl. *Bioengineering for Land Reclamation and Conservation*. University of Alberta Press. 1980.

State of Alaska website on streambank stabilization
<http://www.state.ak.us/adfg/habitat/geninfo/webpage/techniques.htm>

Turner & Schuster, eds. *Landslides Investigation and Mitigation, Special Report*, Transportation Research Board. 1996.

General

Washington State Department of Transportation (WSDOT) practices an ecologically based program of roadside vegetation design and management that seeks to produce low-maintenance, self-sustaining plant communities. The use of native plants is integral to this system. The [Roadside Classification Plan](#) provides policy on roadside character classifications and appropriate treatment levels for revegetation.

Revegetation plans are an important part of many highway projects and are required when the project disturbs the roadside. The inclusion of a WSDOT Landscape Architect in the design development process can aid the design process and improve the environmental and visual quality of Washington's roadsides.

References

- [Construction Manual](#), M 41-01
- [Design Manual](#), M 22-01
- [Hydraulics Manual](#), M 23-03
- *Integrated Vegetation Management for Roadsides*, WSDOT
- *Maintenance Manual*, M 51-01
- [Roadside Classification Plan](#), M 25-31. (Includes the "Roadside Classification Log.")
- [Standard Specifications for Road, Bridge and Municipal Construction](#), M 41-10 *Metric* *English*
- *Utilities Accommodation Policy*, M 22-86
- Corridor management plans for Scenic and Recreational Highways
- [RCW 17.10](#) State Noxious Weed List. The site below links to information on noxious weeds:
<http://wsdot.wa.gov:80/fossc/maint/roadside/Guidelines/NoxWeed.html>
- [RCW 47.40](#) Roadside Improvement and Beautification. Outlines permit process for persons wishing to use highway right of way for improvement and beautification. Establishes penalty for destroying native flora on state lands. Mandates litter removal, and authorizes state and local Adopt-a-Highway programs.

- [WAC 173-270-040](#) Vegetation Management Program. States that the purposes of vegetation management in highway rights of way are to establish and maintain stable plant communities that resist encroachment by undesirable plants, noxious weeds, and other pests; meet WSDOT operational, health, natural resources and environmental standards; be cost effective; and protect the public investment with minimal negative impacts on the environment. Requires a vegetation management program for all state highways with the Puget Sound basin.
- [WAC 468-34-340](#) Preservation, restoration and cleanup of areas disturbed through utility installation, maintenance and repairs. Outlines criteria for utility use of highway right of way, requires utilities to repair or replace unnecessarily removed or disfigured trees and shrub, and specifies vegetation management practices.

Resources

The region's Landscape Architects

The region's Maintenance Office

OSC Roadside and Site Development Unit

OSC Horticulturist

FOSSC Landscape Architect

Heritage Corridors Program (when working in a Scenic and Recreational Highway corridor)

Definitions

blend To create a balanced, visually harmonious interface between adjacent elements. A roadside treatment strategy that integrates roadside elements to preserve roadside character continuity.

buffer The zone contiguous with a sensitive area that is required for the continued maintenance, protection, insulation, function, and structural stability of the sensitive area. The critical functions of a riparian buffer (those associated with an aquatic system) include shading, input of organic debris and coarse sediments, uptake of nutrients, stabilization of banks, interception of fine sediments, filtering of pollutants, overflow during high water events, protection from disturbance by humans and domestic animals, maintenance of wildlife habitat, and room for variation of aquatic system boundaries over time due to hydrologic or climatic effects. The critical functions of terrestrial buffers include protection of slope stability, attenuation

of surface water flows from storm water runoff and precipitation, and erosion control.¹

climax vegetation A stable end-point to plant succession (“steady state”) where a group of species predominate and replaces itself.²

corridor management plans A written document that specifies the actions, procedures, controls, operational practices, and administrative strategies to maintain the scenic, historic, recreational, cultural, archeological, and natural qualities of a Scenic and Recreational Highway.

cuttings Live plant material without a previously developed root system. Source materials for cuttings should be dormant when the cutting is taken.

ecological succession The natural tendency of plant communities to evolve over time.

enclose A roadside treatment strategy, the aim of which is a more or less permeable buffer between two adjacent elements, typically the roadway and adjoining lands. Roadside treatments, such as berms, structures, or vegetation, are used to provide visual buffers along both sides of the road. In Figure 800.1 vegetation provides a sense of enclosure for the roadway.

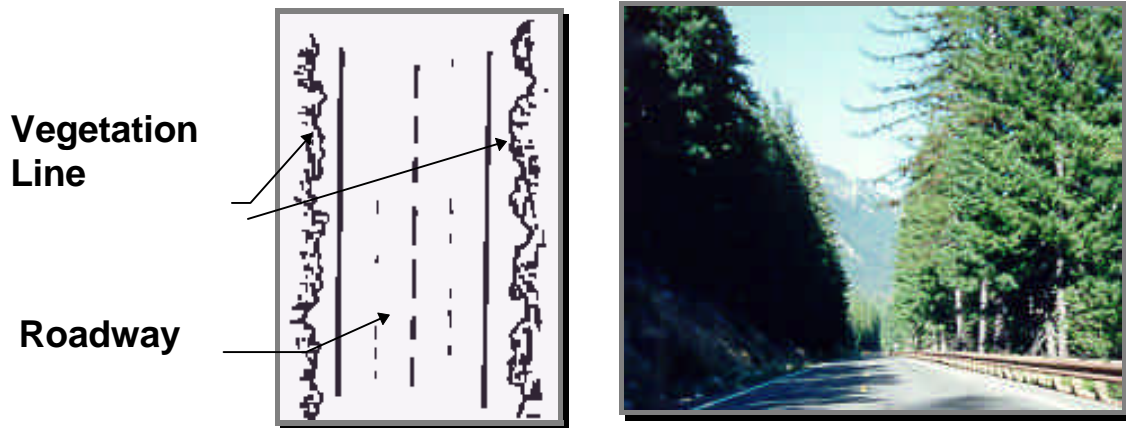


Figure 800.1 Vegetation enclosing the highway

expose A roadside treatment strategy, the aim of which is to preserve or open a visual sight line, or remove vegetation for operational purposes, such as in the Design Clear Zone.

forb An herbaceous plant, such as clover, which is not a grass, sedge, or rush.

¹ *Highway Runoff Manual*, M 31-16. WSDOT, pp Glossary 1-2.

² Oliver and Larson, p. 147.

groundcover Low-growing plants that form a dense, extensive growth and tend to prevent weeds and soil erosion.

herbaceous plant Any flowering plant except those developing persistent woody bases and stems above ground.

live poles A form of cutting taken from woody vegetation with a diameter greater than 50 mm (2 inches).

live stakes A form of cutting taken from one to two year old woody vegetation with a diameter of less than 50 mm (2 inches).

native plant A plant occurring naturally in a particular region, ecosystem, or habitat at the time of European settlement.

plant material Trees, shrubs, ground covers, cuttings, live stakes, live poles, rhizomes, tubers, rootstock, and seedlings are referred to collectively as “plants” or “plant material.”

reference site An established undisturbed natural site that is used as a comparative design guide to help determine the desired plant composition and species densities for the created, or enhanced project site. It should be located near the project site, preferably within the same watershed, and have similar landscape setting, hydrology and topography.

rhizome A root-like, usually horizontal stem, growing under or along the ground that sends out roots from its lower surface and leaves, or shoots from its upper surface. The primary means by which some plants spread or reproduce.

roadside classification Any of five classifications given to a route or stretch of roadway through a review process conducted by WSDOT, and documented in the WSDOT “Roadside Classification Log.” Roadside character classifications fall within two categories: natural and built. *Natural* includes the Open and Forest roadside character classification. *Built* includes the Rural, Semiurban, and Urban roadside character classifications.

roadside restoration The use of planning, design, construction, and maintenance activities to restore roadside plant communities according to designated roadside character and [Roadside Classification Plan](#) provisions.

roadside treatment strategies Conceptual design strategies used to coordinate implementation of roadside guidelines and fulfill roadside functions. The three basic treatment strategies are enclose/screen, expose, and blend.

Scenic and Recreational Highways A public road having special scenic, historic, recreational, cultural, archeological, and/or natural

qualities that have been recognized as such through legislation or some other official declaration. The terms “byway,” “road,” and “highway” are synonymous. They are not meant to define higher or lower functional classifications or wider or narrower cross-sections. Moreover, the terms State Scenic Byway, National Scenic Byway, or All-American Road refer not only to the road or highway itself but also to the corridor through which it passes.

screen The use of roadside treatments such as vegetation, berms, or walls to visually block undesirable views, as seen in Figure 800.2. In the picture to the right, below, vegetation is used as a permeable screen for the noise wall.



Figure 800.2 Use of vegetation to screen a wall

seedlings Plants grown from cuttings, seeds, or other approved propagation methods. They are generally under 3 years old and under 600 mm (2 ft) in height. Measurement is by height, in 75mm (3inch) increments, or by age and number of times transplanted.

shrub A low, woody plant having several stems.

sustainable roadsides Those roadsides that are designed with the intent of integrating successful operational, environmental, and visual functions with low life cycle costs.

tuber A swollen, usually underground stem, such as the potato, bearing buds from which new plant shoots arise.

weed Any plant growing in a location in which it is not desired. A plant growing out of place.

wildflowers Native flowering plants including flowering forbes, shrubs and trees.

xeriscape A landscaping concept based on water conservation through the use of plant materials and techniques appropriate for dry climates or site conditions.

Vegetation

Functions of Vegetation

Vegetation has many functions and adds significant value to our environment. These functions include:

- Traffic calming
- Stress reduction
- Buffer or shade for pedestrian or park and ride facilities
- Stream bank stabilization
- Wetland mitigation
- Water quality improvement
- Water retention and smoother flows
- Air pollution mitigation
- Noise abatement
- Wildlife habitat
- Enclose, screen, expose, or blend
- Visual quality, quality of life
- Corridor continuity
- Roadside Character Classification as noted in the [*Roadside Classification Plan*](#)

Important additional functions of vegetation include:

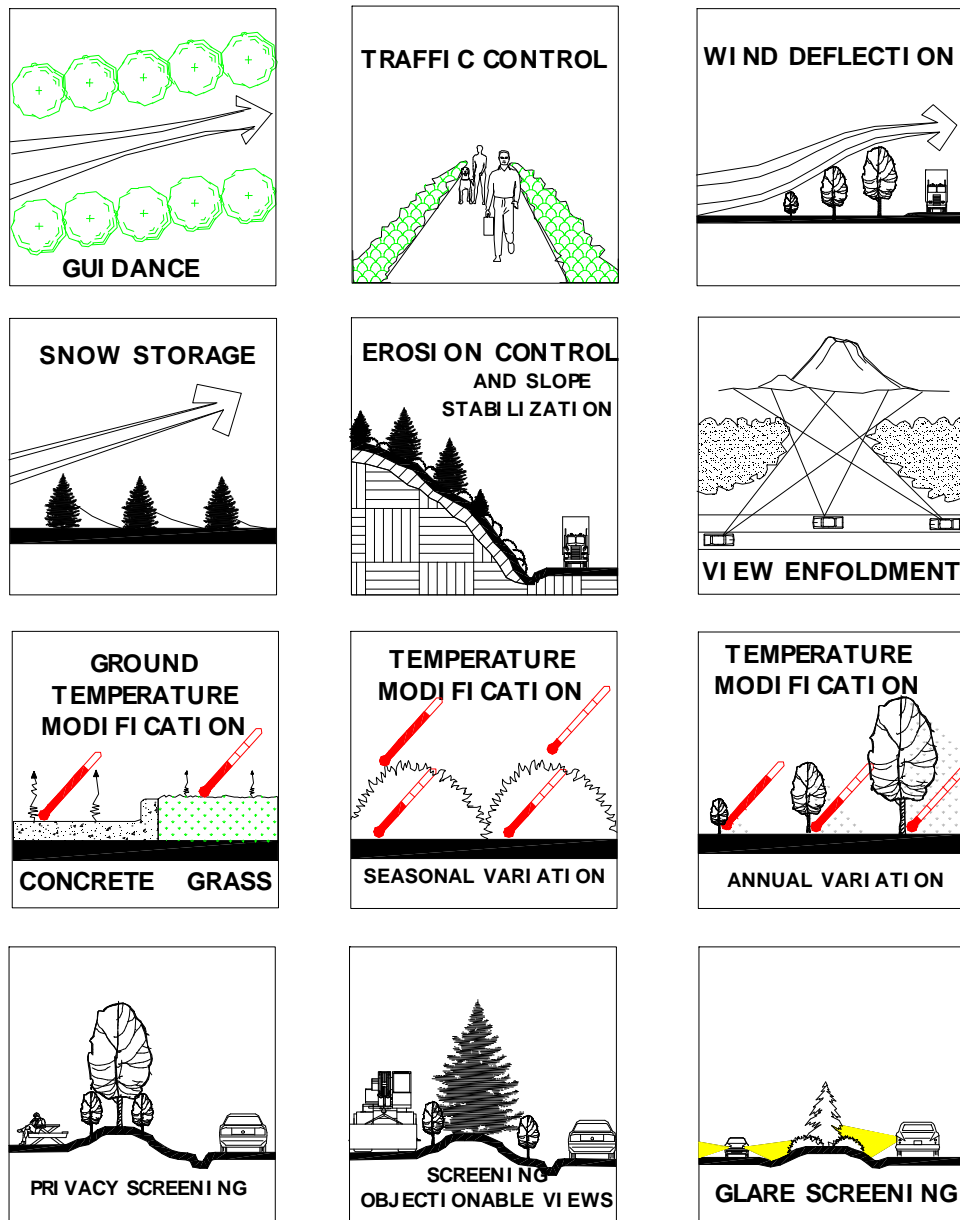


Figure 800.3 Examples of Some Functions of Roadside Vegetation

Roadside Vegetation

Existing vegetation alone often meets roadside function requirements but revegetation projects are initiated after disturbance or for improvement projects. For revegetation of roadside areas disturbed during roadway projects, contact the region's Landscape Architect or the OSC Roadside and Site Development Unit in regions without a landscape architect. They will provide planting designs and seeding

specifications. All planting plans require the stamp and signature of a Landscape Architect.

Revegetation activities range from seeding grasses to installing diverse plant communities. Roadside revegetation can include planting trees, shrubs, ground covers, live stakes, live poles, rhizomes, tubers, rootstock, seedlings, and seeds. See the *Standard Specifications* for information on plant specification.

General Guidelines for Roadside Vegetation

- Protect existing desirable vegetation.
- Maintain Design Clear Zone and sight distance according to the *Design Manual*.
- Maintain, restore, or enhance roadside functions.
- Maintain, restore, or enhance roadside character classifications (Forest, Open, Rural, Semiurban, Urban).
- Implement Treatment Levels in the *Roadside Classification Plan*.
- Implement treatment strategies (enclose/screen, expose, blend).
- Choose the right plant for the right place.
- Provide complete vegetative cover, where possible.
- Encourage desirable volunteer growth by allowing natural succession to take place.
- Install, protect, and enhance desirable native plant material.
- Discourage invasive species and noxious weeds.
- Use Integrated Vegetation Management techniques.
- Perform soil analyses to determine if soil amendments are necessary.
- Provide topsoil and/or amend existing soils when installing projects where it will improve plant survivability.
- Design for self sustaining plant communities to minimize long term maintenance.
- Minimize requirements for fertilizer and pesticide use.

Planning

Roadside Classification Plan

Vegetation management maintains or restores roadside functions and character in order to produce low maintenance, self sustaining plant communities in accordance with the [*Roadside Classification Plan*](#) (RCP). The RCP coordinates and guides the management of Washington State highway roadsides, including planning, design, construction, and maintenance activities. The RCP provides extensive roadside vegetation management guidance, including:

- Treatment level guidelines for Forest, Open, Rural, Semiurban, and Urban roadside character classifications.
- Treatment tools (landform, vegetation, and structure) used to restore roadside character.

The [*Roadside Classification Plan*](#) advocates the use of native plants, Integrated Vegetation Management, and a long-term management approach to achieve sustainable roadsides.

Integrated Vegetation Management (IVM)

Integrated Vegetation Management is a coordinated decision-making and action process that uses the most appropriate vegetation management methods and strategy, along with a monitoring and evaluation system, to achieve roadside maintenance program goals and objectives in an environmentally and economically sound manner.

Tactics selected are site specific. Chemical controls are used only when needed. IVM uses plant growth characteristics, principles of succession, and knowledge of natural and human-related factors affecting environmental change to achieve management goals, while minimizing impacts on the environment. For details, refer to *Integrated Vegetation Management for Roadsides*.

Corridor Management Plans

Corridor Management Plans identify the location of a Scenic and Recreational Highway route and its corridor. Revegetation plans can be affected due to the high visibility of these corridors. The maintenance of existing vegetation can also be affected. Refer to the Heritage Corridors Program for assistance.

Design

It is WSDOT policy to use native plants, including wildflowers to the greatest extent practical.

Species diversity, within the context of native plant associations, is encouraged. A diverse plant mix is less susceptible to disease and homogeneous decline.

Landscape Architects develop PS&E packages that include plant materials lists. Plant material selection is based on site specific requirements.

Consider awarding a separate contract for planting projects. This usually results in better projects.

Landscape Plans, and any other plans that specify plants, require the stamp and signature of the Landscape Architect.

Design Criteria

Refer to the maintenance Functional Zone Objectives in Division 1. Select and locate plants with the following criteria in mind to avoid future problems and to avoid increased or difficult maintenance.

- **Sight Distance** Design for and maintain sight distance for motorist, bicycle, and pedestrian traffic. Sight distance is also a security issue for safety rest areas, park and ride lots, pedestrian facilities, and bicycle facilities (see the [Design Manual](#)).
- **Design Clear Zone** The Design Clear Zone is a function of posted speed, side slope, and traffic volume. Do not locate trees that can grow over four inches in trunk diameter in the Design Clear Zone (see the [Design Manual](#)).
- **Traffic Barriers** Set shrubs and ground cover plants a minimum of 600 mm (2 ft) and trees a minimum of 2 m (6 ft) from traffic barriers to reduce maintenance.
- **Vertical Clearance** Provide appropriate setbacks for trees that might overhang the roadway. When trees do overhang the roadway, provide a minimum vertical clearance of 5 m (16 ft). Minimum vertical clearance over trails and pedestrian facilities is 3 m (10 ft).
- **Medians and Gore Areas** Design medians and gore areas to be a minimum of 3 m (10 ft) wide. Narrower areas tend to be a problem for maintenance personnel, are expensive to irrigate, and generally are unsatisfactory for revegetation. Consider paving, stone, or other bare surface material in gore areas less than 3 m (10 ft) wide.
- **Right of Way Line** Place trees and shrubs a minimum of 2 m (6 ft) inside the right of way line.
- **Curb Lines of City Streets** Comply with local agency standards and WSDOT sight distance criteria for revegetation.

- **Structures** Locate trees as far back from structures as necessary to avoid operational conflicts and the need for excessive pruning.
- **Trails** Set back evergreen trees with branches less than 2 m (6 ft) from the ground a minimum of 6 m (20 ft) from trails. Select species native to the area wherever possible. Set back shrubs higher than 1.5 m (5 ft) a minimum of 2.4 m (8 ft) from trails, for security purposes.
- **Other Roadside Features** Do not locate vegetation that will interfere with signs, signals, or luminaires. Trees and shrubs can provide visual background for signs.
- **Utilities** Refer to the *Utilities Accommodation Policy* for guidance. Avoid impacting utility lines and sewer systems.
- **Corridor Management Plans** Where applicable consult these plans to enhance corridor continuity and to reinforce the character of the Scenic and Recreational Highway.

Plant Material Selection

Plant material selection is based on a site analysis of conditions, maintenance Functional Zone Objectives, plant availability, plant cost, plant success rates in the field, traffic speed, and other horticultural requirements.

Follow these general guidelines for plant material selection for grasses, forbs, shrubs, trees, and groundcovers.

Grasses and Forbs

Consider the following criteria when selecting grass or forb plant material:

- Satisfaction of the functional requirements of the design.
- Ability to provide visual cues that reinforce changes in speed and driving conditions.
- Simplicity of appearance and compatibility with the speed of traffic and the overall landscape.
- Production of extensive root systems.
- Rapidity of establishment.
- Tolerance of site conditions.
- Resistance to insects and diseases.
- Availability from commercial suppliers.
- Ability to self-perpetuate.

- Compatibility with maintenance objectives.

Select species native to the area wherever practical.

Do not use forbs in roadside seed mixes where there are deer.

Do not use lupine adjacent to agricultural or grazing areas.

Do not use seed mixes that include species on the State Noxious Weed List ([RCW 17.10](#)). The site below links to information on noxious weeds.
<http://wsdot.wa.gov:80/fossc/maint/roadside/Guidelines/NoxWeed.html>

Trees, Shrubs, and Groundcovers

Consider the following criteria, in addition to the criteria for grasses and forbs, for shrubs, trees, and groundcover:

- Appropriate characteristics for desirable functions.
- Suitability for space and site conditions.
- Compatibility with natural plant succession.
- Ability to regenerate after damage.
- Longevity.
- Ability to maintain or enhance habitat values for wildlife, where this is desirable. This is determined on a site specific basis in conjunction with the region's environmental office.
- Ability to withstand traffic-generated stresses, such as air pollution and air turbulence.
- Compliance with state and county noxious weed control regulations.
- Select plant species that do not impact endangered or rare species.
- Select species native to the area wherever possible.
- Consider compatibility with the site's natural plant selection process.
- Consider compatibility with roadside maintenance objectives for the area.
- Native flowering shrubs and trees to satisfy the requirement for the use of wildflowers on federally funded projects.

Plant Sizing

Plant size is based on:

- Guidelines of the [Roadside Classification Plan](#).

- Design requirements.
- Commercially available sizes.
- Vandal resistance.
- Transplant survival.
- Available funding.
- Functional needs.
- Maintenance requirements.
- Smaller plants are usually more cost effective and more easily established than larger ones.

Establishment of Vegetation: The Right Plant for the Right Place

Plant survivability is improved and maintenance requirements are decreased when plants are matched to site conditions and proposed use.

Successful establishment of vegetation improves with:

- Soil conditions that support the desired plant community or outcome. Restore the soil as closely as possible to the qualities existing in adjacent undisturbed soils. (Create the situation that supports the desired outcome. Refer to adjacent soils and plant communities for an indication of what the area will support in terms of vegetation.)
- Consider the use of mycorrhizal inoculants in areas with no topsoil.
- An understanding of plant succession dynamics and natural processes. For example: physiological characteristics; life history; responses to competition; role within the plant community and successional pathway; and how the plant responds to management techniques.

Physical and chemical soil treatments may improve establishment of vegetation. Mulches conserve soil moisture, reduce soil temperature, and provide a better environment for plant growth. Soil amendments can enhance the soil's moisture holding capacity thereby reducing and perhaps eliminating the need for irrigation.

- Soil nutrient availability can be an important determinant of species composition. Refer to the [Soils and Soil Amendments chapter \(700\)](#).
- Consider variations in rooting depths between grasses, shrubs, and trees. Complexity of underground root structure improves erosion

control, slope stability, and minimizes the opportunity for invasion of undesirable vegetation. The amount of vegetation above ground is related to the root volume below ground as seen below in Figure 800.4.

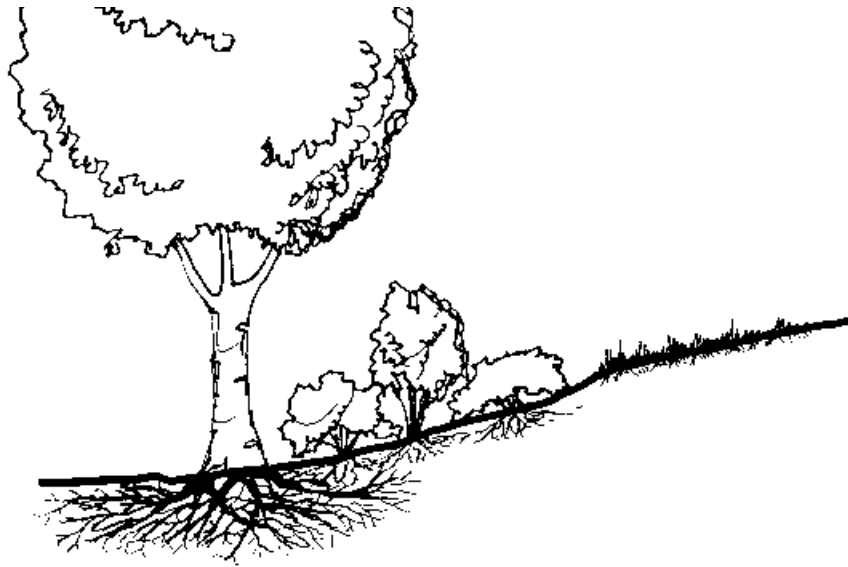


Figure 800.4 Relative root depths and volumes

- Commercial water holding polymers and other similar products can be used during the plant establishment period to provide young plants with moisture.

See the [Irrigation chapter \(820\)](#) for guidance on irrigation of plant material.

Weed barriers can reduce weed competition until desired plants are able to compete for light and nutrients more effectively. They also moderate soil temperature and conserve moisture. Weed mats and bark or wood chip mulch are two examples of weed barriers.

Plant selection composition

Restoration and revegetation projects are most practically planted in mixtures of native plant species. The mixture is composed of various species in balanced proportion to each other.

Factors that determine species percentages within a plant selection are:

- Desired ultimate composition of the plant community, for example forest, scrub-shrub communities.
- Function within the plant community, such as overstory, understory, shrub, groundcover, and herbaceous.

- Dominance in the plant community.
- Growth characteristics.
- Compatibility with other species:

Proportion and manage aggressive, fast growing species such as elderberry or cottonwood, to reduce conflict with slower growing species.

Slower growing species, such as vine maple, salal, and spruce may require a higher percentage of representation to be successful in the development of the plant association.

Some species may not be appropriate for the initial planting phase. Included are understory plants, such as salal or vine maple that demand a micro-environment that can only develop over time.

Spacing

The distance between plants is determined by the following considerations.

- Weed control. A densely spaced vegetation minimizes the establishment of weeds.
- Some plant species need support from surrounding plants in order to compete and develop. These form functional plant associations. Examples are snowberry, rose, salal, mahonia, spiraea, and mock orange. Plant spacing is based on closure of the canopy after approximately three years. The shrubs form a thicket over time which can shade out weeds.
- Consider the developmental needs of individual plants.
- The following species are examples of species that may be considered for clustering: aspen, hazelnut, and oceanspray.
- Space climax vegetation to resemble the spread in the natural plant community as determined by the reference site.
- Space species such as red alder to quickly perform their function in the plant succession scheme without causing undesirable competition to other desirable plants. A management program that includes periodic removal of plants that have outlived their function will be necessary.

Determination of percentages within a plant selection mixture.

This section discusses a method for determining the numbers of plants per species to use in a revegetation plant mixture. The percentages of

the species within a plant selection mixture are based on the desired spacing and distribution in the planting area.

- Decide on the native plant revegetation concept: Managed Succession or Accelerated Climax Community Development. (Refer to chapter 810 for more information on these concepts.)
- Develop the desired plant palette for the plant selection mixture.

For example, a roadside restoration mixture that follows Accelerated Climax Community Development principles is designed to consist of a shrub layer of snowberry, rose, and Oregon grape. Intermediate or understory species consist of oceanspray, hazelnut, and vine maple. The overstory is Douglas fir, western hemlock, red alder, and big leaf maple. Red alder is intended to function as a temporary cover crop (overstory) with most alders to be removed during the initial five to seven years.

- Establish an area size to base the calculations on. Metric and English examples are shown in the following three charts:

Total planting area	930 m ²	10,000 sq ft
Spacing	1 m	3 ft
Area per plant	0.836 m ²	9 sq ft
Divide total by area per plant	930 m ² ÷ 0.836 m ² =	10,000 sq ft ÷ 9 sq ft =
Total number of plants	1112*	1111*

* Round to 1100 plants for this example.

For the overstory species of Douglas fir, western hemlock, red alder, and big leaf maple, determinations are made for the species mixture. Site conditions are less favorable for western hemlock; thus its percentage has been arbitrarily established at 2% of the total of 1100 plants. For the remaining species, the following calculations are made:

Total planting area	930 m ²	10,000 sq ft
Spacing	5 m	15 ft
Area per tree	37 m ²	400 sq ft
Divide total by area per plant	930 m ² ÷ 37 m ² =	10,000 sq ft ÷ 400 sq ft =
Total number of trees	25	25

Twenty-five trees is about 4% of the total number of plants or 1 1/3 % for each species.

Because, of the three species listed above, Douglas fir is the least competitive on the chosen site, it is assigned 2%, with red alder and big leaf maple each making up 1% of the total species mix. Overstory species will total 6% (2 +2 +1+1).

For intermediate height, understory species such as oceanspray, hazelnut, and vine maple, spacing is desired as seen below: (In a managed succession planting program these species would be added in subsequent years as the overstory develops and shade becomes available.)

Total planting area	930 m ²	10,000 sq ft
Spacing	3 m	10 ft
Area per tree	9.3 m ²	100 sq ft
Divide total by area per plant	930 m ² ÷ 9.3 m ² =	10,000 sq ft ÷ 100 sq ft =
Total number of trees	100	100

One hundred plants are about 10% of the total. Vine maple is arbitrarily assigned 4% and the oceanspray and hazelnut are assigned 3% each.

The remaining percentage of 84% is shared by the shrub layer of snowberry, rose, and Oregon grape. Observations of the reference site for this project have documented a forest floor dominated by snowberry with rose and Oregon grape interspersed in mostly small clusters. The decision is to assign snowberry with 50%, rose with 20%, and Oregon grape with 14% based upon the ratios at the reference site.

The shrub layer shades out undesirable competitors by early closure. It has been experienced that a 1 m (3 ft) spacing per plant will provide this benefit within the normal plant establishment period of three years. The final mixture looks as follows:

Plant Selection EXAMPLE					
<u>Botanical name</u>	<u>Common name</u>	<u>%</u>	<u>Spacing</u>	<u>Quantity</u> 1100 Total*	<u>Notes</u>
Pseudotsuga menziesii	Douglas fir	2	3 m (10 ft) min.	22	-
Tsuga heterophylla,	western hemlock	2	3 m (10 ft) min.	22	-
Alnus rubra	red alder	1	3 m (10 ft) min.	11	-
Acer macrophyllum	big-leaf maple	1	3 m (10 ft) min.	11	-
Holodiscus discolor	oceanspray (creambush)	3	3 m (10 ft) min.	33	Clusters of 3 - 5
Corylus cornuta	beaked hazelnut	3	3 m (10 ft) min.	33	Clusters of 3 - 7
Acer circinatum	vine maple	4	2 m (6 ft)min.	44	-
Symphoricarpos albus	snowberry	50	1 m (3 ft) O C	550	-
Rosa gymnocarpa	wood rose	20	1 m (3 ft) O C	220	Clusters of 15-25
Mahonia aquifolium	Oregon grape	14	1 m (3 ft) O C	154	Clusters of 3 - 7

* Quantities are based on the area in the example above. In a real project situation, the quantities will be calculated for the actual planting area that is designated for the plant selection.

Table 810.1 Plant Selection for the Example

Notes: Average plant spacing of the plant mixture just under 1m (3 ft) on center. (930 m²/1100plants)

Trees are to be randomly distributed throughout the planting area.

OC = on center. Plant spacing measured from center to center of plant.

Construction

Design documents consider construction requirements such as site accessibility and constraints such as contract timing. During construction:

- Do not deviate from plans without approval of the Landscape Architect.
- Protect existing trees from construction impacts.

Ideally, the root zone of vegetation is protected out to 1.5 times the diameter of the drip line. At a minimum, protect the root zone to the outermost reach of its branches (the drip line). If cuts or fills are required in the vicinity of trees to be saved, consider retaining walls, tree wells, gravel, or drainage systems to protect the root systems.

Heavy equipment stored, parked, or driven around the base of a tree can compact the soil and deprive the tree's roots of the water and air they need to survive. Stockpiling building materials or fill can have a similar effect. Refer to the Soils and Soil Amendments chapter for more information on soil compaction and its minimization.

Scraping soil from roots or cutting them too deeply or too close to the tree can cause the tree to die or have a weakened hold and blow down. This damage may not be visible for years.

- Contracts often include a one year plant establishment guarantee period from the contractor.
- On projects operating under a Corridor Management Plan, the community has had significant input into the plans and deviation could cause problems.

Maintenance

The maintenance supervisor in charge of the contract area reviews and comments on plans during the development of the PS&E.

Maintenance review is essential because WSDOT maintenance crews maintain landscape projects after installation, for the life of the project.

Before maintenance crews make significant changes in existing roadside landscaping, consult any applicable Corridor Management Plan and the region's Landscape Architect. Communication between all roadside partners is an important part of improving Washington's roadsides.

Partnerships

Some projects have special partnership arrangements, for example, WSDOT might require the project sponsor or partner to maintain plant communities. Corridor Management Plans will describe partnership agreements within the scenic highway corridor. Project sponsors have included cities, counties, tribes, Metro, Intercity Transit, and other agencies. In these cases, the partner, or partners, reviews design documents and plant material selection prior to installation; they can also contribute labor, funding and materials.

Security and Visibility: Safety Rest Areas and Weigh Stations

WSDOT has a policy of not removing vegetation or limbing trees in the roadside to open views for adjacent property owners. The following are general recommendations for areas where vegetation is creating security concerns or limiting visibility within Safety Rest Areas, weigh stations, etc.. Visibility into a site is often needed or requested by agencies such as the Washington State Patrol.

The following actions have been used successfully in a number of areas to alleviate concerns while minimizing impacts on existing vegetation and the valuable functions it provides. These actions are only applicable to alleviate specific security and site visibility concerns, and are not intended as a standard treatment for every roadside area.

- Analyze the area to determine the source and extent of the concern.
- Evaluate all of the functions that the vegetation provides.
- Tailor all actions to balance any removal or thinning of vegetation with the functional value that the vegetation provides in the specific location.
- Complete removal of all vegetation (clearing) is not an acceptable method of alleviating every security concern. Strive for a win-win treatment that alleviates security and visibility concerns while retaining the functional value of the vegetation.

Where removal or thinning of vegetation is determined to be desirable, consider the following actions:

- Limb branches of large evergreen trees (Western Red Cedar, Douglas fir, etc.) to an approximate 3 m (9 ft) elevation.
- Prune smaller deciduous trees to encourage an open habit with leaves above a 2 m (6 ft) elevation (hazelnut, serviceberry, vine maple, etc.). Remove only branches that are within the direct line of vision.
- Trim shrubs and groundcover to a 0.6 m (2 ft) height and do not allow to grow higher than 1 m (3 ft) high before pruning again (salal, snowberry, Nootka rose, etc.).

Consult with the region's Landscape Architecture Office or OSC Horticulturist for site and species specific pruning methods.

Additional Sources of Information

- American Association of Nurserymen, *American Standard for Nursery Stock*, Washington, D. C., latest version
- "Native and Adapted Plants for the Inland Northwest" WSU Cooperative Extension, Spokane County
- Jerry F. Franklin and C. T. Dyrness, *Natural Vegetation of Oregon and Washington*. Oregon State University Press. 1988.
- C. Leo Hitchcock and Arthur Cronquist, *Flora and Fauna of the Pacific Northwest*. University of Washington Press. 1973.
- Liberty Hyde Bailey and Ethel Zoe Bailey, *Hortus Third: A Concise Dictionary of Plants Cultivated in the US and Canada*. Macmillan Publishing Company, New York, 1976.
- N. J. Coppin and I. G. Richards, *Use of Vegetation in Civil Engineering*, Construction Industry Research and Information Association (CIRIA), London, 1990.
- D. H. Bache and I. A. MacAskill, *Vegetation in Civil and Landscape Engineering*, Granada Publishing Ltd, London, 1984
- Michael Dirr, *Manual of Woody Landscape Plants*, Champaign, Illinois, Stipes Publishing Company, 1983.
- Richard W. Harris, *Arboriculture: Integrated Management of Landscape Trees, Shrubs and Vines*, Prentice Hall Career and Technology, Englewood Cliffs, New Jersey, 1983.

General

The guidelines in this chapter provide background for the development of effective vegetation restoration methodologies. Two basic restoration approaches are used: managed succession and accelerated climax community development¹. They are based on the principles of plant succession in natural ecosystems. The decision on which approach to use depends on permitting requirements, project goals, and roadside functional objectives. The Landscape Architect shall be involved in all discussions concerning these decisions.

The following table gives a general indication of when the two methods are used.

RCP Treatment Level	Managed Succession	Accelerated Climax Community Development
1	X	
2	X	X
3		X

Figure 810.1 Restoration Method Use

When roadside areas are disturbed during roadway projects, the project's lead agency or Project Office is responsible for rehabilitating the roadside according to the policies stated in the [Roadside Classification Plan](#). The guidelines and discussion in this chapter will facilitate restoration of the roadside environment.

The use of native plants in roadside restoration will, over the long-term, reduce maintenance and life cycle costs of our roadsides. For example, the use of native plant communities reduces mowing costs over the life of the roadside.

References

[Roadside Classification Plan](#), M 25-31, WSDOT

¹ Not all experts accept the Climax concept, however it is the most widely accepted theory of plant community development at this time. Because of its ease of use as a conceptual framework it will be used in this manual.

Resources

Region's Landscape Architects
Roadside & Site Development Unit
Region's Environmental Office
OSC Environmental Affairs Office Biology Unit
OSC Horticulturist

Definitions

accelerated climax plant community The process of restoring a site to a desirable climax plant community in reduced time when compared to natural processes.

allogenic succession Changes in the composition of the plant community as a result of environmental forces.²

autogenic succession Changes in the composition of a plant community due to interplant interactions (facilitation or competition).³

climax vegetation A stable end-point to plant succession ("steady state") where a group of species predominates and replaces itself.⁴

enhancement Any improvement of a structural component to increase the level of ecological functioning of a site.

genotype The genetic make-up of an organism.

managed succession A technique that uses management activities to modify the rate and direction of succession.

plant association A particular, consistent group of species growing in a particular, consistent type of habitat.

plant community A general term describing the group of plants growing in an area.

plant succession Directional, cumulative change in the species that occupy a given area through time.⁵

reference site An established, minimally disturbed natural site that is used as a comparative design guide to help determine the desired plant composition and species densities for the created or enhanced project site. Preferably, the reference site is near the project site, within the same watershed, and has similar hydrology, soils, solar exposure and

² Oliver and Larson, p. 29.

³ Ibid., p. 29.

⁴ Ibid., p. 147.

aspect, and topography. Multiple reference sites can be used resulting in a number of possible community outcomes.

restoration The process of renewing and returning ecosystem function and health⁵ (for systems that have been significantly altered by human activity).

Succession

Plant communities are in a constant state of fluctuation due to changes in their environment. As a general rule, the composition of any given community can shift in response to changing conditions caused by disturbances. If the disturbance is small, the change in plant community will not be dramatic. If the disturbance is large, such as fire, a landslide, or road building activities, the change in the plant community will be dramatic. Species most suited to the new conditions will colonize in the greatest number. Over time, if no new disturbance occurs, new plants will colonize the area. The new species often tend to be larger, longer lived, and/or woody. This directional, cumulative change in the species present over time is plant succession.

Succession is governed by both external and internal forces. Allogenic (external) forces include human activity, animals, fire, wind, flooding, earthquakes, land slides, climate change, and pathogens and pests.

Autogenic (internal) forces include competition or facilitation between the plants themselves that bring changes in relative abundance of species. These internal changes include displacement of one species by another, shifts in population structure (relative percentage of any one species to the population as a whole), facilitation of increasing dominance by one species due to the conditions created by another, and changes in available resources (sunlight, soil, moisture, etc.).

Disturbance and Succession

Depending on the severity of a disturbance, two types of succession can take place. These are primary and secondary succession.

Primary succession is the initial stage of plant community restoration following a severe disturbance that leaves bare soil. Initial colonizers, known as pioneer species, establish themselves rapidly during the first growing season, providing cover and minimizing soil erosion. Many plants involved in primary succession are those that can tolerate a wide variety of conditions including the scarcity of water and nutrients. They reproduce rapidly and often spread large quantities of

⁵ Society for Ecological Restoration, 1995.

seed using wind or animals as carriers; characteristics of many weeds; for example Scotch broom in uplands or toad rush in a wetland.

Secondary succession begins either after the plant community of the primary successional phase has become established or following a more mild disturbance which leaves some of the predisturbance habitat in tact. Plants involved in secondary succession are generally longer lived and require somewhat more developed soil conditions to survive. They are often fast-growing trees or shrubs and serve to further stabilize and amend the soil. Examples of secondary succession include red alder colonizing a clear-cut, willow spreading into or along the edge of a wetland, or Douglas fir getting started in a windfall-caused clearing in a mature western hemlock forest.

Secondary succession can take place without the entire plant community being dominated by the new species. A single new species out competing an established species for its niche habitat is an example of secondary autogenic succession.

Climax Plant Communities

As conditions change across varying habitats, the plant community that dominates the area changes. Communities also change over time as plants and animals alter the microenvironment by changing the nutrient content, texture, and moisture levels in the soil. Their physical structures also provide shade and intercept rainfall, affecting the microhabitats within their canopies. These changes, coupled with disturbances, give other species a competitive advantage.

Over a long period of time, a series of subtly different communities dominate the site. Eventually, in the absence of disturbance, a steady state is reached in which existing species keep reproducing their numbers and new species are mostly excluded. This later example is known as a climax community and represents a mature, stable system. Even climax communities can be sent back to an earlier successional stage by disturbances such as fire or beaver activity.

Genetic Diversity

One goal in vegetation restoration is to match the genotype of plant materials as closely as possible to that which occurs in similar plant associations within the watershed.. Unlike agriculture or forestry, which selects genetic strains for a limited number of desirable characteristics (such as a crop ripening at the same time for ease of harvest), restoration seeks to promote and retain the natural range of variation of genotypes that occur within in nearby reference sites. Genetic diversity often allows for wide variability within the same species in a single plant community.

Appearance does not necessarily indicate the genetic adaptability of a plant. One member of a species might have characteristics that allow it to survive under stresses such as drought or pests. All members of the community can be of value.

Members of the same species found in different locations have different adaptations to their specific differences in habitats (for example soil type) or climate (for example blooming times might vary in accordance with local rainfall patterns). It is desirable to obtain plants grown from seeds or cuttings taken from within the same watershed whenever possible because these small differences can affect plant survival.

Vegetation Restoration Concepts

Managed Succession

With the strategy of managed succession, the objective usually is to manipulate the introduction of native pioneer species to develop site conditions that are conducive to desirable climax, or later successional species. This method is less expensive than planting an accelerated climax plant community and utilizes the desirable quality of promoting natural processes.

There are often situations where a later successional community might not be desirable. Managing successional patterns (arresting succession at a stable shrub stage for example) through careful design, site preparation, and selective maintenance is appropriate and desirable in many situations.

Management of the site might include introduction of pioneer species and secondary successional species or it might allow pioneer species to come in on their own. Periodic removal of the pioneer species and gradual introduction or encouragement of climax or later successional species might also be necessary. We expect our “mature” sites to go through some successional changes.

Pioneer or primary successional species are often weedy grasses and forbs that can rapidly colonize large patches of bare ground.

Eastern Washington

In much of Washington east of the Cascade mountains, grasslands with forbs are often the climax species. Woody vegetation might be limited or nonexistent.

In grassland and prairie restoration, develop a seed mix of native grasses. See the Appendix for grass seed mixes for low moisture zones.

- The species chosen are dependent upon the site and precipitation amounts. Use reference sites and local native ecosystem associations as a guide.
- Growing contracts for grasses might require 2 years lead time to produce sufficient seed for WSDOT construction or restoration projects.
- Select a mixture that allows for quick erosion control and long term soil structure enhancement.
- Add appropriate forbs to the seed mix for nitrogen fixing, nectar sources, and visual enhancement where wildlife forage will not contribute to a road-kill problem.
- Consider drill seeding native grasses. This gives the seed needed soil contact and protects the seed from wind and sun.
- Native grasses develop their root system before they develop top growth. Top growth might not be visible until the second or third year. Don't give up.
- Before using fertilizers in native grassland restoration, analyze the site and its soil chemistry. Native grasses cannot use large flushes of nutrients. When fertilizers are necessary, use a slow-release form.

Woody vegetation might consist of a sagebrush community, or trees that grow only on north-facing slopes or in riparian zones.

- Where it is practical and desirable to grow woody species, select plants that have been grown locally, whenever possible, because these will be hardy in that climate.
- If fertilization is needed, use only slow-release granular fertilizer.
- Some species in Eastern Washington can be considered pioneer as well as climax species. Quaking aspen, lodgepole pine, water birch, and Ponderosa pine are examples.

Lowland Western Washington

Woody secondary successional species begin to dominate once the primary pioneers have thoroughly colonized and "improved" the site conditions. Suitable early successional plants for humid ecosystems in Washington are Douglas fir, black cottonwood, willows, red alder, bigleaf maple, paper birch (most common in Snohomish County and north), Oregon ash (most common in southern King County and south) and red osier dogwood. These plants essentially function as a cover crop and are also part of a mature forest.

It is desirable that the species selection be proportioned to represent the natural, early succession stages or representative plant communities occurring in the watershed or sub-basin. Refer to chapter 800 for an example of this calculation.

Accelerated Climax Plant Community Development

The objective is to restore a site to a desirable climax plant community, or “special” non-climax communities: such as Puget prairies & sedge meadow wetlands, in reduced time when compared to the natural process. This method is more expensive than managed succession, but can meet project goals and regulatory requirements. Desirable conditions can be reached within 3 to 5 years.

The process involves the introduction of representative species of the desired plant community. Management of the site includes initial control or removal of undesirable plants.

Understory species might be selectively introduced over time. Species are selected from the referenced native plant community. The plant selection is generally a simplified representation of the desired climax plant community.

Plant selection criteria include:

- *Roadside Classification Plan* treatment recommendations
- Native plant community
- Compatibility with site conditions
- Availability from commercial nursery sources
- Survival characteristics
- Functions to be provided by the plants
- Similar reference plant communities in the watershed or sub-basin

Factors limiting climax community development include the growth rate of the desirable species, development of upper soil horizons, and colonization by necessary insect, mycorrhizae, and animals.

Methods for Managing Succession

Working *with* succession can assist the roadside manager to develop sustainable plant communities that require minimal ongoing management.

Management activities modify the rate and direction of succession. A management plan can be designed to either promote or hold succession at a given stage.

The three components of managed succession are:

- Designed disturbance
- Controlled colonization
- Controlled species performance

These are detailed further on succeeding pages. Each of these components can be used to enhance or arrest succession along the roadside. Note: arresting succession requires ongoing maintenance. (For example, mowing or burning to maintain open grassland rather than Scotch broom or forest.)

Examples of possible components of managed succession follow.

- Plant (or allow colonization by) desirable early successional species such as red alder or bigleaf maple (controlled colonization).
- Thinning of these trees can be done once they grow large enough to provide shade (designed disturbance).
- Interplant shade tolerant trees, such as western red cedar or western hemlock, or understory shrubs, such as salal or huckleberry (controlled colonization).
- Soil can be amended to optimize growing conditions for desired species (controlled species performance).

The overall goal of using managed succession is to establish sustainable plant communities.

Sustainable plant communities meet [*Roadside Classification Plan*](#) goals with minimal maintenance force expenditures.

Designed Disturbance

Designed disturbance is any activity initiated to create or eliminate site availability for plant growth. Examples of designed disturbance activities include, but are not limited to:

- Burning
- Chopping
- Clearing
- Fertilizer application
- Herbicide application
- Mowing
- Soil pH manipulation
- Thinning

- Adding topsoil and mulch

Along with climate, elevation, surface and ground water attributes, and orientation factors, soils are a primary determinant of vegetation patterns. Of these four factors, soils are most easily manipulated at any given location by the addition of amendments, nutrients, cultivation, grading, and water. It is important to replicate the natural soils on which the desired plant community is typically found.

The soil requirements of different plant communities can be drastically different with regard to pH, organic content, moisture levels, and chemical composition. Be sure the plants being installed either are adapted to the soil conditions of the site or that the resources are available to change the soil conditions. See the Soil and Soil Amendments chapter in Division 7 of this manual for more information.

Controlled Colonization

Controlled colonization usually involves adding plants to a site. Planting could range from seeding to planting large plants. In addition to introduced plants, desirable existing plants or seeds might be present on-site, or might be able to spread from adjacent sites. These plant starts will compete with, or augment, the ultimate design plant community. *Caution:* The introduction of exotic plants can seriously undermine vegetation restoration efforts. Every effort should be made to keep particularly troublesome species (for example reed canarygrass or Scotch broom) from becoming established at the site. Seed mixes, plantings and imported soils, should be guaranteed to be free of seeds, rhizomes, etc.

Controlled Species Performance

Controlled species performance uses various methods to decrease or enhance growth and reproduction of specific plant species. Successful controlled species performance recognizes the dynamic character of plant communities, and encourages specific plant communities that will resist invasion through competitive interactions. Individual species and their populations are targeted within this context. To accomplish this, the manager must have knowledge of species characteristics, including:

- Water, light, and nutrient requirements.
- Physiological characteristics, such as root structure, or plant shape.
- Responses to competition.

- Role within the plant community and successional pathway.
- How each species responds to proposed management techniques.

By understanding and using this information, the roadside manager can use common practices to control species performance. Some examples of controlled species performance practices are:

- Mowing undesirable species after flowering but before seed production to eliminate reproduction.
- Not mowing where desirable species (such as lupine) exist until after seed production to allow for next year's stand.
- Shading out shade intolerant invasive species with tree or shrub cover. (Not all invasive species are shade-intolerant, however.)
- Plant-specific application of selected herbicide.

Evaluation

To be successful, evaluate managed succession techniques until goals and objectives stated in the management plan are met, regulatory commitments are met, and the site is functioning. If a plant community is not developing according to the design set in the management plan, the region's maintenance staff, with the landscape architecture office, the Biologist, and the OSC Horticulturist will evaluate the situation and adjust practices and/or management plan goals accordingly.

Contracts and Schedules

Growing Contracts

Because plants selected from genetic stock obtained from the same habitat as the project adapt better to those climatic conditions, growing contracts may be necessary to obtain sufficient numbers of desired plants. For woody vegetation, one to two years growing time may be necessary. Grass and forbs may require two years or more from seed collection to seed production in numbers sufficient to seed the project area.

Consider having vegetation grown from seeds or cuttings taken from the vegetation of the construction site before construction begins.

When practical, allow time in the landscape contract for growing contracts where insufficient stock is available. This is in addition to the 1 to 3 year plant survival clause in the landscape contract.

Landscape Contracts

Because of the specialized nature and timing of roadside revegetation and restoration work, it can be advisable to separate this part of the contract from the engineering component of the project. This can allow the engineering contract to close while the revegetation contract continues. Funding must be assured in advance.

Consider work sequencing over at least two seasons to allow for managed succession practices.

Consider adding minimum landscape contractor's qualifications and references to the contract. Contract inspectors shall include the restoration design team or the wetland design team to ensure the project is constructed as designed, that it will meet regulatory requirements, and to make necessary adjustments to meet unexpected soil or moisture conditions.

For grassland work, consider specifying no-till seed drilling for seeding without disturbing the soil layers. This can be done only where the existing vegetation has been eradicated using non-residual herbicides.

Construction Scheduling

Planting must be done during planting windows, per the [*Standard Specifications*](#) to allow for maximum growth during the rainy season.

Woody Vegetation

Plant stock one gallon or smaller in size, and consider using polymers in the soil or supplement with other water-holding polymers during the first summer. Continue to monitor plants during the first 3 to 5 years to determine plant moisture needs and supplement as practical and necessary.

Grasses and Forbs

The ideal seeding window is specified in the [*Standard Specifications*](#) to take advantage of seasonal rainfall.

It is possible that native grasses will not be visible the first year because they develop their root systems first before putting out top growth. A provision for initial erosion control must be made while the native vegetation becomes established. This can take the form of erosion control matting or a cover crop such as sterile wheat.

Plant Establishment Maintenance and Monitoring

Maintenance of new plantings until they become established is critical to the success of revegetation projects. Landscape contracts must include provision for plant establishment and maintenance.

Plant Selection Including Plant Establishment (PSIPE) should be enforced in all contracts. Under this provision, the contractor maintains and guarantees plant survival for the first 1-3 years depending on the contract.

Allow funds for maintenance of the site until desirable plants become fully competitive with weeds (generally 3 to 5 years). Maintenance can include planting additional plants to meet coverage requirements. The Landscape Architect can arrange for contractors such as the Washington Conservation Corps or corrections crews to perform this maintenance. These provisions allow WSDOT to meet required standards of success in restoration permitting and to restore roadside functions after roadway construction.

Consider the following techniques:

- Selective weeding.
- Wicking with herbicides, or other selective herbicide treatments, where appropriate.
- Native prairies need regular disturbance in the form of mowing or fire to prevent invasion by woody species. Controlled burns might be done in coordination with local fire department training. Burn no more than 1/3 to 1/2 of the prairie acreage per year. This allows a refuge for insects (such as butterflies) to survive the disturbance.
- For prairie restorations, high mowing (6-12 inches) can be done once late winter/early spring growth starts - this can be as early as January in lowland Western Washington and again before seeds mature. Mowing during this time will encourage natives and cut back the nonnative species by removing the leaves, flowers, and immature seeds of fast-growing non-natives.

Monitor native prairie vegetation during the growing season. Native forbs and grasses go dormant during the dry season (July through September). Monitoring during this season will not provide complete plant community data.

Additional Sources of Information

M.G. Barbour, J.H. Burke, and W.D. Pitts. 1987. *Terrestrial Plant Ecology*, Benjamin/Commings, Inc. , Menlo Park, California.

Kelly M. Cassidy. 1997. Land Cover of Washington State: Description and Management. Volume 1. In: Washington State Gap Analysis Project Final Report (K.M. Cassidy, C.E. Grue, M.R. Smith, and K.M. Dvornich, eds.). Washington Cooperative Fish and Wildlife Research Unit, University of Washington, Seattle. 260 p.

Sarah S. Cooke (editor), 1997. *A Field Guide to the Common Wetland Plants of Western Washington and Northwestern Oregon*. Seattle Audubon Society. 417 p.

Jerry F. Franklin and C. T. Dyrness, *Natural Vegetation of Oregon and Washington*. Oregon State University Press. 1988.

Donald Harker, Sherri Evans, Marc Evans, and Kay Harker, *Landscape Restoration Handbook*, Lewis Publishers. Boca Raton, 1993.

National Research Council, *Restoration of Aquatic Ecosystems*, National Academy of Sciences, Washington D.C., 1992.

Chadwick D. Oliver and Bruce C. Larson, *Forest Stand Dynamics*, Update Edition, New York, John Wiley & Sons, Inc., 1996.

Roberta Parish, R. Coupé, Dennis Lloyd, and Joe Antos (editors). *Plants of Southern Interior British Columbia*. Redmond Washington: Lone Pine Publishing. 1996.

Jim Pojar and Andy MacKinnon (editors). *Plants of the Pacific Northwest Coast: Washington, Oregon, British Columbia and Alaska*. Lone Pine Publishing. 1994.

Ronald J. Taylor. *Sagebrush Country: A Wildflower Sanctuary*. Mountain Press. 1992.

General

Irrigation provides additional moisture to plants during establishment (3-5 years), during long dry periods, or in special cases, on a continuing basis. Irrigation is a high maintenance and high cost item; use only when absolutely necessary.

References

Backflow Prevention Assemblies Approved for Installation in Washington State. Washington State Department of Health.

Cross Connection Control Manual: Accepted Procedure and Practice. Pacific Northwest Section - American Water Works Association.

Design Manual, M 22-01, WSDOT

Standard Specifications for Road, Bridge and Municipal Construction, M 41-10, American Public Works Association and WSDOT [Metric](#) [English](#)

Resources

Olympia Service Center (OSC) Design Office Irrigation Specialist

Regional or OSC Landscape Architects

Regional or OSC Utilities Section

Regional or OSC Maintenance Offices

Definitions¹

approved Refers to an approval in writing by the health authority or other agency having jurisdiction.

atmospheric vacuum breaker(AVB) A device that contains a float check (poppet), a check seat and an air inlet vent. When water pressure is reduced to a gauge pressure of zero or below, the float check drops. This allows air to enter the device to prevent backsiphonage. It is designed to protect against backsiphonage only.

backflow Refers to the flow of water or other liquids, gases, or solids from any source back into the customer's plumbing system or the serving utility's water distribution system.

¹ *Cross Connection Control Manual: Accepted Procedure and Practice*

backflow prevention assembly Refers to a backflow preventer that is designed to be in-line tested and repaired, and to meet the head loss and flow requirements of the recognized approval authority. The assembly consists of the backflow prevention unit, two resilient seated shutoff valves, and test cock(s).

backpressure Refers to water pressure that exceeds the operating pressure of the purveyor's potable water supply.

backsiphonage Backflow due to a negative or reduced pressure within the purveyor's potable water supply.

check valve A generic term used for a variety of valves that specifically allow flow in only one direction.

conduit A pipe containing electrical wiring.

contamination An impairment of the quality of potable water (by sewage, industrial fluids, or waste) that creates an actual hazard to the public health through poisoning or the spread of disease.

cross connection Any actual or potential physical connection between a potable water line and any pipe, vessel, or machine containing a nonpotable fluid, or having the possibility of containing a nonpotable fluid, such that it is possible for the non-potable fluid to enter the water system by backflow.

double check valve assembly (DCVA) An approved assembly consisting of two independently operating check valves, loaded to the closed position by springs or weights, and having suitable connections for testing. It is installed as a unit with and between two resilient seated shutoff valves

potable water Water that is safe for human consumption and free from harmful or objectionable materials as described by the jurisdictional health authority.

pressure vacuum breaker assembly An approved assembly consisting of a spring loaded check valve loaded to the closed position, an independently operating air inlet valve loaded to the open position, and suitable connections for testing. It is installed as a unit with and between two resilient seated shutoff valves. It is designed to protect against backsiphonage only.

reduced pressure backflow assembly An approved assembly consisting of two independently operating check valves, spring loaded to the closed position, separated by a spring loaded differential pressure relief valve loaded to the open position, and having four suitable test cocks for checking the water tightness of the check valves and the operation of the relief valve. It is installed as a unit with and between two resilient seated shutoff valves.

service connection The piping connection by means of which water is conveyed from the serving utility's distribution main to a customer's premises.

sleeve A pipe containing other irrigation pipe. Also called *casing pipe*. (See Figure 820.1)

Planning

Source of Water

Sources of water for irrigation include municipal water systems and water pumped from a well, pond, stream, or irrigation district. When selecting a source of water, consider what permits and agreements might be needed as well as the cost and feasibility of bringing water from the source to the site. Show the location and water source on the irrigation plan. In some jurisdictions it might be necessary to calculate water use for the years of plant establishment. Calculate that cost and include it in the estimate.

Municipal Water

Document in the project file:

- Location for the service meter. Define by contacting the serving utility.
- Location and depth of the municipal water main .
- Available liters per minute and the static water pressure in megapascals (or pounds per square inch [psi]) at the proposed meter location. Include this information on the plan sheet.
- Preliminary cost estimate for water meter and connection fee, monthly fees, and cost of water. An example of an irrigation system water cost estimate is found in the Appendix.
- Cost savings that might be realized on landscape rehabilitation jobs where there have been prior meters. Check for existing meters, their age, condition, and connections to the main.
- Water service agreement from the water supplier and an electrical service agreement with the electrical supplier. Work with the Utilities Section to obtain utility agreements.
- Cost for connections in the cost estimate.

Well, Pond, Stream, or Irrigation District

Document in the project file:

- Desired location of pump (for pond, stream or irrigation canal only).
- Location and type of power source.
- Length of suction line required.
- Height of suction lift.
- Type of suction intake.
- Need for screening of contaminants.
- Provide pump data in accordance with the *Hydraulics Manual*.

Obtain the needed permit(s) from the jurisdictional authority for water withdrawal.

Check with the serving utility about pipe and backflow details required.

Design

System Controls

- In appropriate locations, use electric (110 volts), battery, wind, or solar operated automatic controllers.

System Components

Select products with proven desirable performance records. Consult with maintenance personnel to determine desirable products. When a system is designed using a certain product, include a note to the contractor stating that the system has been designed with that product; but the contractor may use other manufacturers' products that are approved by the Engineer as equal or better.

- A proprietary item request might be appropriate so that all components (for example, the same valve) in a maintenance area are the same. This allows for ease of maintenance and inventory control.
- Select durable, readily available, easy to operate, and vandal resistant irrigation components. Plastic rather than brass heads may be selected to discourage vandalism.
- Determine the size of service meter needed once the demand (liters per minute) is known.

- Meter water use for type of consumption where appropriate, especially at safety rest areas to determine irrigation versus restroom water use.

Layout

Perform a site analysis prior to layout design.

- Consider current and potential locations of power source, signs, guardrails, maintenance areas, planting areas, and so forth, when locating irrigation lines.
- Consider prevailing wind direction and velocity and its effect on spray patterns.
- Where practical, set sprinkler heads at least 0.6 m from trails and sidewalks, or use pop-up spray heads in order to minimize vandalism.
- Space sprinkler heads at a distance of 50 to 60% of their diameter of throw for groundcover and shrub areas. For turf areas, space them at a maximum of 50% of their diameter of throw.
- Install irrigation lines along slope contours rather than running downhill.
- Minimize the use of partial pattern heads and strip spray heads.
- Match precipitation rates for uniform coverage of the planting area.
- Balance head distribution evenly for each valve zone. Consider pressure change due to elevation and pressure loss from friction.
- For drip irrigation systems, install emitters in multiples at shrubs, and trees, to ensure a wider and more uniform distribution of water over the entire plant root area.
- Install drip emitters upslope of trees and shrubs on slopes.
- When using a subsurface dripline irrigation system, a self-cleaning pressure-compensating system is preferred to keep the dripline from plugging with soil particles. A dripline system that incorporates root intrusion treated components or chemical release water delivery is also a preferred system.
- When possible, mount automatic controllers inside a building, for security, in a location that is easily accessible to maintenance personnel. If it is not feasible to locate the controller inside a building, then locate it away from sprinklers and preferably at a location from which the irrigation system can be viewed in operation.

- Consider the need for winterization of irrigation systems to avoid freeze damage to system components.

Piping

Irrigation systems typically use PVC pipe. Refer to the *Standard Specifications for Road, Bridge and Municipal Construction* for irrigation pipe and installation specifications.

Minimize the number of pipe sizes in order to reduce the number of contract Bid Items, and the construction cost. Where practical, eliminate small quantities of one size of pipe by increasing the size to the next size used on the project.

Include pipe design calculations (Pressure Loss Calculations) in the project file. An example of irrigation system pressure loss calculations can be found in the Appendix.

See *Design Manual* for additional design documentation requirements.

Sleeves

When irrigation lines are to be installed under pavement, provide sleeves for pipes and wiring. Install sleeves prior to paving per *Standard Specifications for Road, Bridge and Municipal Construction*.

- Sleeves must have smooth interior walls (not corrugated) and may be Class 200 PVC pipe, “Drain Pipe ____Diam.” or other pipe material that meets the specific load requirements.
- Size the sleeve so that the inside diameter (ID) is at least 2.5 times the combined outside diameters (OD) of the pipe(s) that are to be in it.

See the following Figure for an example of piping inside a sleeve.

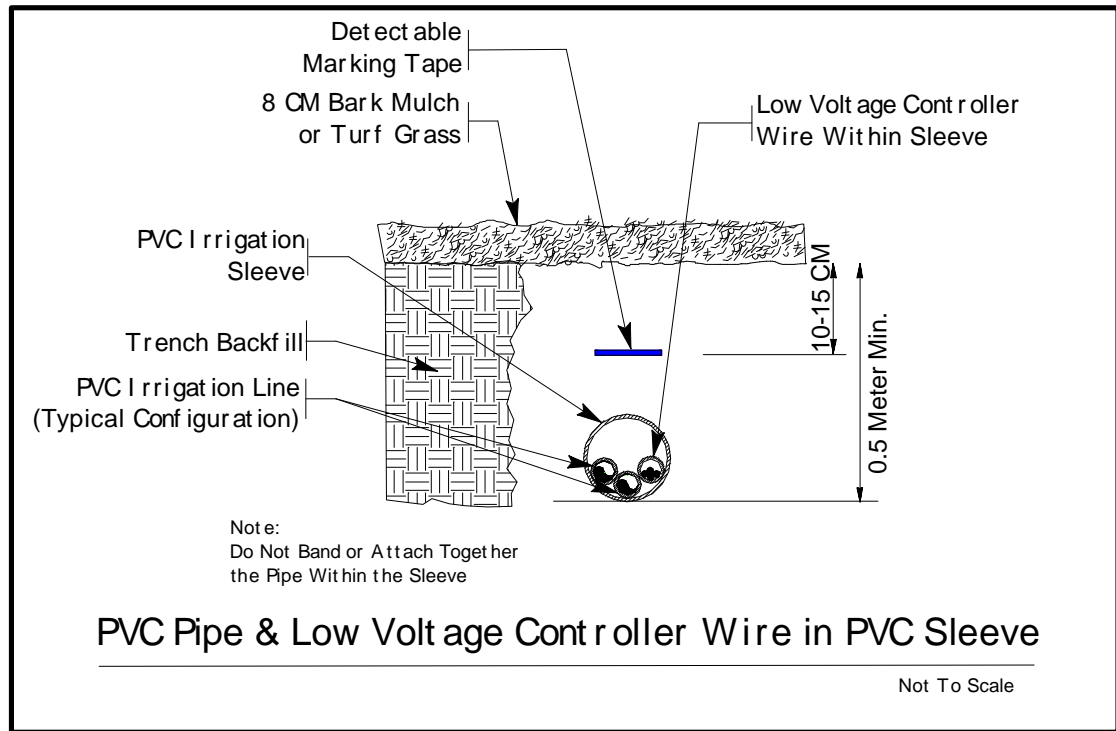


Figure 820.1 Irrigation Sleeve

Valves

Master Remote Control Valve

Master remote control valves are recommended for use in main lines, especially where a break in the main line is likely to produce significant erosion or hazard. The valves are installed just down flow from the meter so the mainline is pressurized.

For added protection from breaks in irrigation lines a flow sensor may be used to shut off the water. See the OSC Design Office Irrigation Specialist or the OSC Maintenance Office for more information.

Station Control Valves

Group valves in valve boxes for efficient maintenance access. Consider maintenance vehicle access when choosing locations.

Wiring

- See [*Standard Specifications for Road, Bridge, and Municipal Construction*](#) for wiring specifications.
- Provide additional wire runs (one spare wire to each valve) for backup power source.
- Low voltage controller wire may be placed in the sleeve along with irrigation piping.

- The main electrical supply lines (110 volts) must be installed in a separate conduit.
- Use wire splices as specified in Section 9-15 of the *Standard Specifications for Road, Bridge, and Municipal Construction*. Check with the OSC Design Office Irrigation Specialist if additional information is needed.

Cross Connection Control Devices

The protection of public potable water supplies is accomplished by eliminating or controlling actual and potential cross connections (backflow). Cross connections might allow contamination to reverse flow into a potable water system or aquifer. Do not allow water to flow through the backflow device until the device has been tested by the serving utility. When a facility such as a safety rest area has no serving utility, backflow devices on wells are tested by an inspector with certification through Washington State Department of Health. Contact the OSC Maintenance Office for information.

Types of mechanical backflow devices are:

- Reduced pressure backflow assembly (RPBA).
- Double check valve assembly (DCVA).
- Pressure vacuum breaker assembly (PVBA).
- Atmospheric vacuum breaker (AVB).

All four types of mechanical devices provide adequate protection against a **low degree** of hazard contamination if installed correctly. Therefore, when selecting the type of device to be used against a low degree of hazard contamination, consider initial cost, serving utility requirements, and maintenance.

Of these four mechanical devices, the RPBA affords the greatest protection against backflow. The RPBA is the **only** mechanical device to be used where a backflow would produce a **high degree** of contamination hazard. The local serving utility is the ultimate approval authority for backflow prevention within their jurisdiction. It is therefore necessary to contact the local serving utility to ascertain what type of device they will require as a minimum.

Once the appropriate type of device has been determined, the device is selected from the current list in *Backflow Prevention Assemblies Approved for Installation in Washington State*, published and periodically updated by the Department of Health. Consult the OSC Design Office Irrigation Specialist if you have questions.

A bore-sighted drain (sloped downward) to daylight must be provided

to ensure positive drainage whenever there is an underground vault installation of an acceptable backflow device. The vault drain must be sized in accordance with the requirements of the *Cross Connection Control Manual: Accepted Procedure and Practice*.

Construction

As a minimum, all mechanical backflow devices are installed in accordance with the most current copy of the *Cross Connection Control Manual: Accepted Procedure and Practice*, published by the Pacific Northwest Section - American Water Works Association. In addition, they must be installed in accordance with the [*Standard Specifications for Road, Bridge, and Municipal Construction*](#), and their manufacturer's recommendations.


Maintenance

Irrigation systems require regular maintenance to function properly.

- Backflow prevention devices are to be tested annually by an inspector with certification through the Washington State Department of Health. Contact the OSC Maintenance Office for information.
- Winterize irrigation lines by draining or blowing out the lines prior to the first winter freeze.
- Check system as part of Spring start-up and throughout the season.
- Repair irrigation system promptly to avoid water loss and to prevent erosion from broken water lines.

Appendix A

Slope Visualization Diagram

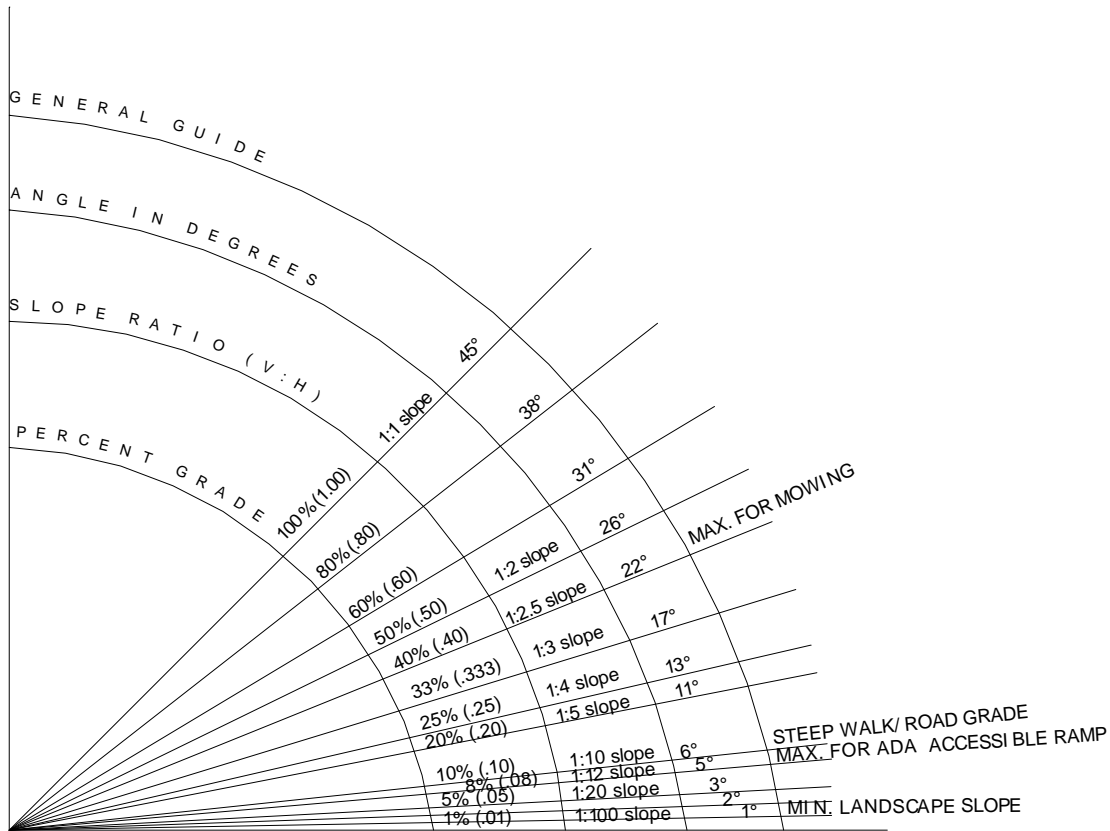

Note:

- Maximum slopes for cut and fill depend upon the materials involved. See the region's Materials Engineer and the [Standard Specifications for Road, Bridge and Municipal Construction](#) 2-03.3(14) for guidance.
- The preferred slope for mowing is 1:3 or flatter. Refer to the *Maintenance Manual* for more specific information.

accelerated climax plant community The process of restoring a site to a desirable climax plant community in reduced time when compared to natural processes.

accessible route of travel This is defined in the *Washington Administrative Code* (WAC) 51-40 as “a continuous unobstructed path connecting all accessible elements and spaces in an accessible building or facility that can be negotiated by a person using a wheel chair and that is usable by persons with other disabilities.”¹

ADA *Americans with Disabilities Act* 42 U.S.C. 12201
<http://www4.law.cornell.edu/uscode/42/ch126.html#PC126>

aesthetics Evaluations and considerations with the sensory quality of resources (sight, sound, smell, taste, and touch) and especially with respect to judgment about their pleasurable qualities.²

allogenic succession Changes in the composition of the plant community as a result of environmental forces.³

alluvial fan A sloping fan-shaped mass of sediment deposited by a stream where it emerges from an upland onto a plain.

anadromous Born in fresh water, migrating to and living in salt water, and then returning to freshwater to reproduce.⁴

ancillary services Those secondary services provided at safety rest areas that include, but are not limited to, vending machines, interpretive signing, telephones, recreational vehicle (RV) sanitary disposal facilities, trails, scenic viewpoints, commercial and public information displays, and visitor information centers.

angle of repose The angle between the horizontal and the maximum slope that a soil assumes through natural processes.

atmospheric vacuum breaker(AVB) A device that contains a float check (poppet), a check seat and an air inlet vent. When water pressure is reduced to a gauge pressure of zero or below, the

¹ Accessibility Design for All, p. 6.

² U. S. Department of the Interior, Bureau of Land Management. BLM Manual: visual resource management, Washington D. C. 1977.

³ Oliver and Larson, p. 29.

⁴ Johnson and Stipula. 1993. p. G1

float check drops. This allows air to enter the device to prevent backsiphonage. It is designed to protect against backsiphonage only.

autogenic succession Changes in the composition of a plant community due to interplant interactions (facilitation or competition).⁵

backflow Refers to the flow of water or other liquids, gases, or solids from any source back into the customer's plumbing system or the serving utility's water distribution system.

backflow prevention assembly Refers to a backflow preventer that is designed to be in-line tested and repaired, and to meet the head loss and flow requirements of the recognized approval authority. The assembly consists of the backflow prevention unit, two resilient seated shutoff valves, and test cock(s).

background The distant part of a landscape. Generally, the landscape area located from 4 miles to infinity from the viewer.⁶

backpressure Refers to water pressure that exceeds the operating pressure of the purveyor's potable water supply.

backsiphonage Backflow due to a negative or reduced pressure within the purveyor's potable water supply.

berm The continuous artificial contouring of a slope or water-channel bank.⁷

Best Management Practices (BMPs) Physical, structural, and/or managerial practices that, when used singly or in combination, reduce the downstream quality and quantity impacts of stormwater.⁸

biofiltration the cleaning of surface water using plants and other biological methods to extract or retain sediment and pollutants.

bioregion A geographic region based on topography and biological similarities such as watersheds, plant/animal ecosystems, or relative elevations.

⁵ Oliver and Larson.

⁶ U. S. Department of Agriculture, U. S. Forest Service, *Landscape Aesthetics: A Handbook for Scenery Management*, December 1995.

⁷ Hugo Schiechl, *Bioengineering for Land Reclamation and Conservation*, University of Alberta Press, 1980.

⁸ *Highway Runoff Manual*, M 31-16. WSDOT, pp Glossary 1-2.

- biosolids** Treated wastewater residuals or solids used as a soil amendment.
- blend** To create a balanced, visually harmonious interface between adjacent elements. A roadside treatment strategy that integrates roadside elements to preserve roadside character continuity.
- buffer** The zone contiguous with a sensitive area that is required for the continued maintenance, function, and structural stability of the sensitive area. The critical functions of a riparian buffer (those associated with an aquatic system) include shading, input of organic debris and coarse sediments, uptake of nutrients, stabilization of banks, interception of fine sediments, overflow during high water events, protection from disturbance by humans and domestic animals, maintenance of wildlife habitat, and room for variation of aquatic system boundaries over time due to hydrologic or climatic effects. The critical functions of terrestrial buffers include protection of slope stability, attenuation of surface water flows from storm water runoff and precipitation, and erosion control.⁹
- check dam** a small barrier, such as quarry spalls, sand bags, or silt fencing, that slows water velocity and allows solids to settle out behind the barrier.
- check valve** A generic term used for a variety of valves that specifically allow flow in only one direction.
- clay** Mineral soil particles with a diameter of less than 0.002 millimeter. A fine-grained soil that has a high plasticity index in relation to liquid limits.¹⁰
- clear zone** The total roadside border area, starting at the edge of the traveled way, available for use by errant vehicles.
- climax vegetation** Relatively stable vegetation in equilibrium with its environment and with good reproduction of the dominant plants.¹¹ A stable end-point to plant succession (“steady state”) where a group of species predominate and replaces itself.¹²
- coherence** Quality of state of being united in principles and relationships or to be logically and aesthetically connected.

⁹ *Ibid*

¹⁰ Donahue, Roy L., John C. Shickluna, and Lynn S. Robertson, *Soils: An Introduction to Soils and Plant Growth*, Prentice-Hall, Inc., Englewood Cliffs, New Jersey, 1971, p. 509.

¹¹ *Ibid*, p. 510.

¹² Oliver and Larson, p. 147.

- cognition** The mental process or function by which knowledge is acquired.
- color** The property of reflecting light of a particular wavelength that enables the eye to differentiate otherwise indistinguishable objects. A hue (red, green, yellow, blue, and so on). as contrasted with a value (black, white, or gray).¹³
- compensatory mitigation** The attempt to compensate for wetlands impacts. It usually involves the creation, preservation, restoration, or enhancement of a wetland to replace functions lost due to unavoidable impacts.
- complexity** The multiple qualities in a landscape that provide visual interest such as the combination of form, color, and texture.
- compost** Stable, mature, decomposed organic solid waste that is the result of the accelerated, aerobic biodegradation and stabilization under controlled conditions. The result has a uniform, dark, soil-like appearance.
- conduit** A pipe containing electrical wiring.
- control** The driver's ability to safely drive the vehicle.
- constructed wetlands** Areas "created or restored specifically to treat either point or nonpoint source pollution wastewater."¹⁴ Although a constructed wetland might look the same as a created wetland, different regulations apply. Design and maintenance of constructed wetlands is determined according to their stormwater and hydraulic functions. Vegetation is used to maximize the desired functions.
- contamination** An impairment of the quality of potable water (by sewage, industrial fluids, or waste) that creates an actual hazard to the public health through poisoning or the spread of disease.
- contour** An imaginary line on the surface of the earth connecting points of the same elevation.
- contour interval** The difference in elevation between two contours.¹⁵
- contrast** Diversity or distinction of adjacent parts. Effect of striking differences in form, line, color, or texture of a landscape.

¹³ U. S. F. S., December 1995.

¹⁴ TRB, 1996

¹⁵ Morris M. Thompson, *Maps for America*, U.S. Department of Interior, Geological Survey National Center, Reston, Virginia, 1987.

corridor continuity The overall coordination and sequence of visual features as experienced by the roadway user.

corridor management plans A written document that specifies the actions, procedures, controls, operational practices, and administrative strategies to maintain the scenic, historic, recreational, cultural, archeological, and natural qualities of a Scenic and Recreational Highway.

created wetlands Those wetlands that have been constructed on a nonwetland site specifically to compensate for wetland losses permitted under Section 404 of the Clean Water Act.¹⁶ Created wetlands can also be created to compensate for impacts under local permits or WSDOT directive. Wetlands can also be accidentally created as a result of construction activities.

critical area See *sensitive area*.

critical habitat (A) Specific areas within the geographical area occupied by the species, at the time it is listed, on which are found those physical or biological features both essential to the conservation of the species, and which may require special management considerations or protection. (B) Specific areas outside the geographical area occupied by the species, at the time it is listed, that the U. S. Secretary of the Interior or the U. S. Secretary of Commerce determines are essential for the conservation of the species.¹⁷

cross connection Any actual or potential physical connection between a potable water line and any pipe, vessel, or machine containing a nonpotable fluid, or having the possibility of containing a nonpotable fluid, such that it is possible for the non-potable fluid to enter the water system by backflow.

cross section The representation of a landform as it would appear if cut by an intersecting plane.

cultural element Attributes in a human-altered landscape; generally, scenically positive cultural elements, most of which have historical backgrounds or nostalgic connotations. Examples include split-rail fences, stone walls, barns, orchards, hedgerows, and cabins.¹⁸

¹⁶ TRB, 1996

¹⁷ Endangered Species Act (ESA), 1973

¹⁸ U. S. F. S., December 1995.

cut That part of the ground surface that, when graded, is lower than the original ground.¹⁹

cuttings Live plant material without a previously developed root system. Source materials for cuttings should be dormant when the cutting is taken.

datum In surveying, a reference point, line, or surface for computing or correlating the results of surveys. In surveying, there are two principal types of datums: vertical and horizontal.

dBA (A-Weighted Sound Level) The sound pressure levels in decibels measured with a frequency weighting network corresponding to the A-scale on a standard sound level meter as specified by ANSI S1.4-1971. The A-scale tends to suppress lower frequencies (below 1,000 Hz) and best approximates the sound as heard by the normal human ear.

DCTED Department of Community, Trade, and Economic Development. Their website is found at:
<http://www.wa.gov/cted/> Provides leadership and support to Washington and its diverse communities to excel as places to live, work, play, and do business.

decibel A decibel is a unit used to measure and describe the intensity of sound. A decibel is one-tenth of a Bel. A Bel is defined as the common logarithm of the ratio of two powers. Mathematically, a decibel is defined as:

$$\text{dB} = 10 \log_{10} (P_1/P_2),$$

Where P_2 is the reference pressure and is equal to $2 \times 10^{-5} \text{ N/m}^2$ (0.0002 μ bars).

decision sight distance The sight distance required for a driver to 1) detect an unexpected or difficult-to-perceive information source or hazard, 2) interpret the information, 3) recognize the hazard, 4) select an appropriate maneuver, and 5) complete the maneuver safely and efficiently.

delineated wetland A wetland whose boundary has been identified by a qualified biologist using a standard delineation methodology evaluating soils, vegetation, and hydrology. A right of entry might be required to formally delineate a wetland for project purposes if it does not occur entirely on WSDOT right of way. The delineated boundary is flagged in the field and surveyed.

¹⁹ Steven Strom and Kurt Nathan, *Site Engineering for Landscape Architects*, Van Nostrand Reinhold, New York, 1992.

The biology report will include the delineation survey with flag locations and numbering.

Design Clear Zone The minimum target value used in highway design.

designated lands Lands that have been officially recognized or identified for their special functions. Many of these are managed for environmental functions as well as other uses, such as recreation. These can include: National Wildlife Refuges; National Forests; National Parks; state, county, and local jurisdiction parks; Wild and Scenic Rivers; Scenic and Recreational Highways; designated critical habitat for threatened or endangered species such as spotted owls; or priority habitat areas such as oak woodlands, agricultural lands, and sensitive plant habitat.

detention facility An above or below ground facility, such as a pond or tank, that temporarily stores stormwater runoff and subsequently releases it at a slower rate than it is collected by the drainage facility.

detention pond A type of drainage facility designed to hold surface and stormwater runoff for a short period of time and then release it over time via adjacent surface water bodies or aquifers.

ditches Narrow depressions designed to collect, convey, and discharge stormwater runoff from roadway surfaces, adjacent right of way, and groundwater discharge from adjacent slopes. Many ditches are diverted streams and creeks. Because of this hydraulic function, it is not uncommon to see wetland (hydrophytic) vegetation growing in roadside ditches.

double check valve assembly (DCVA) An approved assembly consisting of two independently operating check valves, loaded to the closed position by springs or weights, and having suitable connections for testing. It is installed as a unit with and between two resilient seated shutoff valves

ecological succession The natural tendency of plant communities to evolve over time.

elevation Vertical distance of a point above or below a reference surface or datum.²⁰

²⁰ Thompson, 1987

enclose A roadside treatment strategy, the aim of which is a more or less permeable buffer between two adjacent elements, typically the roadway and adjoining lands. Roadside treatments, such as berms, structures, or vegetation, are used to provide visual buffers along both sides of the road.

endangered species Any species of plant or animal that is in danger of extinction throughout all or a significant portion of its range.²¹

enhancement Any improvement of a structural component to increase the level of ecological functioning of a site

Environmental Resource Area Areas that have been identified in the field by a biologist as having high environmental resource value. Environmental Resource Areas may include (but are not limited to): stream corridors; oak woodlands, or other high quality habitat areas designated as locally or regionally important; known habitats for state or federal endangered, threatened, or priority species; and rare or sensitive plant communities.

erosion The wearing away of the land surface by running water, wind, ice, or other geological agents, including such processes as gravitational creep. Also detachment and movement of soil or rock fragments by human and animal activities.

erosion prevention and sediment control Any temporary or permanent measures taken to reduce erosion, control siltation and sedimentation, and ensure that sediment-laden water does not leave a site.

exotic species A species found in but not native to a particular area.

expectancy The driver's readiness to respond to events, situations, or the presentation of information. It is primarily a function of the driver's experience.

expose A roadside treatment strategy, the aim of which is to preserve or open a visual sight line, or remove vegetation for operational purposes, such as in the Design Clear Zone.

facility All or any portion of buildings, structures, vehicles, equipment, roads, walks, parking lots, or other real or personal property or interest in such property.²²

²¹ ESA, 1973

²² Subpart A, 49 CFR Part 27.

fascine A tied bundle of plant stems or branches, laid in a trench or a terrace on the contour and staked into position. Used to slow water velocities, trap sediment and establish vegetation. Used on basically stable slopes that have a shallow, unstable surface layer.

feature A visually distinct or outstanding part, quality, or characteristic of a landscape.

fill That part of the ground surface that, when graded, is higher than the original ground.²³

finish grading Minor changes to finalize a prepared earth surface to its desired grade.

fixed service item A stationary facility or structure such as a utility box or light standard.

forb An herbaceous plant, such as clover, which is not a grass, sedge, or rush.

foreground Detailed landscape generally found from the observer to 100 meters (300 feet) away.

form The mass or shape of an object. Usually considered to be three dimensional.

friable readily crumbled

genotype The genetic make-up of an organism.

grading Modification of the ground surface by cuts and/or fills.

groundcover Low-growing plants that form a dense, extensive growth and tend to prevent weeds and soil erosion.

groundwater Water that occurs below the surface of the earth, which is contained in pore spaces. It is either passing through or standing in the soil and underlying strata and is free to move under the influence of gravity.²⁴

guidance The process of directing the course of the driver through signing and other visual clues.

gully A channel or miniature valley cut by concentrated runoff but through which water commonly flows only during and immediately after heavy rains or snowmelt.

²³ Strom and Nathan, 1992.

²⁴ TRB, 1996

habitat The environment occupied by individuals of a particular species, population, or community.²⁵

herbaceous plant Any flowering plant except those developing persistent woody bases and stems above ground.

humus Decomposed organic matter that remains once visible plant structure can no longer be determined.

hydraulic conveyance system Natural and man made drainage facilities that collect, contain, and provide for the flow of surface and stormwater from the highest elevations down to a receiving water. The natural elements of the conveyance system include swales, and small drainage courses, streams, rivers, lakes, and wetlands. The man made elements of the conveyance system include gutters, ditches, pipes, channels, and most retention/detention facilities.²⁶

hydrology The science that relates to the occurrence, properties, and movement of water on the earth. It includes water found in the oceans, lakes, wetlands, streams, and rivers, as well as in upland areas, above and below ground, and in the atmosphere.²⁷

impact An action that adversely affects a wetland or other ecosystem; for example, road construction, timber clearing, or agricultural activities that result in wetland conversion or degradation.²⁸

impervious surface A hard surface area that either prevents or retards the entry of water into the soil. Common impervious surfaces include roof tops, walkways, driveways, parking lots, concrete or asphalt paved roadways, gravel roads, packed earthen materials, and oiled surfaces.

indicator One of the specific environmental attributes measured or quantified through field sampling, remote sensing, or compilation of existing data from maps or land use reports, used to assess ecosystem condition or functions or exposure to environmental stress agents.²⁹

infiltration The downward movement of water from the surface to the subsoil.

²⁵ TRB, 1996

²⁶ Highway Runoff Manual, WSDOT

²⁷ TRB, 1996

²⁸ TRB, 1996

²⁹ TRB, 1996

information display A kiosk that includes a map of Washington, local travel services, and attractions. In selected safety rest areas, commercial travel information is provided. The display may be free standing or mounted.

insertion loss The actual acoustical benefit derived from a noise barrier.

intactness Untouched or unaltered, especially by anything that harms or diminishes its character.

integrated vegetation management: (IVM) A vegetation management approach focusing on using long-term solutions to establish stable, low-maintenance roadside plant communities compatible with highway safety, maintenance objectives, neighbors' concerns, and environmental quality, while at the same time deterring invasion of undesirable plants.

interpolation The determination of the elevation of a location between two known points. Done by calculating the slope between known points and using the horizontal distance from the known point to the intermediate point to calculate the elevation of the intermediate point.

invasive vegetation Those (typically) nonnative plant species that will often outcompete native plant communities.

jurisdictional wetlands All naturally occurring wetlands, wetlands unintentionally created as the result of construction activities, and those created specifically for the compensation of wetland losses. These wetlands are regulated by the Army Corps of Engineers and local jurisdictions.

kiosk A conveniently located structure accommodating ancillary services such as vending machines, traveler information, or telephones. The kiosk might also include a sheltered area for serving refreshments on a donation basis.

landscape An area composed of interacting ecosystems that are repeated because of geology, land form, soils, climate, biota, and human influences throughout the area. Landscapes are generally of a size, shape, and pattern that is determined by interacting ecosystems.³⁰

leaching The removal of materials (CaCO_3 , MgCO_3 , and other more soluble materials) in solution from the soil.

³⁰ U. S. F. S., December 1995.

legibility The quality in a landscape that allows the viewer to understand or comprehend it and to make decisions about future actions.

Leq A statistical descriptor that provides a single number to describe the varying traffic noise levels. It is a constant, average sound level that, over the specified period of time, contains the same amount of sound energy as the varying levels of the traffic noise.

line The path, real or imagined, that the eye follows when perceiving abrupt differences in form, color, or texture. Within landscapes, lines may be found as roads, ridges, skylines, structures, changes in vegetative types, or individual trees and branches.³¹

listed species Any species listed by a state or federal agency as threatened or endangered under the Endangered Species Act of 1973.

live poles A form of cutting taken from woody vegetation with a diameter greater than 50 mm (2 inches).

live stakes A form of cutting taken from one to two year old woody vegetation with a diameter of less than 50 mm (2 inches).

loam A soil texture class that contains 7 to 27 percent clay, 28 to 50 percent silt, and less than 52 percent sand.³²

maintenance pull-off A widened shoulder area near fixed service items. Suggested width 4 meters minimum. Suggested length 30 meters maximum.

managed succession A technique that uses management activities to modify the rate and direction of succession.

microorganisms Forms of life that are either too small to be seen with the unaided eye, or are barely discernible.³³

middleground The zone between the foreground and the background in a landscape. The area located from 100 meters to 4 miles from the observer.

migration corridor An area that is usually used by migrating wildlife to move between suitable habitat.

³¹ BLM, 1977

³² Ibid, p. 536.

³³ Ibid, p. 538.

monitoring The collection of information after construction to assess if the replacement project is successful and to keep the regulatory agencies and construction agency informed about the status of the replacement project.³⁴

mottling Soils irregularly marked with spots of color. The presence of orange mottling usually indicates soils that have been through periods of saturation interspersed with periods where the soil had dried out.

mycorrhizae A beneficial group of fibrous fungi that engulf soil particles and pore spaces to absorb water and nutrients in solution and transfer this solution to the roots of plants. In effect, they multiply the plants' root systems many times.

mystery Characteristics in a landscape that excite wonder, curiosity, or surprise.

native plant A plant occurring naturally in a particular region, ecosystem, or habitat at the time of European settlement.

natural wetlands Wetlands in existence due to natural forces alone, or unintentionally developed through construction or management practices. Natural wetlands can be found in unusual areas, including filled areas, ditches, borrow pits, ponds, and agricultural fields. Natural wetlands are protected by federal, state, and local regulations as well as WSDOT's internal policies. (See Division 2.)

navigation Trip planning and execution.

nonjurisdictional wetlands Nonjurisdictional wetlands include those artificial wetlands intentionally created from nonwetland sites, including, but not limited to, irrigation and drainage ditches, canals excavated in uplands, stormwater detention ponds, wastewater treatment facilities created in uplands, and certain agricultural activities and landscape amenities created in uplands. Grass-lined swales and wastewater treatment facilities can be constructed in wetlands but must be so designated and specifically designed for water treatment purposes. Mitigation will be required to compensate for the wetland lost to such a facility

old growth forest A late successional or climax stage in forest development. In western Washington, ancient or old growth forests have a canopy of very large living conifers, shade-

³⁴ TRB, 1996

tolerant trees beneath the canopy, and abundant large snags and logs.³⁵

pioneer species Fast growing plants that are quick to establish on poor soils. Nodules on their roots fix nitrogen giving them a competitive edge in disturbed soil environments.

plant association A particular, consistent group of species growing in a particular, consistent type of habitat.

plant community A general term describing the group of plants growing in an area.

plant material Trees, shrubs, ground covers, cuttings, live stakes, live poles, rhizomes, tubers, rootstock, and seedlings are referred to collectively as “plants” or “plant material.”

plant succession Directional, cumulative change in the species that occupy a given area through time.⁵

point of interest A scenic, historical, natural, or other attraction of sufficient interest to travelers to warrant construction of a pullout and/or viewing area within WSDOT right of way. The site might include interpretive displays, potable water, or other ancillary services. A Point of Interest might be located within a larger roadside park or safety rest area.

pollutant An element that enters a biological pathway or becomes concentrated to the extent that it might cause injury to living organisms or the functioning of environmental systems.

pore space Total space not occupied by soil particles in a bulk volume of soil, commonly expressed as a percentage.³⁶

potable water Water that is safe for human consumption and free from harmful or objectionable materials as described by the jurisdictional health authority.

pressure vacuum breaker assembly An approved assembly consisting of a spring loaded check valve loaded to the closed position, an independently operating air inlet valve loaded to the open position, and suitable connections for testing. It is installed as a unit with and between two resilient seated shutoff valves. It is designed to protect against backsiphonage only.

profile The representation of a landform seen from the side.

³⁵ Norse, Elliott A. *Ancient Forests of the Pacific Northwest*, Washington, DC: Island Press. 1990. p. 287.

³⁶ Ibid, p. 546.

old growth forest A late successional or climax stage in forest development. In western Washington, ancient or old growth forests have a canopy of very large living conifers, shade-tolerant trees beneath the canopy, and abundant large snags and logs.³⁷

ramp Any directional route of pedestrian travel having a running slope between 2% and 8.3%.

receiver Any human that could potentially experience wayside noise from vehicles on a roadway at a given location.

receptor A coordinate point in three dimensional space for which the decibel level is either measured or calculated. Receptor may also be referred to as a “receiver point”.

recreational vehicle (RV) A general term used to describe motorized vehicles designed for pleasure travel. The cabin design frequently includes sleeping, eating, and toilet facilities.

recreational vehicle account In Washington, an account funded by an annual recreational vehicle license fee. Proceeds fund the construction, maintenance, and operation of RV sanitary disposal facilities in safety rest areas on federal-aid highways as authorized by RCW 46.68.

Recreational Vehicle Citizens Advisory Committee A volunteer advisory committee established under RCW 46.10.063 which provides for input from “citizen representatives of the recreational vehicle user community.” The committee provides guidance on the expenditure of funds from the Recreational Vehicle Account and advises WSDOT on operation of sanitary disposal facilities.

reduced pressure backflow assembly An approved assembly consisting of two independently operating check valves, spring loaded to the closed position, separated by a spring loaded differential pressure relief valve loaded to the open position, and having four suitable test cocks for checking the water tightness of the check valves and the operation of the relief valve. It is installed as a unit with and between two resilient seated shutoff valves.

reference site An established undisturbed natural site that is used as a comparative design guide to help determine the desired plant composition and species densities for the created, or enhanced project site. It should be located near the project site, preferably

³⁷ Norse, Elliott A. *Ancient Forests of the Pacific Northwest*, Washington, DC: Island Press. 1990. p. 287.

within the same watershed, and have similar landscape setting, hydrology and topography.

restoration Ecological restoration is the process of assisting the recovery and management of ecological integrity. Ecological integrity includes a critical range of variability in biodiversity, ecological processes and structures, regional and historical context, and sustainable cultural practices.³⁸

retention The process of collecting and holding surface and stormwater runoff with no surface outflow.

retention/detention facility (R/D) A type of drainage facility designed either to hold water for a considerable length of time and then release it by evaporation, plant transpiration, and /or infiltration into the ground; or to hold surface and stormwater runoff for a short period of time and then release it to the surface and stormwater management system.

retention pond A type of drainage facility designed to hold water for a considerable length of time allowing it to evaporate or infiltrate into the soil.

rhizome A root-like, usually horizontal stem, growing under or along the ground that sends out roots from its lower surface and leaves, or shoots from its upper surface. The primary means by which some plants spread or reproduce.

rills A small, intermittent water course with steep sides, usually only a few inches deep.

riparian The interface of aquatic and terrestrial systems in flood plains, rivers, and streams. Riparian systems are valued for diverse functions such as flood reduction, groundwater supply, streambank stabilization, habitat and migration corridors for wildlife, erosion control, and preservation of water habitats.³⁹

ripping Deep cultivation using specialized soil ripping equipment, usually done on compacted soils to increase pore space and improve soil structure for plant growth and infiltration of surface water.

roadside classification Any of five classifications given to a route or stretch of roadway through a review process conducted by WSDOT, and documented in the WSDOT “Roadside Classification Log.” Roadside character classifications fall within

³⁸ <http://nabalu.flas.ufl.edu/ser/definitions.html>

³⁹ TRB, 1996. p. 76.

two categories: natural and built. *Natural* includes the Open and Forest roadside character classification. *Built* includes the Rural, Semiurban, and Urban roadside character classifications.

roadside function: Any activity or role for which the roadside is specifically required, suited and used.

roadside: The *roadside* is the area outside the traveled way. This applies to all lands managed by WSDOT and may extend to elements outside the right of way boundaries.⁴⁰ This includes unpaved median strips and auxiliary facilities such as rest areas, roadside parks, viewpoints, heritage markers, pedestrian and bicycle facilities, wetlands and their associated buffer areas, stormwater treatment facilities, park and ride lots, and quarries and pit sites.

roadside park A roadside user facility for safe vehicular parking off the traveled way. These sites might be equipped with features or elements such as a point of interest, picnic tables, and/or chemical toilets. Unlike a safety rest area, a roadside park does not *necessarily* provide a permanent rest room building.

roadside partner A person who's work influences or impacts the roadside either directly or indirectly. Examples include but are not limited to: Architects, Environmental Offices, Heritage Corridors Program, Hydraulics Office, Landscape Architects, and Maintenance personnel.

roadside restoration The use of planning, design, construction, and maintenance activities to restore roadside plant communities according to designated roadside character and *Roadside Classification Plan* provisions.

roadside treatment strategies Conceptual design strategies used to coordinate implementation of roadside guidelines and fulfill roadside functions. The three basic treatment strategies are enclose/screen, expose, and blend.

roadway The roadway is the portion of a highway, including shoulders, for vehicular use. A divided highway has two or more roadways.

⁴⁰ WSDOT owns and manages the land within the right of way boundaries. WSDOT also owns, or has partial investment in, properties outside of the right of way boundaries; for example, wetland mitigation sites. In addition, WSDOT has an interest in elements outside the right of way boundaries which may affect roadway safety.

runoff That portion of the precipitation on a drainage area that is discharged as overland flow. Types include surface flow, groundwater flow, and seepage.

Safety Rest Area Roadside Master Plan A map of existing and projected safety rest areas and roadside parks. The Master Plan considers a 20 year planning horizon.

safety rest area (SRA) A roadside facility equipped with permanent rest room building(s), parking area, potable water, picnic tables, refuse receptacles, illumination, telephones, and other ancillary services. SRAs might include traveler information.

Safety Rest Area Team A WSDOT working group representing various divisions, regions, service centers, and offices responsible for safety rest area planning, programming, design, construction, maintenance, and operation. The team assists the Heritage Corridors Program in the development of short and long term plans and budgets.

sand A mineral soil particle between 0.05 and 2.0 mm in diameter. A soil textural class.⁴¹

scale The degree of resolution at which ecological processes, structures, and changes across space and time are observed and measured.

Scenic and Recreational Highways A public road having special scenic, historic, recreational, cultural, archeological, and/or natural qualities that have been recognized as such through legislation or some other official declaration. The terms “byway,” “road,” and “highway” are synonymous. They are not meant to define higher or lower functional classifications or wider or narrower cross-sections. Moreover, the terms State Scenic Byway, National Scenic Byway, or All-American Road refer not only to the road or highway itself but also to the corridor through which it passes.

screen The use of roadside treatments such as vegetation, berms, or walls to visually block undesirable views.

section See *cross-section*.

seedlings Plants grown from cuttings, seeds, or other approved propagation methods. They are generally under 3 years old and under 600 mm (2 ft) in height. Measurement is by height,

⁴¹Donahue, et al., p. 550.

in 75mm (3inch) increments, or by age and number of times transplanted.

sensitive areas (also called critical areas) Places in the landscape that are subject to natural hazards or that support unique, fragile, or valuable natural resources. In many cases, these areas have been designated as sensitive by local jurisdictions under the state Growth Management Act (GMA) and thus may have special regulations attached to them. Each jurisdiction has its own definition of what constitutes a sensitive area and has its own set of regulations that address the restrictions associated with these areas.

The Shoreline Management Act and Growth Management Act include as nonjurisdictional those wetlands created after July 1, 1990, that were unintentionally created as a result of the construction of a road, street, or highway. WSDOT has a “no net loss” policy regarding wetlands and will mitigate impacts to wetlands created after that date.

These areas can be highly susceptible to disturbance. Examples of sensitive areas include: streams, wetlands, steep slopes, erosion hazard areas, coal mine hazard areas, landslide hazard areas, seismic hazard areas, and floodplains, and smaller watersheds feeding into shellfish harvest areas.

service connection The piping connection by means of which water is conveyed from the serving utility’s distribution main to a customer’s premises.

settleable solids (SS) Settleable solids are the materials which settle out of suspension within a defined period (typically one hour). It is reported on a volume basis (milliliter per liter, mL/L), but can also be reported on a weight basis (milligrams per liter, mg/L).

shape Contour, spatial form, or configuration of a figure. Shape is similar to form, but shape is usually considered to be two-dimensional.

shrub A low, woody plant having several stems.

sight distance The length of highway visible to the driver.

silt A mineral soil separate consisting of particles of 0.05 and 0.002 mm in diameter. A soil textural class.⁴²

⁴² Ibid, p. 552.

sleeve A pipe containing other irrigation pipe. Also called *casing pipe*. (See Figure 840.1)

soil The unconsolidated mineral and organic matter on the surface of the earth that has been subjected to and influenced by genetic and environmental factors of parent material, climate (including moisture and temperature effects), macro and microorganisms, and topography, all acting over a period of time and producing a product – soil – that differs from the material from which it is derived in many physical, chemical, biological, and morphological properties and characteristics.⁴³

soil erosion The part of the overall process of denudation that includes the physical breakdown, chemical dissolving, and transportation of material by agents such as water, wind, ice, and gravity.⁴⁴

soil horizons A layer of soil approximately parallel to the land's surface and differing from adjacent genetically related layers in physical, chemical, and biological properties or characteristics, such as color, structure, texture, consistency, amount of organic matter, and degree of acidity or alkalinity.⁴⁵

soil organic matter The organic fraction of the soil that includes plant and animal residues at various stages of decomposition, cells and tissues of soil organisms, and substances synthesized by the soil population.⁴⁶

soil structure The combination or arrangement of primary soil particles into secondary particles or units. The secondary units are characterized and classified on the basis of size, shape, and degree of distinctness into classes, types, and grades respectively. Examples are: platy, prismatic, columnar, blocky, granular, and crumb.⁴⁷

solar exposure refers to the exposure of the road surface to the rays of the sun. Solar exposure can be blocked by land forms, structures, and vegetation adjacent to the roadway.

⁴³ Ibid, p. 553.

⁴⁴ TRB, 1996

⁴⁵ Ibid, p. 558.

⁴⁶ Ibid, p. 561.

⁴⁷ Ibid, p. 561.

species Includes any subspecies of fish, wildlife, or plants; any distinct population segment of any species of vertebrate fish or wildlife that interbreeds when mature.⁴⁸

steppe A grass covered semi-arid plain, such as those found in Washington east of the Cascade mountain range.

stormwater That portion of precipitation that does not naturally percolate into the ground or evaporate, but flows via overland flow, interflow, channels, or pipes into a defined surface water body or infiltration facility.

Stormwater Site Plan (SSP) A plan that shows the measures that will be taken during and after project construction to provide erosion, sediment, and stormwater control. Specific elements of the plan are outlined in the [Highway Runoff Manual](#).


swale A shallow drainage conveyance with relatively gentle side slopes, generally with flow depths less than one foot. May be designed for infiltration, biofiltration, or water conveyance.

subsoil The soil layers below the topsoil that contain little or no organic matter.

sustainable roadsides are those roadsides that are designed and maintained with the intent of integrating successful physical, environmental and visual functions with low life cycle costs.

Temporary Erosion and Sediment Control (TESC) Plan A plan required on any project involving earthwork. The specific elements are outlined in the [Highway Runoff Manual](#).

texture The visual interplay of light and shadow created by variations in the surface of an object. Grain or nap of a landscape or a repetitive pattern of tiny forms. Visual texture can range from smooth to coarse as seen in the sketch below.

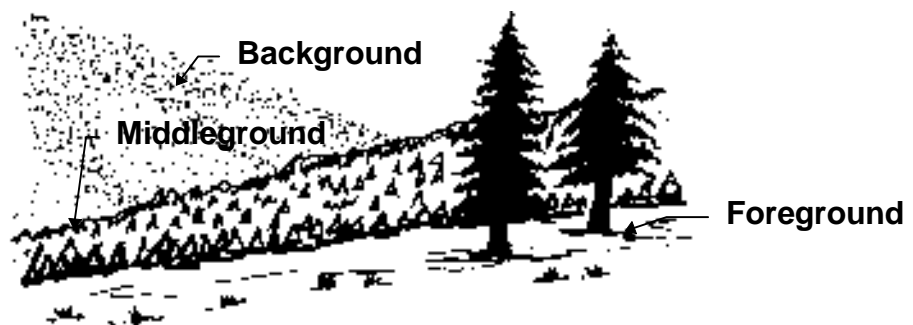

⁴⁸ Endangered Species Act, 1973

Figure 500.1 Texture

- threatened species*** Any species of plant or animal that is likely to become an endangered species within the foreseeable future throughout all or a significant portion of its range.⁴⁹
- tilth*** The physical condition of soil as related to its ease of tillage, fitness as a seedbed, and ease of seedling emergence and root penetration.⁵⁰
- topsoil*** The original or present, dark-colored, upper soil that ranges from a few millimeters to a meter thick at different locations.⁵¹
- Total Suspended Solids (TSS)*** The entire weight of organic and inorganic particles dispersed in a volume of water, expressed in milligrams per liter (mg/L).
- traffic barrier*** Any type of longitudinal barrier, including bridge rails, guardrails, earthen berms, or impact attenuators used to redirect vehicles from hazards located within the Design Clear Zone; to prevent median crossovers; to prevent errant vehicles from going over the side of a bridge structure; or to protect workers, pedestrians, or bicyclists from vehicular traffic.
- traveler information*** Commercial and non-commercial information that informs and orients the traveling public. Examples include access information for food, gas, lodging, local attractions, regional tourist attractions, roadway conditions, and construction schedules.
- tuber*** A swollen, usually underground stem, such as the potato, bearing buds from which new plant shoots arise.
- turbidity*** The visual clarity of the water as measured in Nephelometric Turbidity Units (NTUs). The turbidity, or clarity, of surface streams is an important determinant of its condition and productivity. Turbidity in water is caused by suspended and colloidal matter, such as clay, silt, organic and inorganic matter, and microorganisms. Turbidity does not settle out of water in a reasonable time period. The turbidity of drinking water is less than 1 NTU, while the turbidity of stream water can vary from fewer than 10 NTUs to greater than a few hundred NTUs.

⁴⁹ ESA, 1973

⁵⁰ Ibid, p. 570.

⁵¹ Ibid, p. 570.

- unity** Landscape with a quality or state of being made whole or a condition of harmony.
- “unsuitable soils”** Generally organic soils that are not appropriate for engineering functions. These soils might be ideal for roadside restoration and revegetation functions.
- vicinity zones** Areas on the National Highway System and on Scenic and Recreational Highways that need a safety rest area or roadside park facility in order to meet WSDOT service objectives.
- view** Something that is looked toward or kept in sight, especially a broad landscape or panorama. Act of looking toward an object or scene
- visitor information center** A staffed or non staffed facility that displays and dispenses free tourist and travel maps and brochures.
- vista** A confined view, especially one seen through a long passage, as between rows of trees or down a canyon. A vista often focuses upon a specific feature in the landscape.
- Volunteer Refreshment Program** A program that allows non-profit service organizations to serve refreshments to the traveling public on a donation basis.
- water bars** Small logs, or concrete barriers, usually less than 15cm in diameter, placed along a trail or slope to intercept the downhill flow of precipitation and direct it to a desired location.
- water quality standards** The discharge of polluted waters to waters of the state is a violation of the Washington State Water Pollution Control Law (RCW 90.48.080). Ecology establishes surface water quality standards (WAC 173-021A) as required by the Environmental Protection Agency (EPA). These standards are intended to protect surface waters of the state for beneficial uses including: public health, enjoyment, and the propagation and protection of fish, shellfish, and wildlife. State water quality criteria are defined for classifications of waters and include turbidity, fecal coliforms, dissolved oxygen, temperature, and pH. All water discharged from construction sites shall meet the water quality standards for turbidity at the discharge point into the surface water resource. There is not a “dilution” or “mixing zone.” Turbidity shall not exceed 5 NTUs over the water resource’s turbidity when the water resource’s turbidity is 50 NTUs or less, or have more than a

10 percent increase in turbidity when the water resource's turbidity is more than 50 NTUs.

watershed An area of land surface defined by a topographic divide that collects precipitation into a stream or river. Sometimes referred to as a drainage basin.

wattle A length of straw contained in a sausage-shaped netting. These are biodegradable and are generally buried to half their depth along the contour to slow water flow and trap sediment.

weed Any plant growing in a location in which it is not desired. A plant growing out of place.

wetland Wetlands are defined under the Clean Water Act as “those areas that are inundated or saturated by surface or groundwater at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas.” Areas do not need to have surface water throughout the year to qualify as wetlands.⁵²

wetland banking A form of compensatory mitigation where typically a large mitigation site is developed using creation and/or restoration. This is developed in advance of project wetland impacts. Credit is withdrawn from the bank to compensate for unavoidable wetland impacts. This is generally accomplished through a written agreement signed by regulatory agencies governing the use of the bank.

wetland buffer The area adjacent to a wetland that serves to protect the wetland from outside influences. Wetland buffers also contribute to the integral functions of the wetland. Regulated buffer widths vary depending upon the quality of the wetland and guidelines established by the local jurisdiction under the state Growth Management Act. Required buffer widths will be identified in the project's wetland/biology report. Wetland buffers must be shown on contract plans sheets. No work may occur within an identified wetland buffer area unless it has been approved by the appropriate permitting agency.

wetland functions The physical, chemical, and biological processes that can be attributed to a wetland ecosystem. Wetland functions are generally grouped into three categories: (1)

⁵² Clean Water Act, 1972

habitat (providing the factors and conditions necessary to support wetland-dependent species); (2) *water quality* (improving the quality of downstream surface and groundwaters through the uptake of contaminants, sediment retention, nutrient retention, supply, and so forth); (3) *hydrology* (moderating surface and groundwater flows, including flood attenuation, maintenance of base flow, and so forth).⁵³

wildflowers Native flowering plants including flowering forbes, shrubs and trees.

wildlife Any undomesticated animals, including vertebrates and invertebrates.

xeriscape A landscaping concept based on water conservation through the use of plant materials and techniques appropriate for dry climates or site conditions.

⁵³ Transportation Research Board. *Report 370: Guidelines for the Development of Wetland Replacement Areas*. Washington, D.C.: National Academy Press, 1996. pp 71-8.

Auxiliary Functions	600-1	Policies	230-3
General	600-1	Environmental	230-3
Contour Grading	720-1	References	230-5
Baseline, Stations, and Offset		Region and Route-Specific	230-2
Points (Figure 720.4)	720-8	Roadside Plans	
Construction	720-7	State Highway System Plan	230-1
Contour Design	720-5	Statewide Roadside Plans	230-2
Contour Grading Plans	720-2	Visual Quality	230-4
Contours (Figure 720.1)	720-3	Designated & Sensitive Areas	410-1
Definitions	720-1	Construction	410-5
angle of repose	720-1	Definitions	410-1
berm	720-1	critical area	410-1
contour	720-1	critical habitat	410-1
contour interval	720-2	designated lands	410-2
cross section	720-2	endangered species	410-2
cut	720-2	Environmental Resource	410-2
datum	720-2	Area	
elevation	720-2	sensitive areas	410-2
fill	720-2	threatened species	410-3
finish grading	720-2	Design	410-4
grading	720-2	General	410-1
interpolation	720-2	Maintenance	410-5
profile	720-2	Planning	410-3
section	720-2	References	410-1
Earth Berms	720-10	Resources	410-1
English Station and Offset	720-9	Environmental Functions	400-1
Table (Table 720.2)		Agency Involvement	400-2
General	720-1	(Table 400.1)	
Metric Station and Offset	720-9	General	400-1
Table (Table 720.1)		Erosion Prevention and	710-1
References	720-1	Sediment Control	
Resources	720-1	Advantages and	710-13
Roadside Berm Example	720-10	Disadvantages of Rolled	
(Figure 720.5)		Erosion...Types (Table 710.2)	
Slope Rounding	720-6	Definitions	710-2
(Figure 720.2)		Best Management Practices	
The Grid (Figure 720.3)	720-7	(BMPs)	710-2
Varying Distance Between	720-12	bioregion	710-2
Contours (Figure 6)		check dam	710-2
Departmental Policy and Planning	230-1	detention facility	710-2
Directives	230-5	erosion	710-2
Heritage Resources	230-4	erosion prevention and	
Planning	230-1	sediment control	710-3
Transportation Commission		fascine	710-3
Policy Catalog	230-1		

hydraulic conveyance system		Design/Maintenance	210-3
710-3		Water Quality	210-2
retention	710-3		
retention/detention facility		Glossary	1
710-3			
settleable solids	710-3	Irrigation	820-1
steppe	710-3	Construction	820-9
Stormwater Site Plan	710-3	Definitions	820-1
tackifier	710-4	approved	820-1
Temporary Erosion and	710-4	atmospheric vacuum	820-1
Sediment Control Plan	710-4	breaker (AVB)	
Total Suspended Solids		backflow	820-1
turbidity	710-4	backflow prevention	820-2
water bars	710-4	assembly	
water quality standards	710-4	backpressure	820-2
wattle	710-4	backsiphonage	820-2
Erosion Prevention Measures	710-6	check valve	820-2
Example of Silt Fence	710-11	conduit	820-2
Installation (Figure 710.3)		contamination	820-2
General	710-1	cross connection	820-2
Groove Slopes Along Contours		double check valve	
(Figure 710-1)	710-9	assembly (DCVA)	820-2
Methods	710-8	potable water	820-2
Process of Erosion	710-5	pressure vacuum breaker	820-2
Recommended Erosion	710-7	assembly	
Prevention Practices		reduced pressure backflow	
(Table 710.1)		assembly	820-2
References	710-1	service connection	820-3
Resources	710-2	sleeve	820-3
Rolled Erosion Prevention	710-12	Design	820-4
Fabric Installation		General	820-1
(Figure 710.4)		Irrigation Sleeve (Figure 820.1)	
Sediment Control Measures	710-7		820-7
Site Analysis	710-5	Maintenance	820-9
Soil Profile After Tilling to		Planning	820-3
Mix Soil Layers (Figure 710.2)		References	820-1
710-9		Resources	820-1
Federal Legislation and Directives	210-1	Manual Description	100-1
Air Quality	210-2	Definitions	100-2
Biology/Wetlands	210-2	Format	100-2
Environment	210-1	General	100-1
General	210-1	Purpose	100-1
Noise	210-3	Revisions	100-2
Planning	210-1		
Policy	210-2	Noise Abatement	460-1
Visual Quality	210-3	Additional Sources of	

Information	460-16	Roadside Policy	200-1
Construction	460-15	General	200-1
Coordination for Noise	460-13	Procedures	200-1
Abatement Measures (Table 460.2)		Public Involvement	200-1
Definitions	460-2	Roadside Safety	310-1
decibel	460-2	Clear Zone	310-3
dBA (A-Weighted Sound Level)	460-2	Clear Zone Example (Figure 310.1)	310-2
insertion loss	460-2	Definitions	310-2
Leq	460-2	fixed service item	310-2
receiver	460-2	maintenance pull-off	310-2
receptor	460-2	solar exposure	310-2
Design	460-12	Fire Control	310-5
General	460-1	General	310-1
Maintenance	460-16	Possible Main Access Road (Figure 310.3)	310-8
Noise Abatement Decision Process (Figure 460.1)	460-3	References	310-1
Public Involvement	460-9	Resources	310-2
References	460-1	Roadway Shading	310-5
Requirements for Consideration	460-5	Security	310-9
Requirements for Noise Analysis	460-2	Sight Distance	310-3
Resources	460-1	Sight Distance (Figure 310.2)	310-4
Operational Functions	300-1	Sunlight and Headlight Glare	310-6
Additional Sources of		Traffic Barriers	310-4
Information	300-3	Worker and Pedestrian Safety	310-7
Delineation	300-2	Maintenance Crew Safety	310-7
Design Objectives	300-1	Safety Rest Areas & Traveler Services	610-1
General	300-1	Agreements	610-2
Hydraulics	300-2	Buildings	610-12
References	300-1	Definitions	610-3
Snow Drift Control	300-2	ancillary services	610-3
Snow Storage	300-2	DCTED	610-3
Utilities	300-3	information display	610-3
Roadside Functions	110-1	kiosk	610-3
Definitions	110-1	point of interest	610-3
General	110-1	recreational vehicle (RV)	610-3
Roadside Functions (Table 110.1)	110-2	recreational vehicle account	610-3
Roadside Management	110-3	Recreational Vehicle Citizens	
Roadside Management Zones (Figure 110.2)	110-3	Advisory Committee	610-3
		roadside park	610-3
		safety rest area roadside	610-4
		master plan	

safety rest area	610-4	soil	700-3
safety rest area team	610-4	soil horizons	700-3
traveler information	610-4	soil organic matter	700-4
vicinity zones	610-4	soil structure	700-4
visitor information center	610-4	subsoil	700-4
Volunteer Refreshment program	610-4	tilth	700-4
General	610-1	topsoil	700-4
Level of Development	610-17	unsuitable soils	700-4
Level of Development for Roadside Use Facilities	610-18	Design	700-8
Location and Site Design	610-6	General	700-1
Operations	610-13	Maintenance	700-13
Policy	610-5	Planning	700-8
References	610-1	Procedures	700-9
Resource Matrix	610-17	References	700-2
Resources	610-1	Resources	700-2
Utilities and Infrastructure	610-10	Soil Amendments	700-6
WSDOT Service Objectives and Safety Rest Area Goals (Table 601.1)	610-5	Structural Soils	700-7
		Structure and Disturbance	700-5
		Summary of Recommended Practices (Table 700.1)	700-5
Signing	320-1	State Legislation and Directives	220-1
General	320-1	Biology/Wetlands	220-2
Primary Considerations	320-2	Environmental	220-1
References	320-1	General	220-1
Resources	320-1	Maintenance	220-4
		Noise	220-3
		Partnerships	220-5
Soil and Soil Amendments	700-1	Planning	220-1
Amendments to Encourage Native Plants (Figure 700.2)	700-12	Rest Areas	220-5
Construction	700-12	Visual Quality	220-3
Definitions	700-2	Water Quality	220-2
biosolids	700-2	Sustainable Roadsides	120-1
clay	700-2	Definition	120-1
climax vegetation	700-2	General	120-1
compost	700-2	Managing for Sustainable Roadsides	120-1
humus	700-2	20-Year Planning Horizon	120-2
leaching	700-2	Continued Cooperative Involvement	120-2
loam	700-2	Design Intent	120-1
microorganisms	700-3	Projected Life Cycle Costs	120-2
mottling	700-3	Reference	120-1
pioneer species	700-3	Resource	120-1
pore species	700-3	Utilize, Protect...Roadside Infrastructure	120-2
ripping	700-3		
sand	700-3		
silt	700-3		

Universal Access	620-1
Additional Sources of Information	620-5
Construction	620-5
Definitions	620-2
ADA	620-2
accessible route of travel	620-2
facility	620-2
ramp	620-3
Design	620-3
General	620-1
Maintenance	620-5
Planning	620-3
References	620-1
Resources	620-2
Vegetation	800-1
Additional Sources of Information	800-21
Construction	800-19
Definitions	800-2
blend	800-2
buffer	800-2
climax vegetation	800-3
corridor management	800-3
plans	
cuttings	800-3
ecological succession	800-3
enclose	800-3
expose	800-3
forb	800-4
groundcover	800-4
herbaceous plant	800-4
live poles	800-4
live stakes	800-4
native plant	800-4
plant material	800-4
reference site	800-4
rhizome	800-4
roadside classification	800-4
roadside restoration	800-4
roadside treatment strategies	800-4
scenic and recreational highways	800-5
screen	800-5
seedlings	800-5

shrub	800-5
sustainable roadsides	800-5
tuber	800-5
weed	800-5
wildflowers	800-6
xeriscape	800-6
Design	800-9
Examples of Some Functions of Roadside Vegetation (Figure 800.3)	800-7
Maintenance	800-19
Planning	800-8
Plant Selection for the Example (Table 810.1)	800-18
References	800-1
Resources	800-2
Use of Vegetation to Screen A Wall (Figure 800.2)	800-5
Vegetation	800-6
Vegetation Restoration	810-1
Accelerated Climax Plant	810-7
Additional Sources of Information	810-13
Climax Plant Communities	810-4
Community Development	810-7
Methods for Managing Succession	
Construction Scheduling	810-11
Contracts and Schedules	810-10
Controlled Colonization	810-9
Controlled Species	810-9
Definitions	810-2
accelerated climax plant community	810-2
allogenic succession	810-2
autogenic succession	810-2
climax vegetation	810-2
enhancement	810-2
genotype	810-2
managed succession	810-2
plant association	810-2
plant community	810-2
plant succession	810-2
reference site	810-2
restoration	810-3
succession	810-3

Designed Disturbance	810-8	References	500-2
Disturbance and Succession	810-3	Resources	500-2
Eastern Washington	810-5		
General	810-1	Water Quality	440-1
Genetic Diversity	810-4	Additional Sources of	440-12
Grasses and Forbs	810-11	Information	
Growing Contracts	810-10	Area of Responsibility	440-5
Landscape Contracts	810-11	During Planning (Table 440.1)	
Lowland Western Washington	810-6	Construction	440-9
		Definitions	440-2
Maintenance and Monitoring	810-12	Best Management	440-2
Managed Succession	810-5	Practices (BMPs)	
Plant Establishment	810-10	biofiltration	440-2
Performance Evaluation		buffer	440-2
References	810-1	detention pond	440-2
Resources	810-2	impervious surface	440-2
Vegetation Restoration	810-5	infiltration	440-2
Concepts		retention pond	440-2
Woody Vegetation	810-11	runoff	440-3
		stormwater	440-3
Visual Functions	500-1	Stormwater Site Plan	440-3
Additional Sources of	500-10	swale	440-3
Information		Temporary Erosion and	440-3
Definitions	500-3	Sediment Control Plan	
aesthetics	500-3	(TESC)	
cognition	500-3	watershed	440-3
coherence	500-3	Design	440-5
complexity	500-3	General	440-1
control	500-3	Highway Runoff Manual	440-3
corridor continuity	500-3	Highway Runoff Program	440-3
expectancy	500-3	Maintenance	440-10
feature	500-3	Planning	440-4
form	500-4	References	440-1
landscape	500-4	Resolving Conflicting Needs	440-10
navigation	500-4	Maintenance Requirements	440-11
view	500-4	Wetlands & Stormwater	440-10
vista	500-4	Resources	440-1
Design	500-6	Roles During Construction	
Forms in the Landscape		(Table 440.3)	440-9
(Figure 500.2)	500-4	Roles During the Design	
General	500-1	Phase (Table 440.2)	440-8
Input & Output Model for	500-1	Typical Best Management	440-6
Roadside Visual Functions		Practices in the Roadside	
(Figure 500.1)		(Figure 440.1)	
Maintenance	500-9		
Planning	500-5	Wetlands	420-1
Policy	500-4	Additional Sources of	420-14

Information		old growth forest	450-2
Construction of Mitigation	420-11	riparian	450-2
Wetlands		species	450-2
Definitions	420-2	threatened species	450-3
compensatory mitigation	420-2	wildlife	450-3
constructed wetlands	420-2	Design	450-4
created wetlands	420-2	General	450-1
delineated wetland	420-2	Maintenance	450-6
ditches	420-2	Planning	450-3
exotic species	420-3	References	450-1
groundwater	420-3	Resolving Conflicting	450-7
habitat	420-3	Requirements	
hydrology	420-3	Resources	450-1
impact	420-3		
indicator	420-3		
invasive vegetation	420-3		
jurisdictional wetlands	420-3		
monitoring	420-3		
natural wetlands	420-4		
nonjurisdictional wetlands	420-4		
pollutant	420-4		
restoration	420-4		
soil erosion	420-4		
wetland	420-4		
wetland banking	420-5		
wetland buffer	420-5		
wetland functions	420-5		
Design	420-8		
Design wetland mitigation	420-9		
wetlands			
General	420-1		
Maintenance	420-13		
Monitoring	420-12		
Planning	420-5		
References	420-1		
Resources	420-2		
Wildlife	450-1		
Construction	450-6		
Definitions	450-2		
anadromous	450-2		
critical habitat	450-2		
endangered species	450-2		
habitat	450-2		
listed species	450-2		
migration corridor	450-2		
native	450-2		